

EMI Suppression Beads (2661023801)



Part Number: 2661023801

61 SHIELD BEAD

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1= Not Burnished 2 = Burnished
- The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002").

Fair-Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.

Catalog Drawing 3D Model

The C dimension, the bead length, can be modified to suit specific applications.

<u>Weight:</u> 1.4 (g)

| Dim | mm | mm tol | nominal inch | inch misc. | 1515 | 39 | |
|-----|-------|--------|--------------|------------|-------|----|-----------------------------------------|
| A | 5.1 | ±0.25 | 0.201 | | | -1 | |
| В | 1.45 | +0.25 | 0.062 | _ | | В | 77777777 |
| С | 22.85 | ±0.75 | 0.9 | _ | | Ī | V-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1 |
| | | | | | - ^ - | | |

Chart Legend

- + Test frequency
- The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual

NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note [How to choose Ferrite Components for EMI Suppression].


| Typical Impedance (Ω | | | | | |
|------------------------------|-----|--|--|--|--|
| 100 MHz | 270 | | | | |
| 250 MHz ⁺ | 367 | | | | |
| 500 MHz ⁺ | 422 | | | | |
| 1000 MHz | 412 | | | | |
| Electrical Properties | | | | | |
| H(Oe) | 1.5 | | | | |

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Catalog Drawing

Single turn impedance tests for 73 and 43 material beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

| Typical Impend | γpical Impendance ($Ω$) | | | | | |
|----------------------|---------------------------|--|--|--|--|--|
| 100 MHz | 210 | | | | | |
| 250 MHz ⁺ | 286 | | | | | |
| 500 MHz ⁺ | 325 | | | | | |
| 1000 MHz | 350 | | | | | |

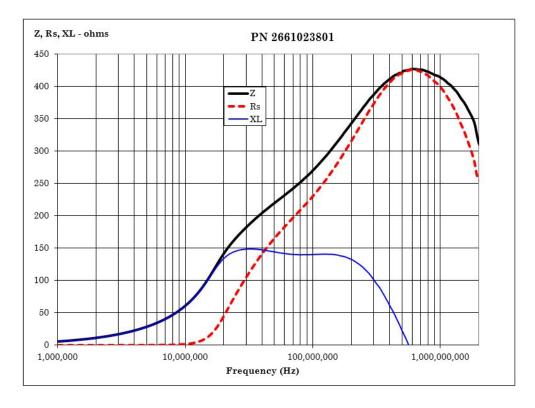

CSV Download

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com