

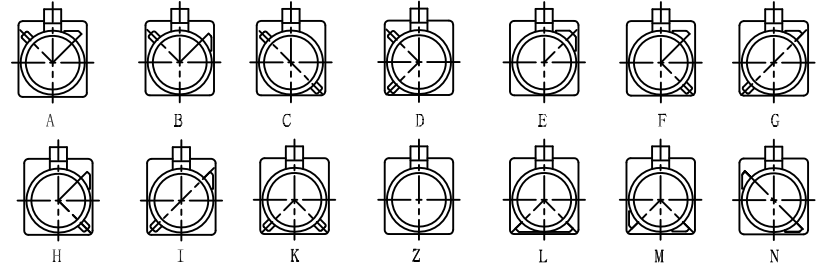
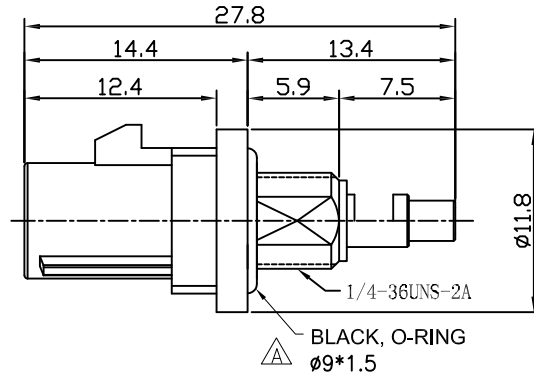



APPROVED: _____
 DATE: _____ TITLE: _____



Rev	AWO #	Description	Date	Appr
-		RELEASED	6/6/18	
A		ADD O-RING SPEC.	04/27/20	TW
B		UPDATE TITLE SPEC. & DIM.	8/7/20	AY/RC
C		UPDATED DRAWING	5/4/22	JJ/KL

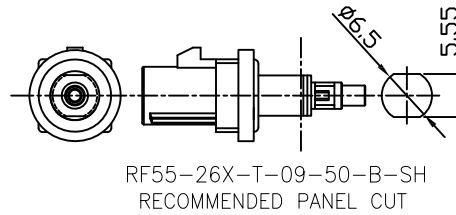


Port Type

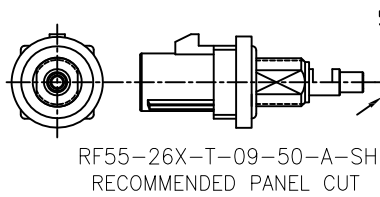

Type	Color	For Cable	Item No
A	BLACK	1.13/1.32 1.37mm Dia.	RF55-26A-T-09-50-X-SH
B	WHITE		RF55-26B-T-09-50-X-SH
C	BLUE		RF55-26C-T-09-50-X-SH
D	BORDEAUX VIOLET		RF55-26D-T-09-50-X-SH
E	GREEN		RF55-26E-T-09-50-X-SH
F	BROWN		RF55-26F-T-09-50-X-SH
G	GREY		RF55-26G-T-09-50-X-SH
H	VIOLET		RF55-26H-T-09-50-X-SH
I	BEIGE		RF55-26I-T-09-50-X-SH
K	CURRY		RF55-26K-T-09-50-X-SH
Z	WATER BLUE		RF55-26Z-T-09-50-X-SH
L	CARMINE RED		RF55-26L-T-09-50-X-SH
M	PASTEL ORANGE		RF55-26M-T-09-50-X-SH
N	PASTEL GREEN		RF55-26N-T-09-50-X-SH

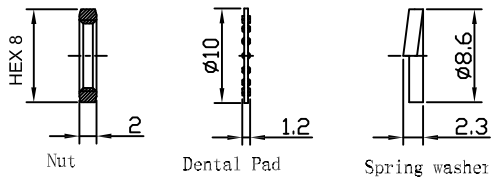

DESCRIPTION	MATERIAL	FINISH
O-RING	BLACK SILICA GEL	
PLASTIC SHELL	PA66+30%GF	
COPPER TUBE	BRASS	NICKEL
INSULATOR	PTFE	
PIN CONTACT	BRASS	GOLD
BODY	BRASS	TRREE ELEMENT ALLOY



SPECIFICATIONS:

Electrical:
 Frequency range: DC~6 GHz
 Nominal Impedance: 50 ohms
 Withstanding voltage: 335 V
 Insulator Resistance: 1000 MΩ
 Contact Resistance: 6 Milliohms max. (Center Contact)
 1 Milliohms max. (Outer Contact)

Temperature Rating:
 Operating temperature: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



See sht 2 for assembly instructions

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	±.10	∅X	±.10
.XX	±.020	∅XX	±.015
.XXX	±.015	∅XXX	±.010

DRAWN	AY	6/6/18
CHECKED	MY	6/6/18
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH



909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE		
FAKRA PLUG SMB TYPE STRAIGHT, BULKHEAD (IP67)		
SIZE	PART NO.	REV.
X	RF55-26X-T-09-50-X-SH	C
REF:	S00134C	SCALE: NTS SHEET 1 OF 2

6

5

4

3

2

1

6

5

4

3

2

1

4

3

2

1

Rev

AWO #

Description

Date

Appr


SEE SHT 1 OF 2 FOR REVISION

FAKRA connector cable assembly instructions

STEP 1


PARTS NEEDED

A = Fakra Connector B = Metal Sleeve C = Heat Shrink Tubing
(customer supplied)

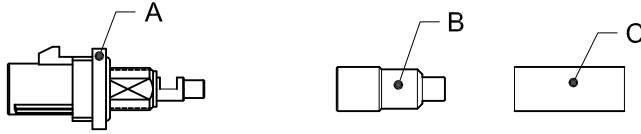


STEP 2

Strip Cable per below stripping lengths
Conductor 1.5mm / Dielectric 1.2mm / Braid 3.2mm

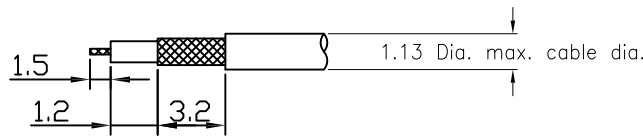


STEP 3

Slide cable through metal sleeve "B" and heat shrink "C"




STEP 4

Insert cable into back of connector and solder conductor

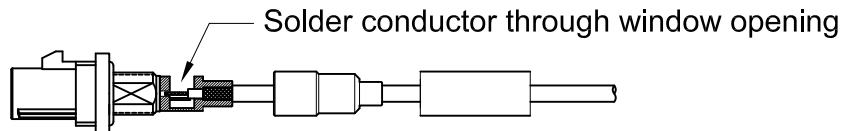


STEP 5

Slide metal sleeve "B" over back of connector.

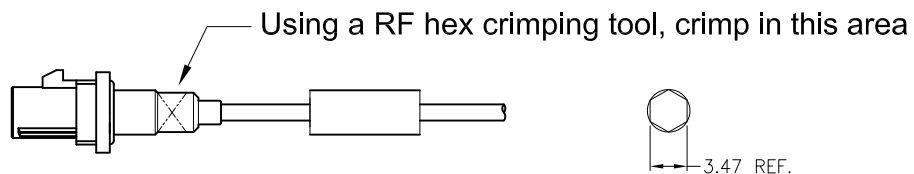

STEP 6

Slide heat Shrink over back of connector and heat with heat gun

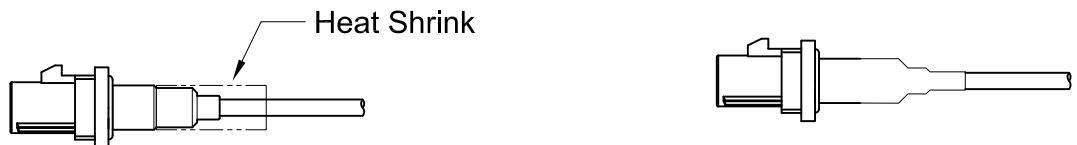

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	∅X	± .10
.XX	± .020	∅XX	± .015
.XXX	± .015	∅XXX	± .010

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

DRAWN	AY	6/6/18
CHECKED	MY	6/6/18
APPROVED		

TITLE
FAKRA PLUG SMB TYPE STRAIGHT, BULKHEAD (IP67)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

SIZE X	PART NO. RF55-26X-T-09-50-X-SH	REV. C
REF: S00134C	SCALE: NTS	SHEET 2 OF 2

4

3

2

1