

# EMI Suppression Beads (2643006302)



Part Number: 2643006302

43 SHIELD BEAD

#### **Explanation of Part Numbers:**

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1= Not Burnished 2 = Burnished
- The last digit of the Parylene coated part is a "4," which is available upon request. The minimum coating thickness beads is 0.005 mm (0.0002").

Fair-Rite offers a broad selection of ferrite EMI suppression beads with guaranteed minimum impedance specifications.

Our "Shield Bead Kit" (part number 0199000019) contains a selection of these beads.

For any EMI suppression bead requirement not listed here, feel free to contact our customer service for availability and pricing.

# Catalog Drawing 3D Model

The C dimension, the bead length, can be modified to suit specific applications.

#### <u>Weight:</u> 2.2 (g)

Dim	mm	mm tol	nominal inch	inch misc.	72 (-2			
A	9.5	±0.25	0.374	_		В		
В	4.75	+0.30	0.193	_				
С	10.4	±0.25	0.409	_		Ţ		
					- A -		- C -	

### **Chart Legend**

- + Test frequency
- The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual

NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note [How to choose Ferrite Components for EMI Suppression].


Typical Impedance (Ω					
10 MHz		41			
25 MHz <sup>+</sup>		59			
100 MHz <sup>+</sup>		83			
250 MHz		100			
Electrical Properties					
H(Oe)	0.6				

Suppression beads are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

## **Catalog Drawing**

Single turn impedance tests for 73 and 43 material® beads are performed on the E4990A Impedance Analyzer. The 61 material beads are tested on the E4991A / HP4291B Impedance Analyzer. Beads are tested with the shortest practical wire length.

Typical Impendance ( $\Omega$ )				
10 MHz	34			
25 MHz <sup>+</sup>	53			
100 MHz <sup>+</sup>	80			
250 MHz	92			

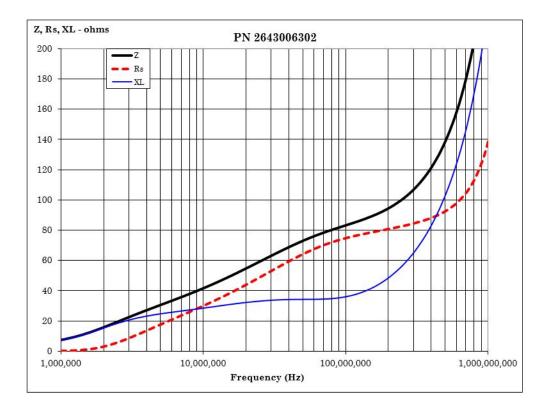

#### **CSV** Download

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com