

Series 801 Mighty Mouse Double-Start ACME Thread Sav-Con® Connector Saver 801-017 Ordering Information



Series 801



Glenair Sav-Con® Connector Savers are designed to protect connectors that are subject to repeated mating and unmating cycles. Sav-Con® Connector Savers prevent costly repair or replacement of expensive connectors while preserving the quality and integrity of the connector by absorbing connect and disconnect abuse.


Protect Equipment. Equipment connectors that are mated frequently during manufacturing, test, check-out phases and environmental test programs can be protected by Glenair Sav-Con® Connector Savers.

Prolong the Service Life of Test Cables. Glenair Sav-Con® Connector Savers mated to test-cable connectors take the punishment of repetitive mating and unmating connectors.

How To Order					
Sample Part Number	801-017	M	6-7	P	A
Series	801-017 = Series 801 Connector Saver				
Material and Finish	C = Aluminum / Black Anodize (Non-Conductive) M = Aluminum / Electroless Nickel NF = Aluminum / Cadmium with Olive Drab Chromate ZN = Aluminum / Zinc-Nickel with Olive Drab Chromate Z1 = Stainless Steel / Passivated				
Shell Size - Insert Arrangement	See Contact Arrangements page D-3				
Contact Type	P = Pin Contact on Plug Side, Socket Contact on Receptacle Side S = Socket Contact on Plug Side, Pin Contact on Receptacle Side				
Polarization (See Table I and II)	A = Normal B = Pos. B C = Pos. C D = Pos. D E = Pos. E F = Pos. F G = Pos. G H = Pos. H J = Pos. J				


D

Table I: Key Positions (plug)



Key Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Table II: Keyway Positions (receptacle)



Position	A°	B°
A	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

Dimensions in Inches (millimeters) are subject to change without notice.

© 2014 Glenair, Inc.

Series 80 Mighty Mouse

U.S. CAGE Code 06324

Printed in U.S.A.


GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com D-53 E-Mail: sales@glenair.com

Rev. 08.17.20



Series 801 Mighty Mouse Double Start ACME Thread Sav-Con® Connector Saver 801-017 Dimensions

Sav-Con® connector saver

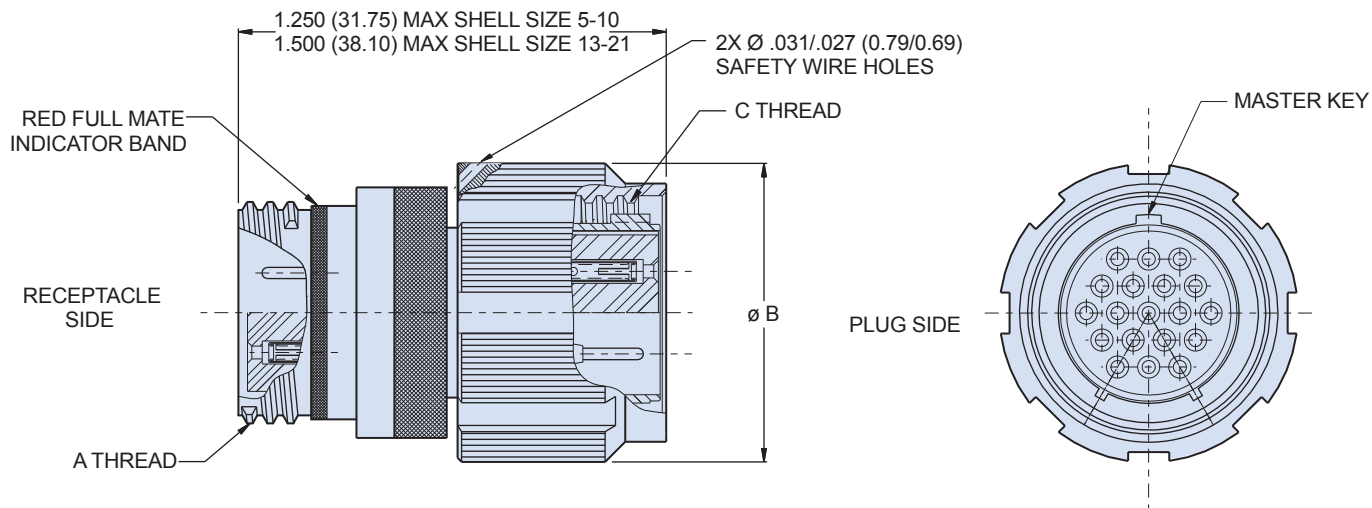

D

Dimensions			
Shell Size	A Thread	C Thread	Ø B
5	.3125-.05P-.1L-2A	.3125-.05P-.1L-2B	.540 (13.72)
6	.375-.05P-.1L-2A	.375-.05P-.1L-2B	.600 (15.24)
7	.4375-.05P-.1L-2A	.4375-.05P-.1L-2B	.680 (17.27)
8	.5000-.05P-.1L-2A	.5000-.05P-.1L-2B	.750 (19.05)
9	.5625-.05P-.1L-2A	.5625-.05P-.1L-2B	.810 (20.57)
10	.6250-.05P-.1L-2A	.6250-.05P-.1L-2B	.880 (22.35)
11	.6875-.05P-.1L-2A	.6875-.05P-.1L-2B	.920 (23.37)
13	.8125-.1P-.2L-2A	.8125-.1P-.2L-2B	1.050 (26.67)
16	1.000-.1P-.2L-2A	1.000-.1P-.2L-2B	1.240 (31.50)
17	1.062-.1P-.2L-2A	1.062-.1P-.2L-2B	1.300 (33.02)
19	1.1875-.1P-.2L-2A	1.1875-.1P-.2L-2B	1.400 (35.56)
21	1.3125-.1P-.2L-2A	1.3125-.1P-.2L-2B	1.550 (39.37)

Material / Finish

- Shell, jam-nut: aluminum alloy or stainless steel
- Contact: copper alloy, 50 µinch gold plated
- Insulator: high-grade rigid dielectric
- Seal: fluorosilicone rubber

Dimensions in Inches (millimeters) are subject to change without notice.