

5



4

3



2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

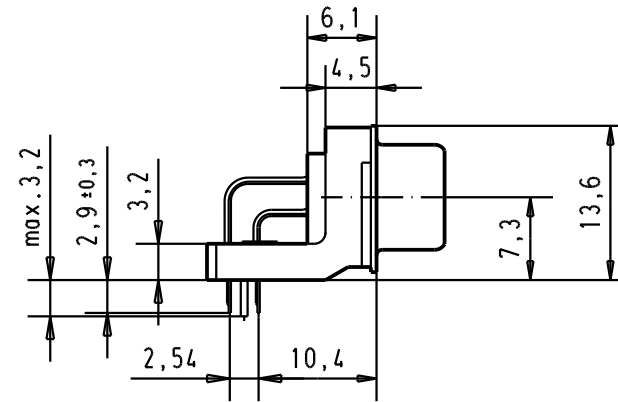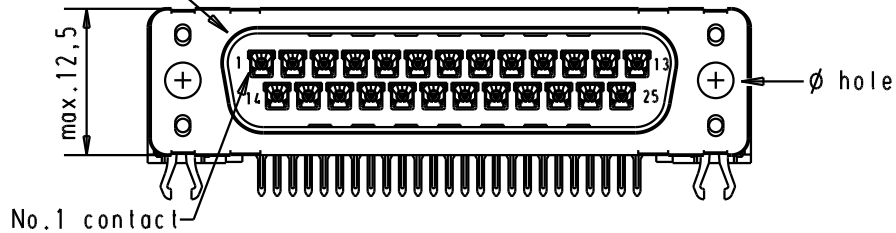


PCB layout hole
component side

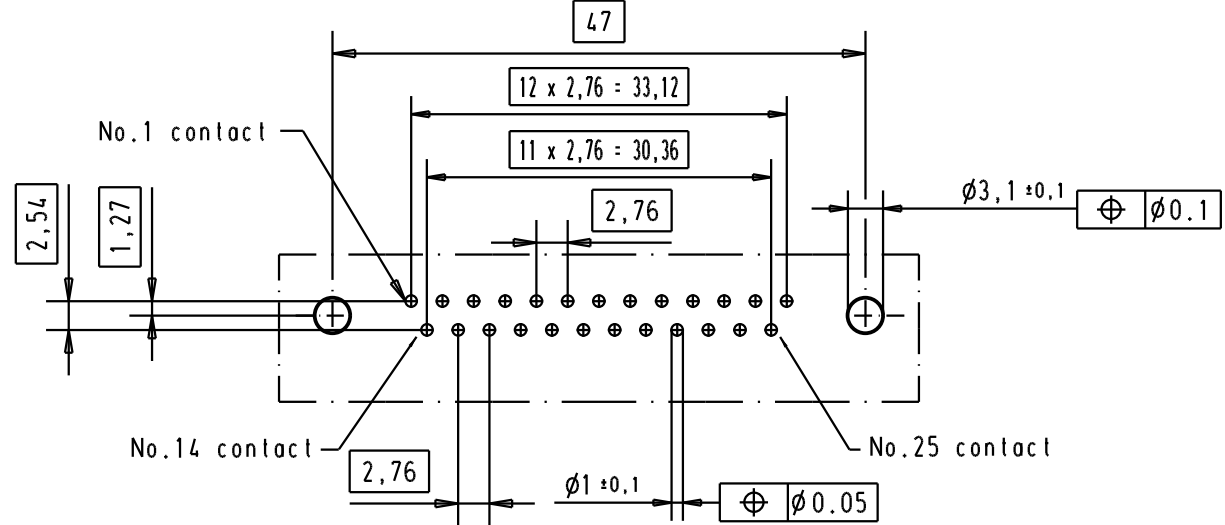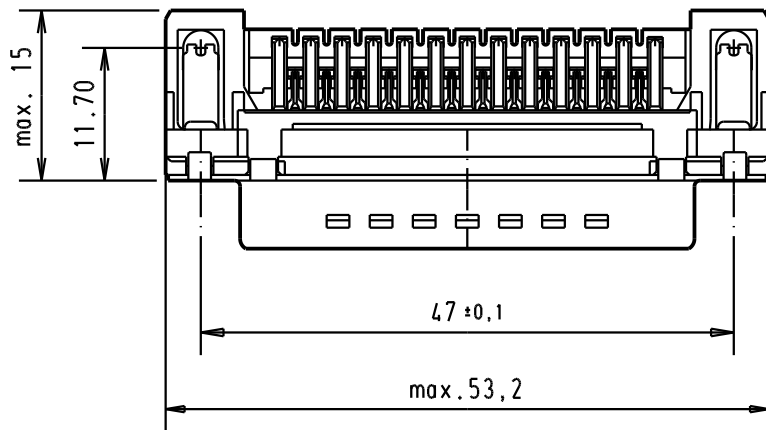

Connector retention and insertion forces on the PCB = 25 / 80 newtons

A

							Det.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, high temperature, male, standard, 25 poles, with solder pins 2.9, holes and grounding board lock.	Maßstab/ Scale 1.5:1	
						Detail.	05/03/02	CV				
						Insp.						
						Stand.						
09 65 366 3810	3.1 ± 0.1	1										
09 65 366 6810	3.1 ± 0.1	2	31892	22/04/04	JH	HARTING EURL F-95972 Paris					TB 0965366x81x	Blatt/ Page 2
09 65 366 7810	3.1 ± 0.1	3	29723	05/03/02	CV							
Part number	ø hole	Performance level	Mod.	Det.	Name					Sub.		



All Dim. in mm
Orig. Size DIN A 4

D-Sub, high temperature,
male, standard, 25 poles,
with solder pins 2.9, holes
and grounding board lock.

Maßstab/
Scale

1.5:1

Blatt/ Page

2