

Crystal Clear Technology

Product Specification

G32122X02 series

Crystal Clear Technology sdn. bhd.

16Jalan TP5—Taman Perindustrian Sime UEP
47600 Subang Jaya—Selangor DE
Malaysia. T: +603 80247099 F: +603 80247098

**1.0 Table of Contents**

	Page
1. Table of Contents	1
2. Record of revision	2
3. General specification	3
4. Absolute maximum ratings	4
5. Electrical characteristics	4
6. Environmental requirement	4
7. LCD specification	5 ~ 7
8. Interface	8
9. Functional Description	9 ~ 10
10. Instructions	10
11. Block Diagram and Power Supply	11
12. Quality assurance	12 ~ 13
13. Precautions in use LCM	14 ~ 15
14. Outline drawing	16



2.0 Record of revision

Rev	Date	Item	Page	Comment	Originator	Checked By
1.0	15/09/08			Initial Release	Syam	Azhar



3.0 General specification

Display format: Graphics 122 (w) x 32 (h) dots

Dot size: 0.40 (w) x 0.45 (h) mm

Dot pitch: 0.44 (w) x 0.49 (h) mm

View area: 60.5 (w) x 18.5 (h) mm

Active area: 53.64 (w) x 15.64 (h) mm

General dimensions: 84.0 (w) x 44.0 (h) x 14.0 max (t) mm

Controller/Driver: SBN1661 or equivalent

Interface: Parallel

Driving method: 1/32 duty

G	3	2	1	2	2		0	2				0	0
---	---	---	---	---	---	--	---	---	--	--	--	---	---

MODEL NUMBER
STD. GRAPHIC : No. of rows followed by no. of column
SERIES NUMBER FOR THIS STANDARD SPECIFICATION

BACKLIGHT MODE
L : Bottom Led Backlight (Yellow Green)
R : Bottom Led Backlight (Red)
W : Side Led Backlight (White)
B : Side Led Backlight (Blue)
N : No Backlight

MODULE VERSION
SERIES NUMBER FOR THIS STANDARD SPECIFICATION

LCD MODE
Y : Yellow Green (STN)
G : Grey (STN)
B : Black & White (FSTN)
N : Negative (FSTN) Blue (Single Retardation)
U : Negative (FSTN) Black/White (Double Retardation)
S : Negative (STN) Purple
L : Negative (STN) Blue
Z : Negative (FSTN) Black/White (Double Retardation) TRI-AXIS

VIEWING ANGLE
T : Top view (12 O'clock)
B : Bottom view (6 O'clock)

OPERATING TEMPERATURE
N : Normal Temperature (0°C to +50°C), where storage temperature is (-20°C to +70°C)
W : Wide Temperature (-20°C to +70°C), where storage temperature is (-30°C to +80°C)

SEMI - CUSTOMISE (MINOR CHANGES FROM STANDARD MODEL)
00 - STANDARD SPECIFICATION MODEL
REFER TO FACTORY FOR OTHER VERSIONS. TERMS AND CONDITIONS APPLY

**4.0 Absolute maximum rating (at $V_{SS} = 0V$, ambient temperature = $25^{\circ}C$)**

NO	ITEM	SIMBOL	MIN	MAX	UNIT
1.	Power Supply Voltage (Logic)	$V_{DD} - V_{SS}$	-0.3	7.0	V
2.	Power Supply Voltage (LCD Driver)	$V_{DD} - V_{EE}$	-	13.0	V
3.	Operating Temperature	T_{op}	Refer page 3		$^{\circ}C$
4.	Storage Temperature	T_{st}	Refer page 3		$^{\circ}C$

5.0 Electrical characteristics

NO	ITEM	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
1.	Power Supply Voltage (Logic)	$V_{DD} - V_{SS}$	-	4.5	5.0	5.5	V
2.	Power Supply Voltage (V_{LCD})	$V_{DD} - V_{EE}$	$25^{\circ}C$	$5.0 \pm 5\%$			V
3.	Input Voltage	V_{IH}	-	$V_{SS} + 2$	-	V_{DD}	V
		V_{IL}		$V_{SS} + 0.7$	-	$V_{SS} + 1.2$	
4.	Current Supply	I_{DD}	$V_{DD} - V_{SS} = 5V$ $V_{DD} - V_{EE} = 5V$	-	0.8	1.0	mA

5.1 Backlight Options

NO	COLOR	FORWARD VOLTAGE (V)			FORWARD CURRENT (mA)			MIN BRIGHTNESS (cd/m ²) *
		Min	Typ.	Max	Min	Typ.	Max	
1.	Yellow Green	-	5.0	-	-	65	85	100
2.	White	-	5.0	-	-	30	50	90
3.	Blue	-	5.0	-	-	30	50	70
4.	Red	-	5.0	-	-	80	120	80

*Note : 1. Brightness measured at backlight surface.

2. On LCD surface, brightness is only about 10% to 15% of backlight brightness.

3. Lifetime of backlight: For YG, Red = 50K hrs. For White, Blue = 20K hrs

6.0 Environmental requirements

NO	ITEM	CONDITION
1.	Operating Temperature	Refer page 3
2.	Storage Temperature	Refer page 3
3.	Operating Humidity	5% to 95%RH
4.	Cycle Test	0 C @ 30 min to 50 C @ 30min for 1 cycle run for 10 cycles
5.	Lifetime	50000 HOURS (excluding backlight)

Note: The background on LCD has the possibility to be changed in different temperature range.



7.0 LCD specification


7.1 Electro-optical characteristics (at ambient temperature = 25°C)

NO	ITEM	SYMBOL	CONDITION	LCD TYPE							REF.
				STN YG	STN GREY	STN -VE BLUE/ PURPLE	FSTN +VE B/W	FSTN -VE BLUE	FSTN - VE TRUE B/W	FSTN -VE TRI AXIS	
1	Operating Voltage (Volt)	V _{LCD}	θ = 0 Cr = max	5.0 ± 5%							7.1.1
2	Viewing Angle (Deg)	θ x 1	CR ≥ 2 V _{LCD} = 14.7V	+25	+20	+35	+25	+35	+35	+40	7.1.2
		θ x 2		-25	-20	-35	-25	-35	-40	-40	
		θ y 1		-30	-25	-35	-30	-35	-35	-50	
		θ y 2		+30	+25	+35	+30	+35	+35	+30	
3	Contrast Ratio	CR	θ = 0 ⁰ V _{LCD} =14.7V	3.0	2.3	6.0	3.0	6.0	20	20	7.1.3
4	Response Time (msec)	Rise Time (Tr)	θ = 0 ⁰	200							7.1.4
		Decay Time (Td)	θ = 0 ⁰	250							



Note:

1. Viewing angle data is based on bottom view product by default. Should it be a top view product, values are then swap.
2. Contrast ratio is based on typical data when using white colour as backlight.
3. Equipment Used Eldim; Ez Contrast 120R , Spot Size = 2mm

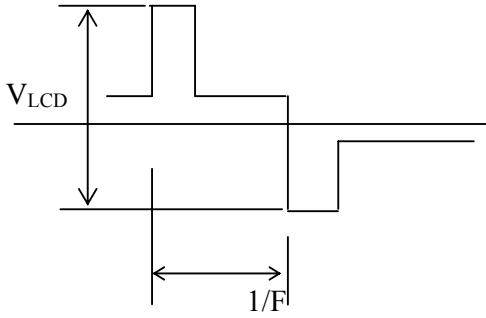

NO	CHARACTERISTICS	DEFINITIONS
7.1.1	Definition of Operating Voltage (V_{LCD})	 V_{LCD} : Operating Voltage F : Frame Frequency

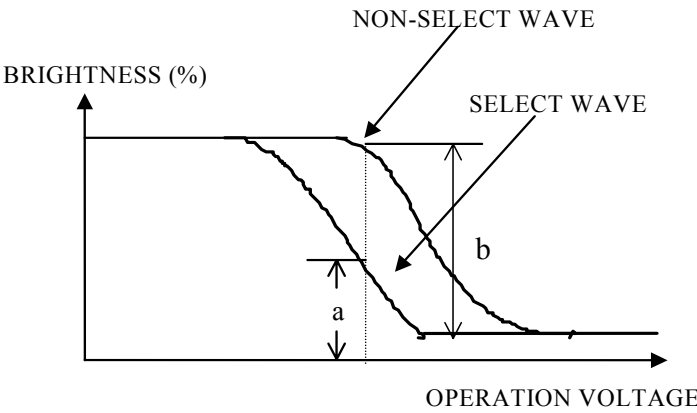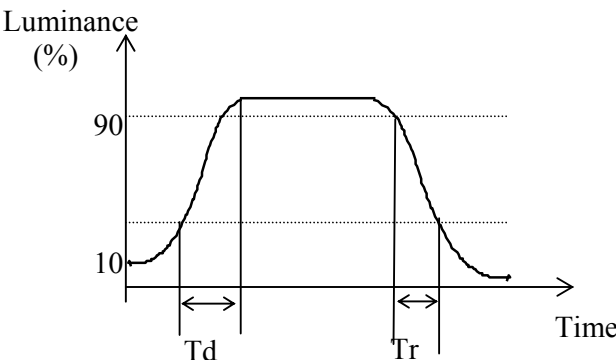

7.1.3	Definition of Contrast Ratio	 Contrast Ratio = $\frac{\text{Brightness of non-selected state (b)}}{\text{Brightness of selected state (a)}}$ Conditions (a) Operating Voltage: V_{LCD} (b) Temperature: 25°C (c) Viewing Angle, $\theta = 0^\circ$
7.1.4	Response Time	 Tr: Measured between 10% and 90% of LCD segment maximum response with V_{ON}. Td: With voltage switches to zero and the instant LCD segment reaches 10% of its maximum response.



8.0 Interface

8.1	Controller	SBN1661 OR EQUIVALENT	
8.2	Display Driver	SBN1661 OR EQUIVALENT	
8.3	Duty Cycle	1/64	
8.4	Pin-out Assignments		
	Pin No	Symbol	Description
	1	V _{SS}	Ground terminal of module
	2	V _{DD}	Supply terminal of module
	3	NC	No connection
	4	A0	Select display data / instruction
	5	E1	Enable IC U1
	6	E2	Enable IC U2
	7	V _{EE} *	Negative voltage for VLCD
	8	NC	No connection
	9	R/W	Read / Write selection
	10 to 17	D0 to D7	Data Bus Line
	18	RES	Reset
	19	SLA	Backlight power supply
	20	SLK	Backlight ground


Note:

- V_{EE} *:**
1. If J1 in use, V_{DD} = 5V, V_{SS} = 0V (GND), V_{EE} = NC.
 2. If J2 in use, V_{DD} = 2.4 ~ 5.0V, V_{EE} = -2.6 ~ 0V.
 3. J1 and J2 are jumpers on the board.
 4. Module, by default, will have J1 in use.
 5. For J2 to be use, ordering codes must check with factory or sales rep nearest to you.



9.0 Functional Descriptions

9.1 Display Control Timing Waveform and Characteristics

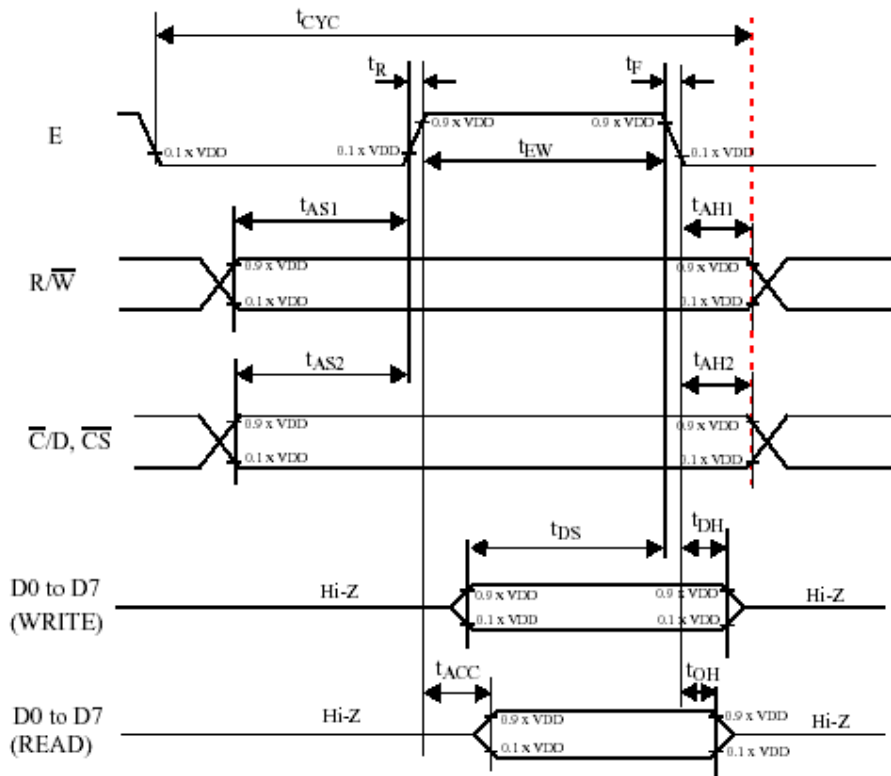


$V_{DD} = 5V \pm 10\%$; $V_{SS} = 0V$; $T_{amb} = -20^\circ C$ to $+75^\circ C$.

symbol	parameter	min.	max.	test conditons	unit
t_{AS1}	Address set-up time with respect to R/W	20			ns
t_{AS2}	Address set-up time with respect to C/D, CS	20			ns
t_{AH1}	Address hold time with respect to R/W	10			ns
t_{AH2}	Address hold time respect with to C/D, CS	10			ns
t_F, t_R	Enable (E) pulse falling/rising time		15		ns
t_{CYC}	System cycle time	1000		Note 1	ns
t_{EWR}	Enable pulse width for READ	100			ns
t_{EWW}	Enable pulse width for WRITE	80			ns
t_{DS}	Data setup time	80			ns
t_{DH}	Data hold time	10			ns
t_{ACC}	Data access time		90	CL= 100 pF.	ns
t_{OH}	Data output hold time	10	60	Refer to Fig. 23.	ns


Timing Interface with 6800 series MPU




11. Block Diagram and Power Supply

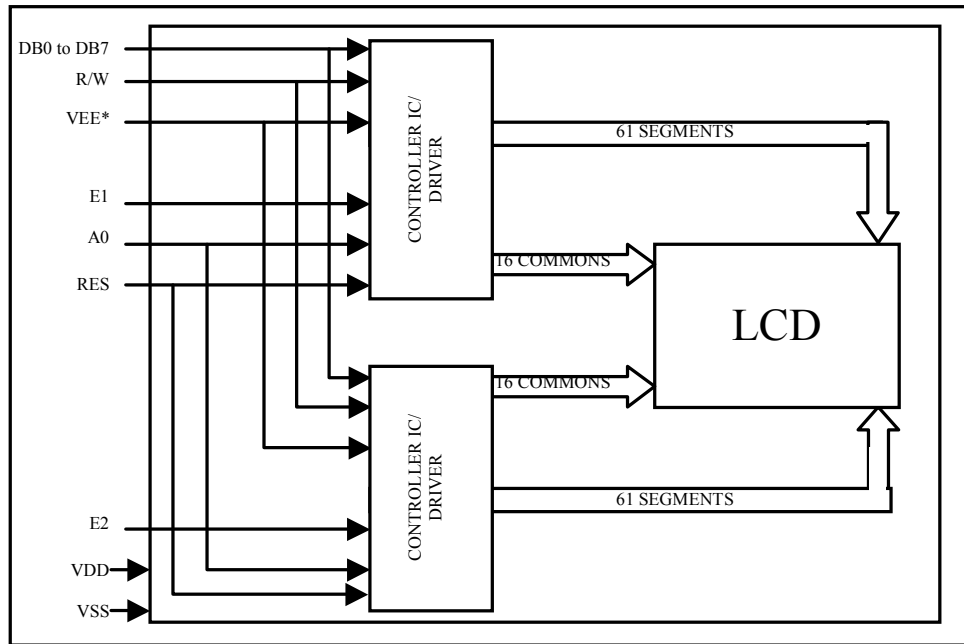


Block Diagram

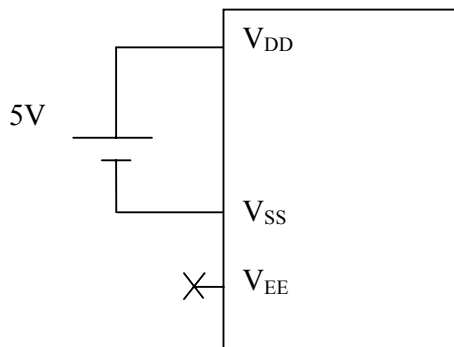

If J1 in use

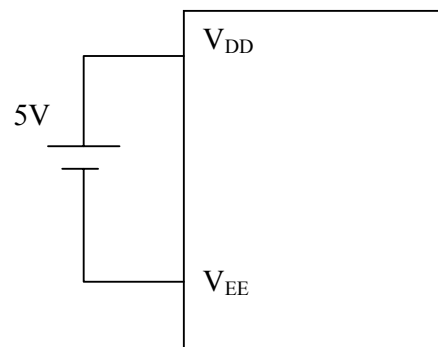

If J2 in use




Power Supply





12.0 Quality Assurance

12.1 ZONE DEFINITION

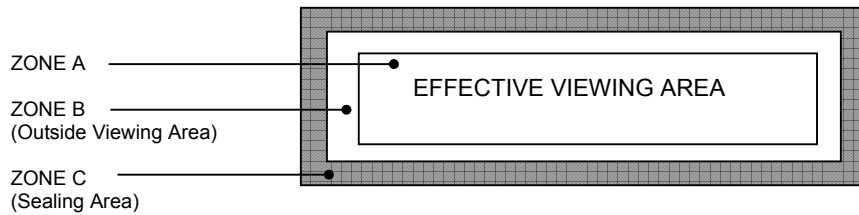

12.1.1 Black Spot, White Spot and Foreign Material

Defect Category	Defect Description	Criterion				Drawing Specification	
Black Spot, White Spot and Foreign Material	Black Spot, White Spot and Foreign Material	Zone / Dimension		Acceptable No.			 D = (A + B)/2
				A	B	C	
		D ≤ 0.10mm		NC	NC	NC	
		0.10<D ≤ 0.20mm		3	3	NC	
		0.20 < D ≤ 0.30mm		1	2	NC	
		D > 0.30 mm		0	0	NC	
		NC: No count					
		D: Mean Diameter of Defect					




12.1.2 Line Shape and Scratches

Defect Category	Defect Description	Criterion				Drawing Specification
Line shape and scratches	Line shape and scratches	Zone /Dimension		Acceptable No.		
		X	Y	A	B	C
		-	$< 0.01\text{mm}$	NC	NC	NC
		$< 2\text{ mm}$	$< 0.02\text{mm}$	1	1	NC
		$< 1\text{ mm}$	$< 0.02\text{mm}$	1	2	NC


12.1.3 Pin Hole

Defect Category	Defect Description	Criterion				Drawing Specification
Pin Hole	Pin hole / void at light up segment	$D \leq 0.20\text{mm}$ within 1 part/segment				





12.1.4 Polarizer Bubble/Foreign Material

Defect Category	Defect Description	Criterion				Drawing Specification
	Polarizer bubble / Foreign material					 D = (A + B)/2
		Zone / Dimension	Acceptable No.			
			A	B	C	
		D ≤ 0.15mm	NC	NC	NC	
		0.15 < D ≤ 0.30mm	3	5	NC	
		0.30 < D ≤ 0.50mm	2	3	NC	
		0.50 < D ≤ 1.0mm	0	1	NC	
NC: No count D: Mean Diameter of Defect Accept - if air bubble at the seal area does not propagate into effective viewing area						

Note: Total defects shall not exceed five



13. Precaution for using LCM

1. Liquid Crystal Display (LCD)

LCD is made up of glass, organic sealant, organic fluid and polymer based polarizers. The following precautions should be taken when handling.

- b) Keep the temperature within the range of use and storage. Excessive temperature and humidity could cause polarization degradation, polarizer peel off or bubble.
- c) Do not contact the exposed polarizer with anything harder than HB pencil lead. To clean dust off the display surface, wipe gently with cotton, chamois or other soft material soaked in petroleum benzin.
- d) Wipe off saliva or water drops immediately. Contact with water over a long period of time may cause polarizer deformation or colour fading, while an active LCD with water condensation on its surface will cause corrosion of ITO electrodes.
- e) Glass can be easily chipped or cracked from rough handling, especially at corners and edges.
- f) Do not drive LCD with DC voltage.

2. Liquid Crystal Display Modules.

2.1 Mechanical Considerations

LCM are assembled and adjusted with a high degree of precision. Avoid excessive shocks and do not make any alterations or modification. The following should be noted.

- a) Do not tamper in any way with the tabs on the metal frame.
- b) Do not modify the PCB by drilling extra holes, changing its outline, moving its component or modifying its pattern.
- c) Do not touch the elastomer connector, especially insert a backlight panel (for example, EL)
- d) When mounting a LCM make sure that the PCB is not under any stress such as bending or twisting. Elastomer contacts are very delicate and missing pixels could result from slight dislocation of any of the elements.

- a) Avoid pressing on the metal bezel, otherwise the elastomer connector could be deformed and lose contact, resulting in missing pixels.

2.2 Static Electricity

LCM contains CMOS LSI's and the same precaution for such devices should apply, namely

- a) The operator should be grounded whenever he/she comes into contact with the module. Never touch any of the conductive parts such as the LSI pads, the copper leads on the PCB and the interface terminals with any parts of the human body.
- b) The modules should be kept in antistatic bags or other containers to static for storage.
- c) Only properly grounded soldering irons should be used.
- d) If an electric screwdriver is used, it should be well grounded and shielded from commutator spark.
- e) The normal static prevention measures should be observed for work clothes and working benches, the latter conductive (rubber) mat is recommended.
- f) Since dry air is inductive to statics, a relative humidity of 50-60% is recommended.

2.3 Soldering

- a) Solder only to the I/O terminals.
- b) Use only soldering irons with proper grounding and no leakage.
- c) Soldering temperature: 280 °C
- d) Soldering time: 3 to 4 sec
- e) Use eutectic solder with resin flux fill.
- f) If flux is used, the LCD surface should be covered to avoid flux spatters. Flux residue should be removed afterwards.



2.4 Operation


- a) The contrast can be adjusted by varying the LCD driving voltage V_0
- b) Driving voltage should be kept within specified range, excess voltage shortens display life.
- c) Response time increases with decrease in temperature.
- d) Display may turn black or dark blue at temperature above its operational range, this is (however not pressing on the viewing area) may cause the segments to appear “fractured”.
- e) Mechanical disturbance during operation (such as pressing on the viewing area) may cause the segments to appear “fractured”.

2.5 Storage

If any fluid leaks out of the damage glass cell, wash off any human part that comes into contact with soap and water. Never swallow the fluid. The toxicity is extremely low but caution should be exercised at all the time.

2.6 Limited Warranty

Unless otherwise agreed between Crystal Clear Technology and customer, Crystal Clear Technology will replace or repair any of its LCD and LCM which is found to be defective electrically and visually when inspected in accordance with Crystal Clear Technology acceptance standards, for a period of one year from date of shipment. Confirmation of such date shall be based on freight documents. The warranty liability of Crystal Clear Technology is limited to repair and/or replacement on the terms set forth above. Crystal Clear Technology will not be responsible for any subsequent or consequential events.

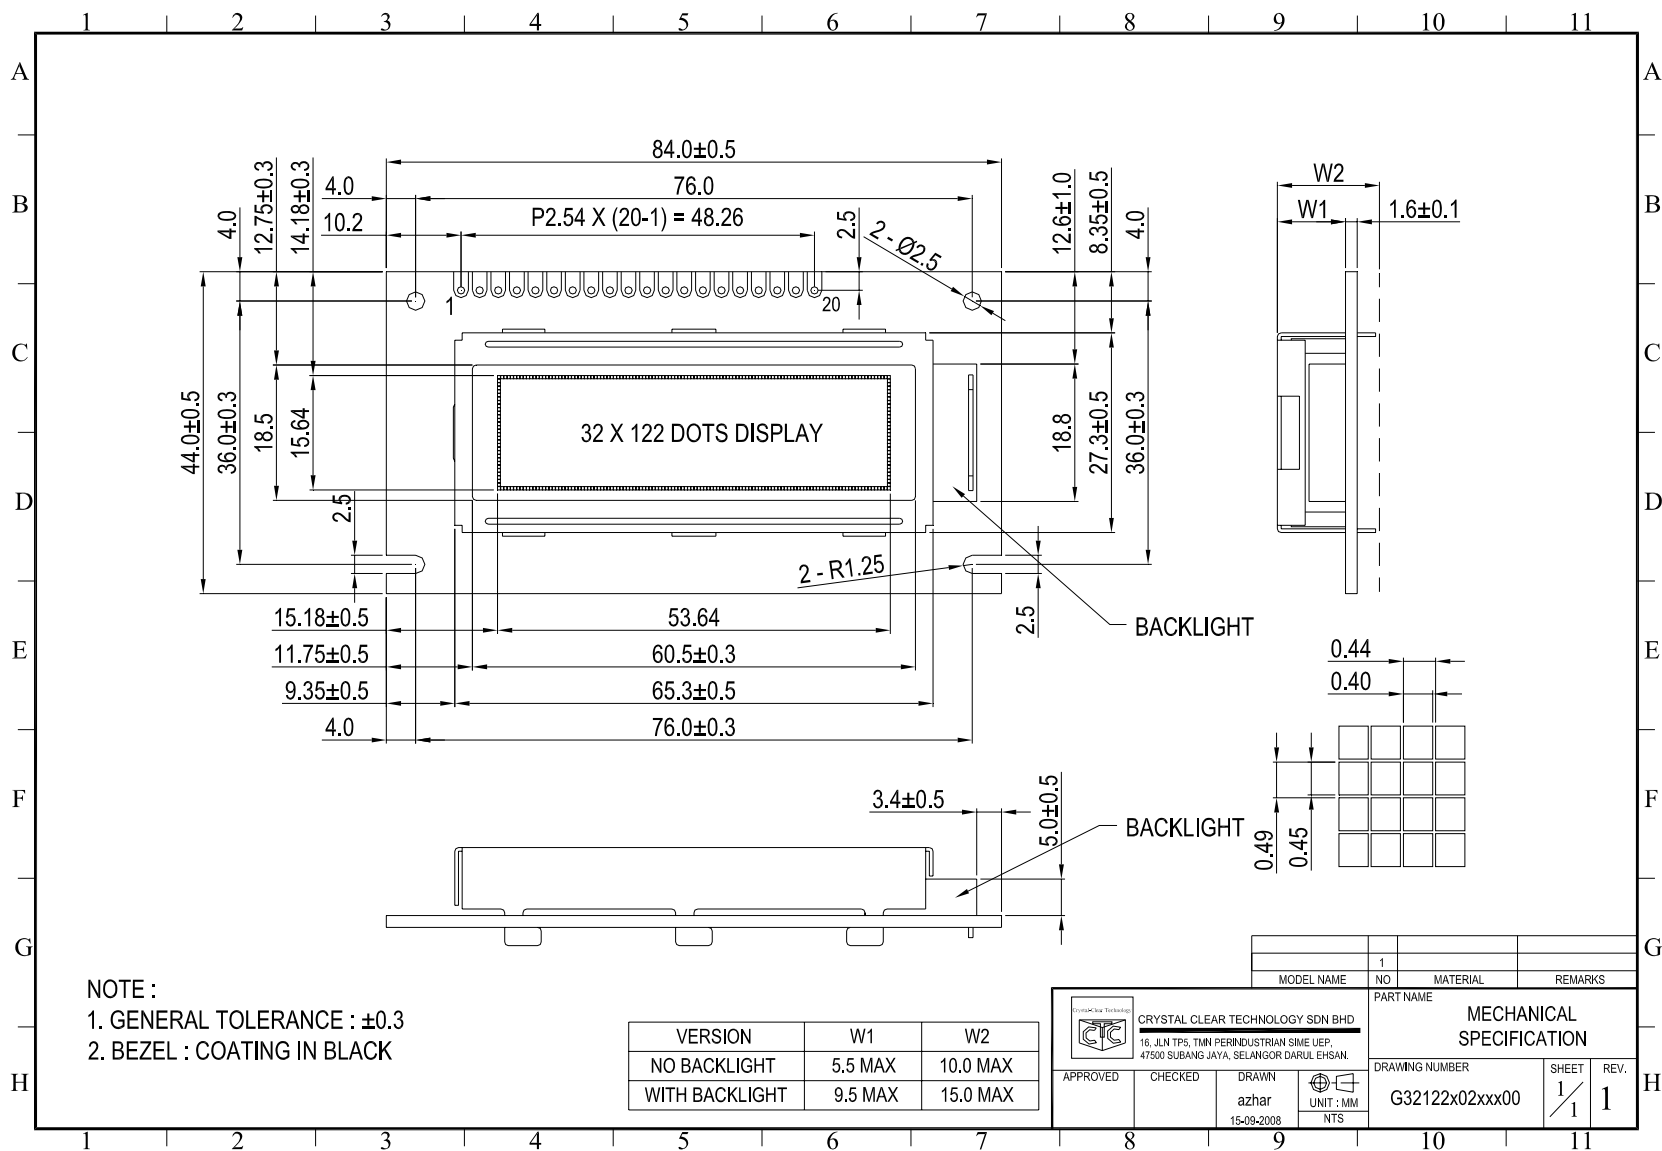



Crystal Clear Technology
16 Jalan TP5—Taman Perindustrian Sime UEP
47600 Subang Jaya—Selangor DE
Malaysia