Honeywell


Honeywell Sensing and Control



Order Product and Get Support

- U.S. Authorized Distributors
- Global Sales & Service
- N. American Sales Reps
- Distributor Inventory
- Technical Assistance
- White Papers
- Literature Request
- Test and Measurement Catalog
- RoHS Product List
- Customer Feedback

64AT21-3D

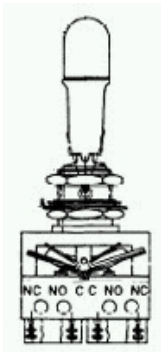

Actual product appearance may vary.

AT Series Toggle Switch, 4 pole, 2 position, Solder T2 type terminal, Locking Lever

My Links

Login to iCOM
Login as Rep/AD
Login as Guest
Login to Digital University

Keyword Search

Search for product and support information.

All Sensing and Contr

Product Search

Part number search:

Use (*) to expand search

Specification Search

Features

Gold or silver contacts
Choice of sealed bushing
Standard or pull to unlock toggle lever
Short behind-panel depth
Solder or quick connect termination
2,4, 6, or 8 SPDT precision basic switches
2 or 3 position, momentary or maintained action

Potential Applications


Industrial machinery and equipment
Military and commercial aviation
Construction equipment
Test instruments
Agricultural machinery
Process control
Medical instrumentation

Description

Compact multipole 2, 4, 6,or 8 SPDT design. MICRO SWITCH™ precision basic switches conserve space and weight. Pull -to-Unlock Toggle Levers prevent accidental operation: the lever must be pulled approximately 2,3 mm [0.09 inches] t change the positions. Many locking configurations are available. Lever to bushing seals. Hermetic basic switches are available. AT qualified versions meet MIL-S-8805/98. Various levers and styles are available.

Supporting Documentation

Accessory: Seals | Accessory: Nuts | Engineering Drawing

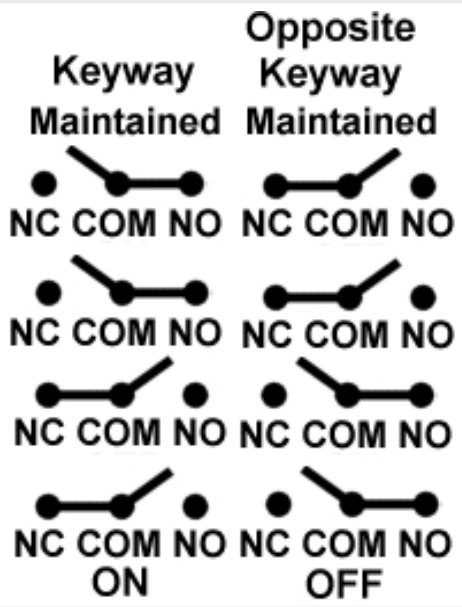Product Specifications	
Circuitry/Operating action	
Product Type	MICRO SWITCH™ Toggle
Ampere/Voltage Range (Resistive Load)	0.1 A to 7.0 A at 0.5 Vdc to 28 Vdc
Circuitry	4PDT
Action	2 position
Mounting	Bushing 15/32 in
Termination	Solder T2 type
Comment	FAA- PMA approved, white cap on lever
Availability	Global
UNSPSC Code	30211908
UNSPSC Commodity	30211908 Toggle switches
Series Name	AT

Downloaded from Arrow.com.