

■ **Features**

- Input voltage: 176-305VAC
- Built-in active PFC function: 0.99 Typ.
- Low THD: 4% Typ.
- High efficiency: 89% Typ.
- High surge immunity
- Support Time-shared dimming function
- Compliance to worldwide safety regulations for lighting

■ **Specification**

**ME035A070AQ\_CLKS**

Input	Efficiency(220Vac) <sup>Note.1</sup>	89%(Typ.), 87% Min at full load
	Voltage Range (V) <sup>Note.2</sup>	176 ~ 305Vac, OR 248~ 431Vdc
	Voltage Rated (V) <sup>Note.2</sup>	200-240Vac
	Frequency Range (Hz)	47~63
	Power Factor	0.99(Typ.) with full load, at 220Vac
		>0.95, 80%~100% load, at 220Vac
	THD	4%(Typ.) with full load, <15%, 80%~100% load, at 220Vac
	AC Current(Max)	0.25A at 200VAC
	Inrush Current(Max.)	20A at 230Vac input 25℃ Cold Start ( time wide=500uS, measured at 50% Ipeak, Not applicable for the inrush current to Noise Filter for less than 0.2ms)
Output	Leakage Current(Max.)	0.75mA at 240Vac/50Hz
	Output Voltage range (V)	25-50
	Rated Current(mA)	700
	Rated Power (W)	35
	Ripple Current	<35%((PK-AV)/AV), LEDH mode full load at 220Vac
	Current Tolerance	5%
	Line Regulation	3%
	Load Regulation	3%
	Turn on delay Time	<1.5s, at 220Vac
Protection	Over Voltage(V)	<75
	Short Circuit	Protection type: Voltage limiting. output will not exceed the upper limit voltage , recovers automatically after fault condition is removed.
Environment	Operating Temp.	-40~+70℃( Refer to 'Derating Curve' ),
	Tc	90℃
	Operating Humidity	20~95% RH non-condensing
	Storage Temp., Humidity	-40~+85℃ , 10~95%RH
	Temp. Coefficient	0.03%/℃ ( 0~50℃ )
	Vibration	10-500Hz, 5G 12min/cycle , period for 72min each along X、Y、 Z axes
Safety & EMC	Safety Standard	EN61347-1, EN61347-2-13
	Withstand Voltage	I/P-O/P: 3.75KVac, I/P-FG: 1.875KV, O/P-FG: 1.5KV
	Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms/500Vdc/25℃/70%RH
	EMC Emission	EN55015, EN61000-3-2 Class C, EN61000-3-3
	EMC Immunity	IEC61000-4-2, 3, 4, 5, 6, 8, 11, IEC61547, ( Surge: L-N 6KV, L/N-Earth 6KV )
Others	MTBF	300,000 Hours, measured at full load, 25℃ ambient temperature
	Lifetime	50,000 Hours at Tc 75℃ (Refer to "Life Time VS. Tcase (Ref.)")
	Dimension	165 x 42.5 x 34.5 (mm) ( LxWxH )
	Weight(Typ.)	0.44KG

Note.1: Measured at full load and steady-state temperature in 25℃ ambient; Note. 2: Derating may be needed under low input voltages , Please Refer to 'Derating Curve' ; Note. 3: All parameters NOT specially mentioned are measured at 220VAC input , rated load and 25℃ ambient temperature ;



subject to change without notice

Page 3 of 8


**SHANGHAI MOONS' AUTOMATION CONTROL CO., LTD.**

Add: No.168, Mingjia Road, Shanghai 201107, P.R.China  
Tel: +86 (0)21 52634688 Website: www.moons.com.cn


Derating Curve

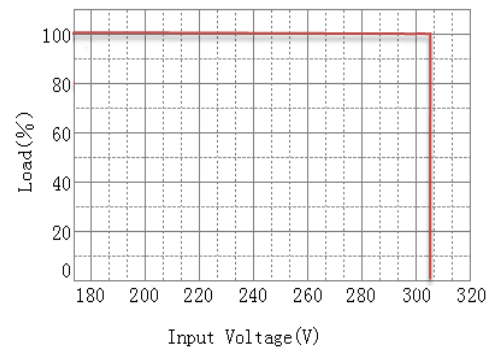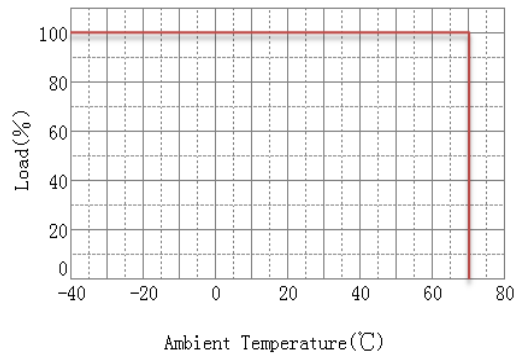


Power Factor VS. Load Curve

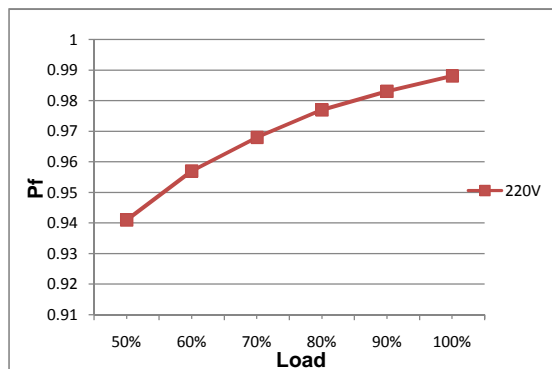


Efficiency VS. Load Curve

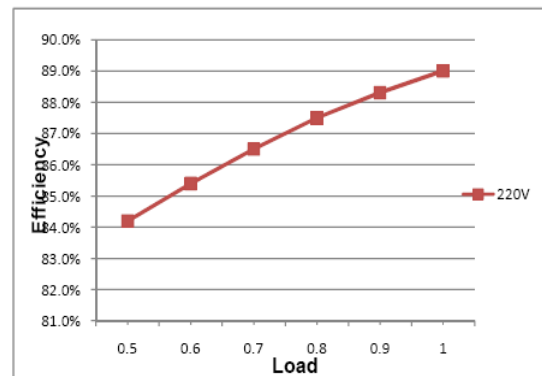

THD Curve

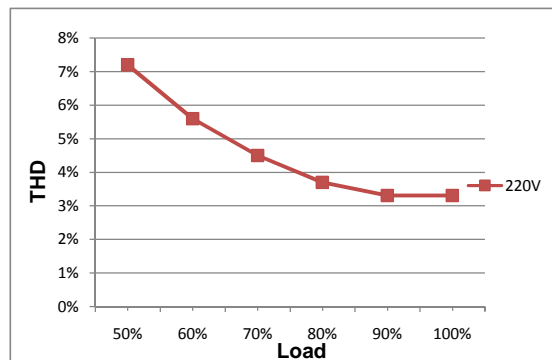


Life Time VS. Tcase (Ref.)

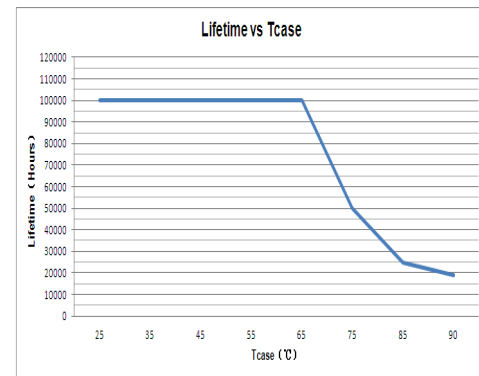

## ■ Instruction

### 1.Field Programmable Topology

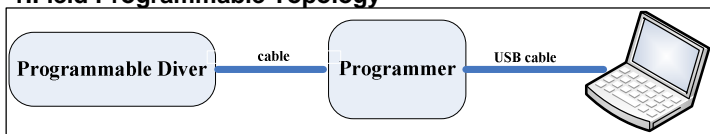

The programmable driver can be programmed by using special PC software and the programmer module.

### 2.Dimming Interface Description

Pin description

Pin	Name	Value	Description	Wire Color
1	Vaux 12V	9V-13.2V	Passive dimmers power supply	BK/WH
2	Dim+/Program	0-10V	Dimming/Programming input	PURPLE
3	Dim-	0V	DC Ground	GRAY

### 3.Dimming Software Function Instruction

#### ■ Adjustable Output Current(AOC)

Adjustable Output Current(AOC)

Module Current  mA

Max Current  mA Power  W

Users can set the rated current between 10%\*Max Current and 100%\*Max Current

#### ■ PWM

Input a PWM signal from the 2nd pin(Dim+/Program) of the dimming interface to change the output current. User can set "Positive Logic" or "Negative Logic" of the PWM signal. PWM duty cycle: 1%~99%(it has both positive and negative logics ), frequency: 500Hz~5kHz, 3V~10V is high, 0.3V~0.8V is low.

#### ■ Adjustable Startup Time(AST)

Adjustable Startup Time(AST)

Start Fadeup Time  s

Set driver's "Start Fade up Time". It means how much time the driver costs to achieve the "Module Current" that the user set. The valid value is 0s, 1s, 2s, 5s, 10s, 20s, 40s.

Dimming Interface Selection(DIS)

☐ 1-10V ☒ PWM ☐ Smart Midnight ClockDIM ☐ Fixed ClockDIM ☐ No Dimming

PWM Logic(PVML)


Positive Or Negative Logic

#### ■ Fade Time(FT)

Fade Time(FT)


Fadeup Time  s

Set driver's "Fade up Time". This function is available in the Smart Midnight ClockDIM and Fixed ClockDIM mode; It means how much time the driver costs to achieve another dimming level from previous dimming level. The valid value is 0s, 1s, 2s, 5s, 10s, 20s, 40s.

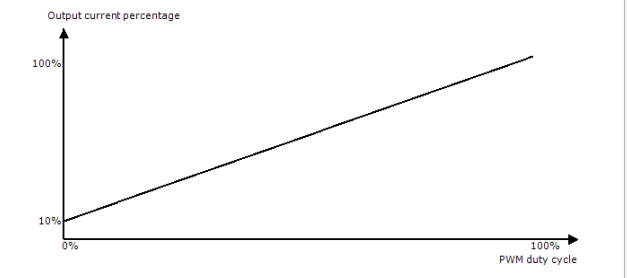


#### ■ 1-10V

Allow users to set the max and min output current and corresponding output voltage to clarify the 1-10V dimming curve. Input a 0~10V signal from 2nd pin of the dimming interface. Default: input ≤1V, output current 10%; input ≥8.5V, output current 100%.

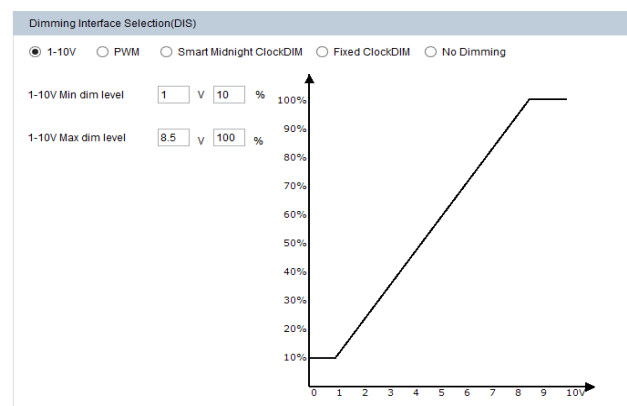


## ■ Instruction

### ■ Integrated Dynadimmer

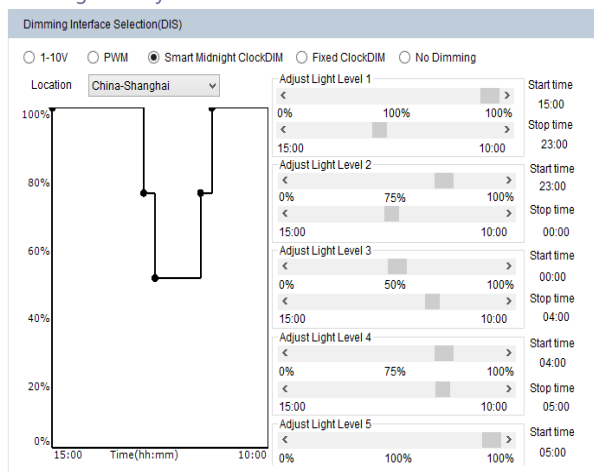


Integrated Dynadimmer allows dimming to predefined light levels based on the nightly operating time. With flexibility in setting time and light levels, the user can configure the driver for specific locations and application needs. Using Integrated Dynadimmer, it is possible to set up to 5 dim levels and time intervals. The driver does not have a real time clock. Instead it runs a virtual clock, determined by the length of nightly operating hours. After 3 ON-OFF cycles, the driver will calculate the virtual clock time. A valid ON-time is defined as a period during which the driver operates continuously for  $\geq 4$  hours to  $\leq 24$  hours. For example, if the requirement in summer is: 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75% (other time 100% or Off). The driver should be powered on for 7h, so it can calculate the virtual clock time as 22:00. Then we can set the dimming plan: 22:00-23:00: 100%, 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75%. From summer to winter, the valid ON-time changes day by day. The driver should be powered on for 17h in winter, and it also can calculate the virtual clock time as 17:00. Then the dimming plan is 17:00-23:00: 100%, 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75%, 05:00-10:00: 100%. From the above, if we set the dimming plan as shown in the picture, after repeating the driver ON-time for 3 consecutive days, the dimming plan takes effect from the 4th day onwards. Each day the driver powered on, it has a different start time according to the virtual clock time. So the driver can satisfy different requirements for different seasons.

### ■ Integrated Dynadimmer Time Based

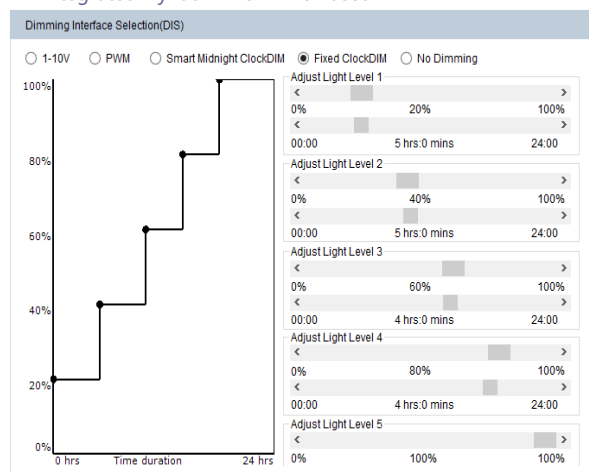


Allow users to separate 24hrs into 5 sections and corresponding output current.

### ■ No Dimming




The driver will be in constant output mode.

### ■ Set MODULE Working hrs(SMW)



User can check how much time the driver works through this function.

### ■ Constant Light Output(CLO)

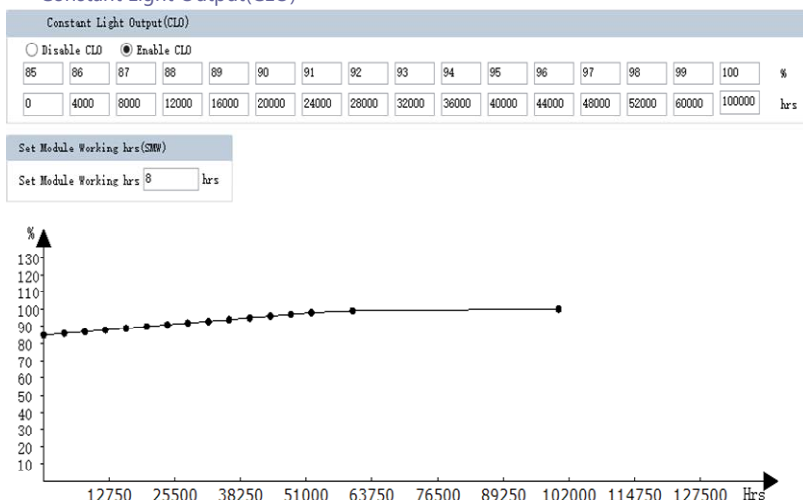

Traditional light sources suffer from depreciation in light output over time. This applies to LED light sources as well. The CLO feature enables LED solutions to deliver constant lumen output through the life of the light engine. Based on the type of LEDs used, heat sinking and driver current, it is possible to estimate the depreciation of light output for specific LEDs and this information can be entered into the driver. The driver counts the number of light source working hours and will increase output current based on this input to enable CLO. When the CLO feature is enabled, the driver nominal output current will be defined by the CLO percentage as shown by the equation below:  

$$\text{Driver target nominal output current} = \text{CLO percentage} \times \text{AOC}$$
For example, in the CLO profile shown in Figure, between 52,000-60,000 working hours, the CLO percentage is set at 98%. Assuming the nominal AOC is set to 500mA, the driver output current with CLO enabled will be  $0.98 \times 500 = 490$  mA.  
The CLO percentage can be set to a value between 85%-100%, in increments of 1%. The LED module working hours can be set at any value between (0-100,000 hours).

## ■ Programmable Plan

### ■ Adjustable Output Current(AOC)

Adjustable Output Current(AOC)			
Module Current	<input type="text" value="700"/>	mA	
Max Current	<input type="text" value="700"/>	mA	Power <input type="text" value="35"/> W


### ■ Dimming

Dimming Interface Selection (DIS)					
<input checked="" type="radio"/> 1-10V	<input type="radio"/> PWM	<input type="radio"/> Integrated Dynadimmer	<input type="radio"/> Integrated Dynadimmer Time Based	<input type="radio"/> No Dimming	

Factory default settings: 0-10V dimming

## Mechanical Specification

Dimensions (Unit: mm)

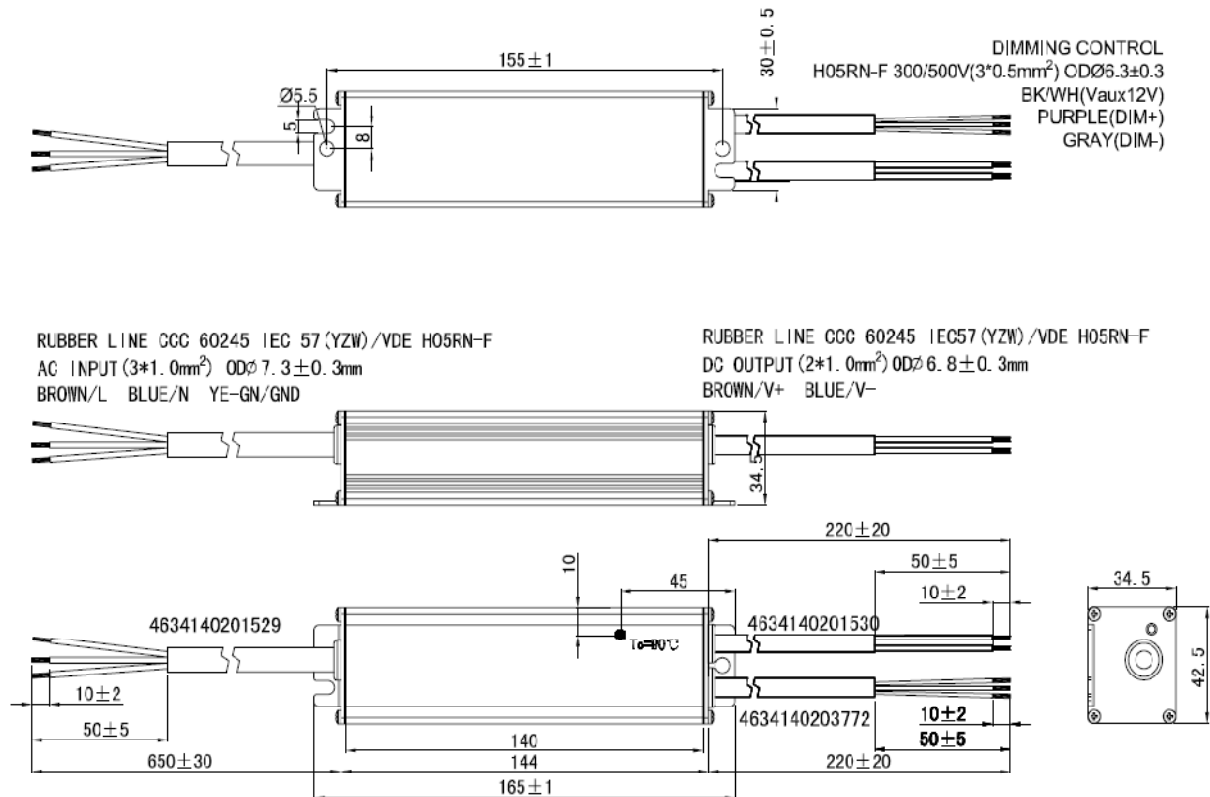

## Nameplate

<p>AC/L ● BROWN (棕色)</p> <p>AC/N ● BLUE (蓝色)</p> <p>● YE-GN (黄绿色)</p> <p>INPUT (输入)</p>	<p><b>MOONS'</b></p> <p>LED Driver (LED控制装置) Energy Saving Solutions</p> <p>Http://www.moons.com.cn Http://www.moonsindustries.com</p>	<p>ME035A070AQ_CLKS</p> <p>P/N:</p> <p>Input Voltage (输入电压): 200-240Vac 50/60Hz</p> <p>Input Current (输入电流): 0.25A@200Vac</p> <p>Output Voltage (输出电压): 25-50Vdc</p> <p>U-OUT (最大输出电压): 60V</p> <p>Output Current (输出电流): 700mA</p> <p>Output Power (输出功率): 35W</p> <p>ta: 70°C tc: 90°C</p> <p>SHANGHAI MOONS' AUTOMATION CONTROL CO., LTD (上海明志自动设备有限公司) MADE IN CHINA (中国制造)</p> <p>IP67 RoHS SELV</p>	<p>V- ● BLUE (蓝色)</p> <p>V+ ● BROWN (棕色)</p> <p>Vaux 12V BK/WH (黑白)</p> <p>Dim+ Program PU (紫色)</p> <p>Dim- GR (灰色)</p> <p>OUTPUT (输出)</p> <p>Dimming (调光)</p>
---	--	---	--

RoHS Compliance:

Our products comply with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.