
OMRON

Thumbwheel Switch

A7PS/A7PH



Dust-tight, Easy-to-Use, Push-operated Switches with Large Display Characters

- Simple push mechanism and large, easy-to-view numeric display make setting easy.
- Dust penetration prevented with seal for the display windows.

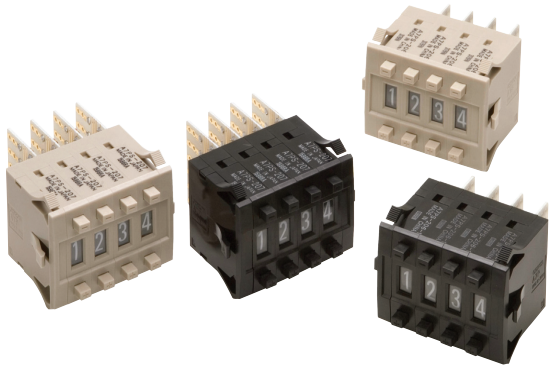

Ordering Information

Switches (Single Switch Units)

Model	A7PS		A7PH	
Classification (See note 1.)	Snap-in (front mounting) 		Snap-in (front mounting)  Long-life type	
Character height	Decimal: 6.8 mm Hexadecimal: 4.0 mm			
Terminals	Solder terminals			
Color	Light gray	Black	Light gray	Black
Output code number	Model			
03 (decimal code)	A7PS-203	A7PS-203-1	A7PH-203	A7PH-203-1
06 (binary coded decimal)	A7PS-206	A7PS-206-1	A7PH-206	A7PH-206-1
07 (binary coded decimal, with component-adding provision) *1	A7PS-207	A7PS-207-1	A7PH-207	A7PH-207-1
19 (decimal code, with component-adding provision)	A7PS-219	A7PS-219-1	---	---
54 (binary coded hexadecimal)	A7PS-254	A7PS-254-1	A7PH-254	A7PH-254-1
55 (binary coded hexadecimal, with component adding provision) *1	A7PS-255	A7PS-255-1	---	---

Note: 1. The classification diagrams show 4 Switch Units combined with End Caps to create 4-digit displays.
2. The model numbers given above are for 1 Switch Unit.
3. Models with +, - displays can also be produced. Add "-PM" after the "206" in the model number (e.g., A7PS-206-PM or A7PS-206-PM-1)

*1. Models with diodes are available. Add "-D" to the model number (e.g., A7PS-207-D or A7PS-207-D-1).

Accessories (Order Separately)

Use accessories, such as End Caps and Spacers, with the Switch Units.

Accessory	Color	Light gray	Black
End Caps		A7P-M	A7P-M-1
Spacer		A7P-P□ (See note.)	A7P-P□-1 (See note.)
Connectors	Solder terminals	NRT-C	
		NRT-CN	
	PCB terminals	NRT-CP	

Note: The □ in the Spacer model number stands for a letter in the range A to U. (Refer to the table in the following explanation about Spacers.)

End Caps

End Caps are used on the Switch Units at each end and allow all the Switch Units to be securely mounted to a panel. They come in pairs, one for the left and one for the right.

Spacers

- Spacers are used for creating extra space or gaps between the Switch Units and have the same dimensions as the Switch Units themselves.
- There are also Spacers with engraved characters or symbols that can be used for indicating units, such as time and length. (Refer to the following table.) Consult your OMRON representative for details.

Symbol	A	B	C	D	E	F	G
Stamp	No designation	SEC	MIN	H	g	kg	mm
Symbol	**H**	**J**	**K**	**L**	**Q**	**T**	**U**
Stamp	cm	m	°C	PCS	x 10 SEC	0	•

Downloaded from Arrow.com.

A7PS/A7PH

Specifications


Item		Model	A7PS	A7PH
Switching capacity (resistive load)			50 VAC or 3.3 to 28 VDC 1 mA to 0.1 A	125 VAC or 3.3 to 28 VDC 10 μA to 0.15 A
Continuous carry current			1 A max.	3 A max.
Contact resistance			300 mΩ max.	
Insulation resistance	Between non-connected terminals		10 MΩ min. (at 500 VDC)	100 MΩ min. (at 500 VDC)
	Between terminal and non-current carrying part		1,000 MΩ min. (at 500 VDC)	
Dielectric strength	Between non-connected terminals		600 VAC, 50/60 Hz for 1 min	
	Between terminal and non-current carrying part		1,000 VAC, 50/60 Hz for 1 min	
Vibration resistance			10 to 55 Hz, 1.5-mm double amplitude for 2 hours min.	
Shock resistance			490 m/s^2 min.	
Durability	Mechanical		100,000 operations min.	2,000,000 operations min.
	Electrical		50,000 operations min.	1,000,000 operations min.
Ambient temperature			Operating: -10°C to 65°C	
Ambient humidity			Operating: 45% to 85%	
Max. operating force			6.37 N max.	


Dimensions

(Unit: mm)

Switches

A7PS-2□□(-1)
A7PH-2□□(-1)
Solder Terminal



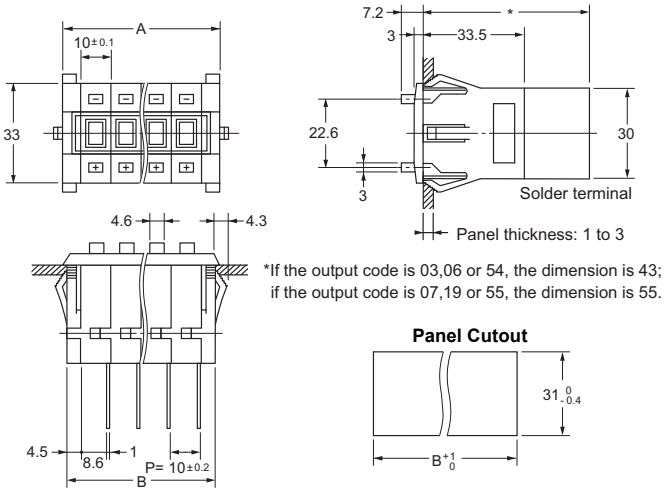

*If the output code is 03,06 or 54, the dimension is 43; if the output code is 07,19 or 55, the dimension is 55.


Panel Cutout

Number of Switches (n)	Size A (n x 10 + 12)	Size B (n x 10 + 9)
1	22	19
2	32	29
3	42	39
4	52	49
5	62	59
6	72	69
7	82	79
8	92	89
9	102	99
10	112	109


Note: 1. The dimensions above include both End Caps, and will increase 10 mm for each Spacer inserted.
2. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions. The tolerance for multiple connection is ±(number of units x 0.4) mm.

Accessories (Order Separately)

End Caps for Push-operated Switches
A7P-M(-1) Snap-in Panel Mounting

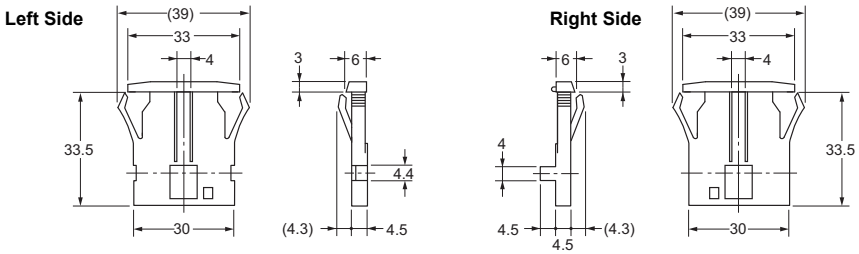

Spacers for Push-operated Switches
A7P-P□(-1) Snap-in Panel Mounting

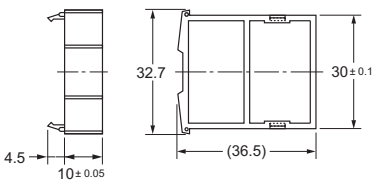

The □ in the Spacer model number stands for a letter in the range A to U. (Refer to the table under the explanation about Spacers on page 1.)


Note: Unless otherwise indicated, dimensional tolerances for dimensions in the models above are ± 0.4 mm.

OMRON
Downloaded from Arrow.com.


Connectors

(These devices allow Switches to be quickly removed for maintenance and inspection of connectivity, and quickly re-installed.)


NRT-C Solder Terminals

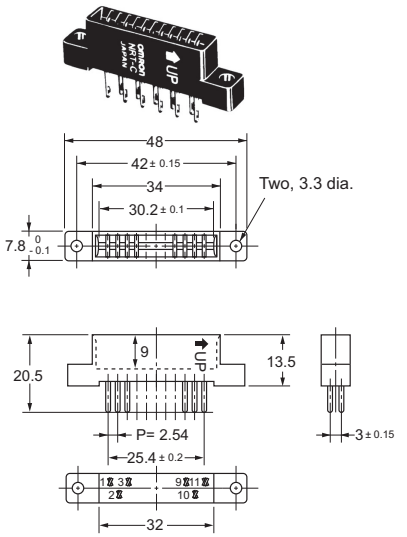

NRT-CN Solder Terminals

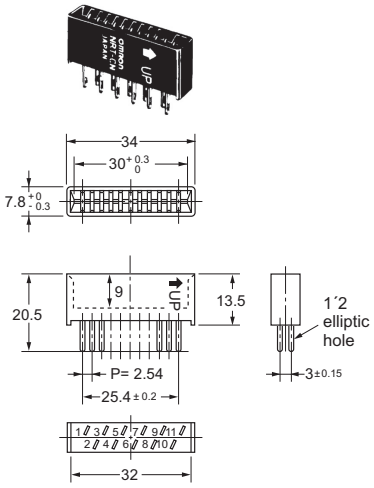


NRT-CP PCB Terminals

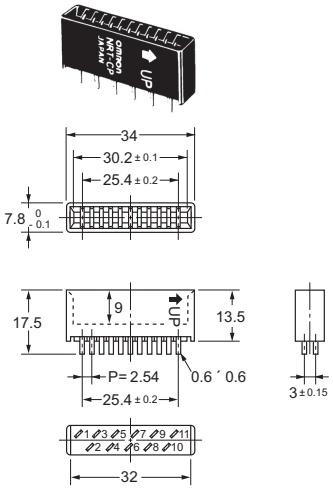

Note: Unless otherwise indicated, dimensional tolerances for dimensions in the models above are ± 0.4 mm.





Inserting Connectors

Insert Connectors with the “UP” arrow pointing up.

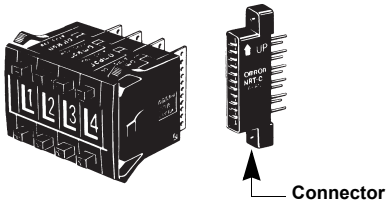

Output Codes/Terminals

- Switches with output codes 06 or 07 both use binary coded decimal but Switches with output code 07 have a component-adding provision. Similarly, Switches with output codes 54 or 55 both use binary coded hexadecimal but Switches with output code 55 have a component-adding provision.
- How to Read Output Codes
  For example, when the dial position is “3,” the common terminal C on the Switch is connected to terminals 1 and 2. When the Switch is inserted into the Connector, the common terminal C becomes connector terminal 3, and terminals 1 and 2 become connector terminals 5 and 7 respectively.

Output code number	Terminals	Output codes
03		See table below
19		See table below
06		See table below
07		See table below

Component-adding provision

Component-adding provision



Model	Switch Unit or Connector	Common terminal number	Terminals connected to common									
	Switch Unit	C	0	1	2	3	4	5	6	7	8	9
03,19	Connector	6	1	2	3	4	5	7	8	9	10	11
Dial	0		●									
	1			●								
	2				●							
	3					●						
	4						●					
	5							●				
	6								●			
	7									●		
	8										●	
	9											●

Note: The solid dot ● indicates that the internal switch is ON (i.e., connected to the common terminal).

Model	Switch Unit or Connector	Common terminal number	Terminals connected to common			
	Switch Unit	C	1	2	4	8
06	Connector	3	5	7	9	11
07	Connector	1				
Dial	0					
	1		●			
	2			●		
	3		●	●		
	4				●	
	5		●		●	
	6			●	●	
	7		●	●	●	
	8					●
	9		●			●

Note: The solid dot ● indicates that the internal switch is ON (i.e., connected to the common terminal).

Downloaded from Arrow.com.


Output code number	Terminals	Output codes
54		
55	 Component-adding provision	

Model	Switch Unit or Connector	Common terminal number	Terminals connected to common			
	Switch Unit	C	1	2	4	8
54	Connector	3	5	7	9	11
55	Connector	1				
Dial	0					
	1		●			
	2			●		
	3		●	●		
	4				●	
	5		●		●	
	6			●	●	
	7		●	●	●	
	8					●
	9		●			●
	A			●		●
	B		●	●		●
	C				●	●
	D		●		●	●
	E			●	●	●
	F		●	●	●	●

Note: 1. The solid dot ● indicates that the internal switch is ON (i.e., connected to the common terminal).

Ordering Procedure

Place orders as shown in the example below, specifying the model and number.

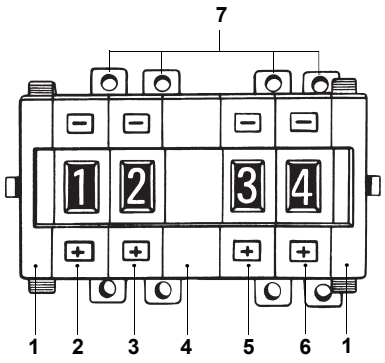

1. A7P-M (End Caps): 1 set
2. A7PS-203 (Switch Unit): 1 piece
3. A7PS-206 (Switch Unit): 1 piece
4. A7P-PA (Spacer): 1 piece
5. A7PS-207 (Switch Unit): 1 piece
6. A7PS-219 (Switch Unit): 1 piece

Note: Standard products are not factory-assembled for shipment. Contact your OMRON representative for details on ordering factory-assembled sets.

7. NRT-C (Connector): 4 pieces


Safety Precautions

Refer to *Precautions for Correct Use* on in the *Technical Guide for Thumbwheel Switches*.

Precautions for Correct Use

Handling

- The molded components of the Switch use polyacetal resin and ABS resin. It is recommended that alcohol is used to wipe off dirt and smudges from the molded components. Take care to prevent the alcohol from getting inside.
- A7P Thumbwheel Switches are dust-proof, but they are not drip-proof. Do not use them in areas subject to water or oil exposure.
- Do not allow solder flux or alcohol to enter the Switch.
- Do not push the (+) and (-) operating push-buttons at the same time.
- To separate the Switches, use a flat-blade screwdriver as shown in the following figure to release the hooks on the top and bottom and then separate the Switches. Be careful not to bend the hooks.

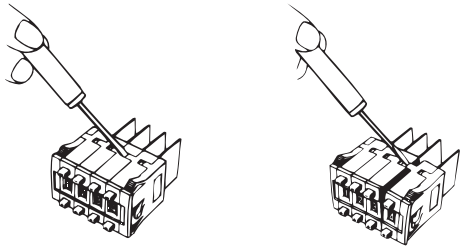

OMRON
Downloaded from Arrow.com.

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Device & Module Solutions Company

Regional Contact

Americas
https://components.omron.com/us

Europe
https://components.omron.com/eu

Asia-Pacific
https://components.omron.com/ap

China
https://components.omron.com.cn

Korea
https://components.omron.com/kr

Japan
https://components.omron.com/jp

© OMRON Corporation 2026 All Rights Reserved.
In the interest of product improvement, specifications are subject to change without notice.

Cat. No. B163-E1-01
0826 (0826)

Downloaded from Arrow.com.