



Fluxgate system / Voltage-output type, Anti-Surge current, Compact


F01P S05L, F02P S05L, F03P S05L SERIES



F01PxxxS05L



F02PxxxS05L



F03PxxxS05L



RoHS

- Backward compatible to F01PxxxS05, F02PxxxS05, F03PxxxS05 Series.
- Anti-Surge current (4kAT, 8/20uS, single)
- Mounting area reduced, however, pin compatibility. Longitudinal dimension reduced.
- Super precision & High stability (Low temperature drift) .
- Unipolar power voltage; +5V. Rated Current; 6 ~ 50A. Multi-range models. MAX_Temp.105°C . Voltage-output type.
- F01PxxxS05L series are designed by the pin compatibility as high-end models of S22PxxxS05M2 series.

Comparison of the main features

Series	Features
F01PxxxS05L	Without reference access.
F02PxxxS05L	With reference access, Ref_in / Ref_out.
F03PxxxS05L	With reference access, Ref_in / Ref_out. Higher creepage and clearance distances.


***: Rated Current symbol

SPECIFICATIONS

Spec	Types	Value		
		F01PxxxS05L	F02PxxxS05L	F03PxxxS05L
Maximum peak current		4kAT (2kA × 2. Number of primary turns is two turns.)		
Rated Current If (xxx: Rated Current symbol)		6A (006) / 15A (015) / 25A (025) / 50A (050)		
Maximum current (At Vcc=+5V, Ta=+105°C)		± 20A (If=6A) / ± 51A (If=15A) / ± 85A (If=25A) / ± 150A (If=50A)		
Existence of reference access		No	Yes	
Number of primary busbar		3pcs		4pcs
Clearance distance, Primary ↔ Secondary		7.7mm	7.5mm	8.2mm
STANDARDS		UL508 (file No. E243511), EN50178, EN61010-1, EN60950-1		
Ambient operating temperature		− 40°C ~ +105°C		

Mounting area

The mounting area has been reduced more than the F01P / F02P / F03PxxxS05 series. However, the F01P / F02P / F03PxxxS05L series series are 100% compatible with the F01P / F02P / F03PxxxS05series in regards to the footprint mounting.

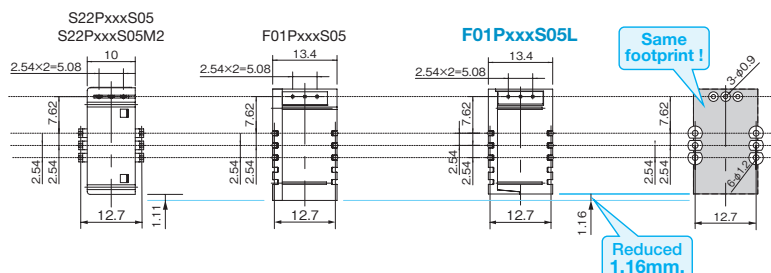


The F02P/F03PxxxS05L series also similarly reduces the mounting area.

The above-mentioned comparison tables are the auxiliary data for understanding each series. For details, please confirm the next page or subsequent ones. >>>

Fluxgate system / Voltage-output type Anti-Surge current, Compact size

F02P L SERIES



RoHS

ABSOLUTE MAXIMUM RATINGS

Parameters	Symbol	Unit	Value	Comment
Supply voltage	V _{CC}	V	7	
Primary conductor temperature	—	°C	110	
ESD (HBM: Human Body Model)	—	kV	4	C=100pF, R=1.5k Ω
Maximum peak current	—	kAT	4	Current waveform : • Front time 8μs • Time to half value 20μs • single

ISOLATION CHARACTERISTICS

Parameters	Symbol	Unit	Value	Comment
Insulation voltage	V _d	—	AC4100V, for 1minute (Sensing current 0.5mA)	Primary ⇔ Secondary
Insulation Resistance	R _{IS}	—	≥ 500M Ω (at DC500V)	Primary ⇔ Secondary
Clearance distance	d _{ci}	—	7.5mm	Primary ⇔ Secondary
Creepage distance	d _{cp}	—	7.5mm	Primary ⇔ Secondary
Case material	—	—	UL94 V-0	
Comparative Tracking Index: (CTI)	CTI	V	600	
Application example	—	—	300V, CAT III, PD2	Reinforced isolation, non uniform field according to EN62477-1:2012 and EN62477-1:2012/A11:2014, EN61010
	—	—	600V, CAT III, PD2	Basic isolation, non uniform field according to EN62477-1:2012 and EN62477-1:2012/A11:2014, EN61010

ENVIRONMENTAL AND MECHANICAL CHARACTERISTICS

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Ambient operating temperature	T _A	°C	− 40		+ 105	
Ambient storage temperature	T _S	°C	− 40		+ 105	
Mass	m	g		12		

SPECIFICATIONS
 $T_A = +25^{\circ}\text{C}$, $N_p = 1\text{T}$, $R_L = 10\text{k}\Omega$, $V_{CC} = +5\text{V}$

Parameters		Symbol	Unit	Value			Comment
				MIN	TYP	MAX	
Primary nominal current	F02P006S05L	I_{PN}	A		6		
	F02P015S05L				15		
	F02P025S05L				25		
	F02P050S05L				50		
Primary current, measuring range	F02P006S05L	I_{PM}	A	− 20		20	
	F02P015S05L			− 51		51	
	F02P025S05L			− 85		85	
	F02P050S05L			− 150		150	
Supply Voltage		V_{CC}	V	4.75	5.00	5.25	
Number of primary turns		N_p	T	1, 2, 3			
Number of secondary turns	F02P006S05L	N_s	T		1816		
	F02P015S05L				1737		
	F02P025S05L				1764		
	F02P050S05L				1600		
Consumption current ((at I_P)	F02P006S05L	I_{CC}	mA		25		$I_{CC} = 15 + I_P \text{ (mA)} / N_s$
	F02P015S05L				30		
	F02P025S05L				35		
	F02P050S05L				55		
Reference voltage (output) (at $I_P = 0\text{A}$)		V_{ref1}	V	2.495	2.500	2.505	Ref OUT mode
Reference voltage (input)		V_{ref2}	V	0		4	Ref IN mode
Output voltage range		V_O	V	0.375		4.625	
Output voltage (at $I_P = 0\text{A}$)		V_O	V		V_{ref1}, V_{ref2}		
Electrical offset voltage * 1	F02P006S05L	V_{oe}	mV	− 5.300		5.300	
	F02P015S05L			− 2.210		2.210	
	F02P025S05L			− 1.350		1.350	
	F02P050S05L			− 0.725		0.725	
Electrical offset current referred to primary * 1	F02P006S05L	I_{oe}	mA	− 51		51	
	F02P015S05L			− 53		53	
	F02P025S05L			− 54		54	
	F02P050S05L			− 58		58	
Temperature coefficient of V_{ref1}		TCV_{ref1}	ppm/K		± 5.0	± 50	
Temperature coefficient of V_O (at $I_P = 0\text{A}$)	F02P006S05L	TCV_O	ppm/K		± 6.0	± 14	ppm/K of 2.5V (− 40°C ~ + 105°C)
	F02P015S05L				± 2.3	± 6	
	F02P025S05L				± 1.4	± 4	
	F02P050S05L				± 0.7	± 3	
Theoretical sensitivity	F02P006S05L	G_{th}	mV/A		104.2		$625\text{mV}/I_{PN}$
	F02P015S05L				41.67		
	F02P025S05L				25		
	F02P050S05L				12.5		
Sensitivity error		ε_G	%	− 0.7		0.7	
Temperature coefficient of Sensitivity (at $T_A = -40^{\circ}\text{C} \sim +105^{\circ}\text{C}$)		TCG	ppm/K			± 40	
Linearity error (at I_P)		ε_L	%	− 0.1		0.1	
Magnetic offset current referred to primary (at $10 \times I_P$)		I_{OM}	A	− 0.1		0.1	

*1 Offset voltage value is after removal of core hysteresis.

SPECIFICATIONS

$T_A=+25^{\circ}\text{C}$, $N_p=1\text{T}$, $R_L=10\text{k}\Omega$, $V_{CC}=+5\text{V}$

Parameters	Symbol	Unit	Value			Comment
			MIN	TYP	MAX	
Peak to peak output ripple at oscillator frequency ($f_{\text{typ}}=450\text{kHz}$)	F02P006S05L	—	mV	40	160	$R_L=1\text{k}\Omega$
	F02P015S05L			15	60	
	F02P025S05L			10	40	
	F02P050S05L			5	20	
Reaction time (at 10% of I_{PN})	F02P006S05L	t_{ra}	μs		0.3	$R_L=1\text{k}\Omega$, $di/dt=18\text{A}/\mu\text{s}$
	F02P015S05L				0.3	$R_L=1\text{k}\Omega$, $di/dt=44\text{A}/\mu\text{s}$
	F02P025S05L				0.3	$R_L=1\text{k}\Omega$, $di/dt=68\text{A}/\mu\text{s}$
	F02P050S05L				0.3	$R_L=1\text{k}\Omega$, $di/dt=100\text{A}/\mu\text{s}$
Response time 1 (at 90% of I_{PN})	F02P006S05L	t_r	μs		0.3	$R_L=1\text{k}\Omega$, $di/dt=18\text{A}/\mu\text{s}$
	F02P015S05L				0.3	$R_L=1\text{k}\Omega$, $di/dt=44\text{A}/\mu\text{s}$
	F02P025S05L				0.3	$R_L=1\text{k}\Omega$, $di/dt=68\text{A}/\mu\text{s}$
	F02P050S05L				0.3	$R_L=1\text{k}\Omega$, $di/dt=100\text{A}/\mu\text{s}$
Frequency bandwidth ($\pm 1\text{dB}$)	BW	kHz	200			$R_L=1\text{k}\Omega$
Frequency bandwidth ($\pm 3\text{dB}$)	BW	kHz	300			$R_L=1\text{k}\Omega$
Overall Accuracy (at $T_A=25^{\circ}\text{C}$)	F02P006S05L	X_G	%		1.7	$X_G = (100 \times V_{oe}/625) + \varepsilon_G + \varepsilon_L$
	F02P015S05L				1.2	
	F02P025S05L				1.0	
	F02P050S05L				0.9	

STANDARDS

EN62477-1 : 2012 and EN62477-1 : 2012/A11 2014, EN61010-1, EN62368-1, UL508 (file No E243511)

※ Please refer to the another sheet about conditions of UL Recognition.

Characteristic curve (TYP)

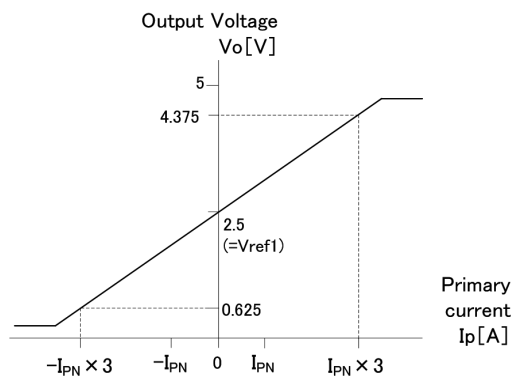


Figure 1 : Linearity curve (Internal reference voltage)

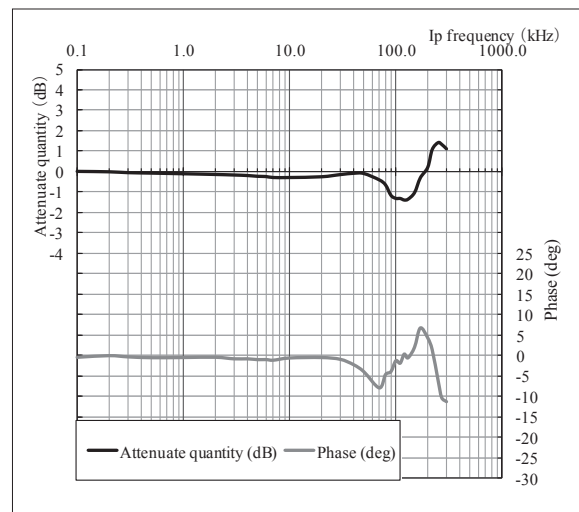


Figure 2 : Frequency response curve

ex) F02P025S05L

Measurement condition $T_A=+25^{\circ}\text{C}$, $R_L=1\text{k}\Omega$, $I_p=3\text{A}$, $V_{CC}=+5\text{V}$

SUPPORT DOCUMENTATION

Maximum continuous DC primary current

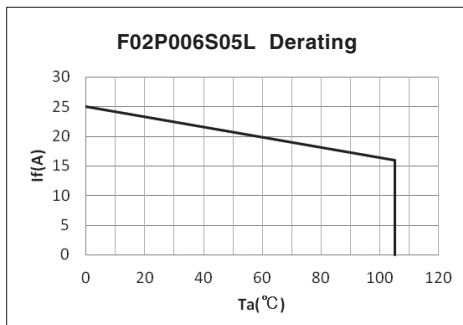


Figure 3 : Ip vs Ta for F02P006S05L

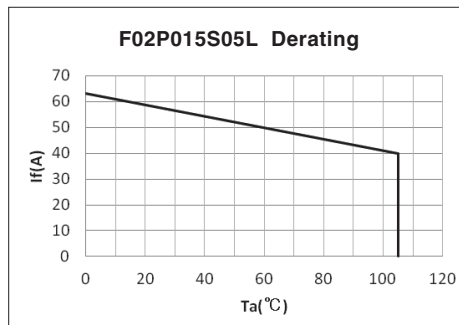


Figure 4 : Ip vs Ta for F02P015S05L

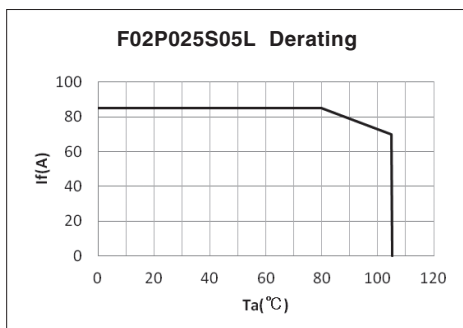


Figure 5 : Ip vs Ta for F02P025S05L

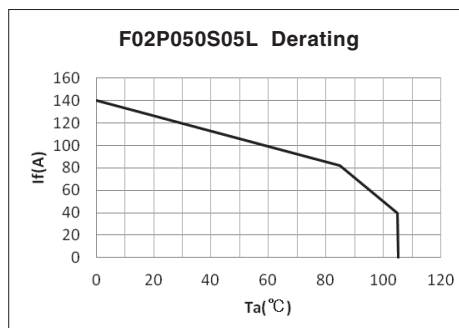


Figure 6 : Ip vs Ta for F02P050S05L

According to which the following conditions are true the maximum continuous DC primary current plot shows the boundary of the area.

- ① $I_p < I_{pmax}$
- ② Junction temperature $T_j < 125^\circ\text{C}$
- ③ Resistor power dissipation $< 0.5 \times \text{rated power}$

Frequency derating

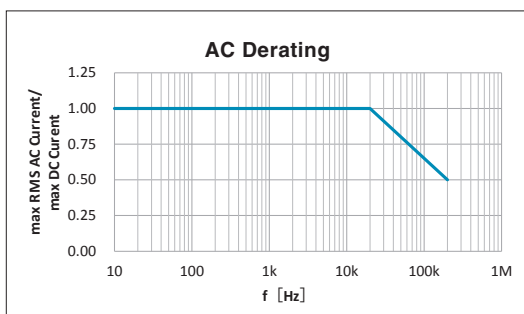


Figure 7 : Maximum RMS AC primary current/maximum DC primary current vs frequency

Reference voltage

The Ref pin has two modes Ref IN and Ref OUT :

< Ref OUT mode >


The 2.5V internal precision reference is used by the transducer as the reference point for bipolar measurements;

< Ref IN mode >

An external reference voltage is connected to the Ref pin; this voltage is specified in the range 0 to 4 V , its voltage is used as the reference voltage at the time of measurement.


- either to source a typical current of $(V_{ref} - 2.5) / 680$, the maximum value will be 2.2mA typ.when $V_{ref2} = 4V$.
- or to sink a typical current of $(2.5 - V_{ref2}) / 680$, the maximum value will be 3.68mA typ.when $V_{ref2} = 0V$.

The following graphs show how the measuring range of each transducer version depends on external reference voltage value V_{ref2} .

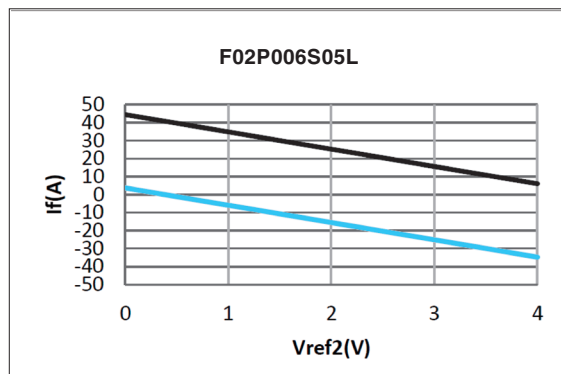


Upper limit : $I_p = -9.6 \times V_{ref2} + 44.4$ ($V_{ref2} = 0 \dots 4V$)

Lower limit : $I_p = -9.6 \times V_{ref2} + 3.6$ ($V_{ref2} = 0 \dots 4V$)

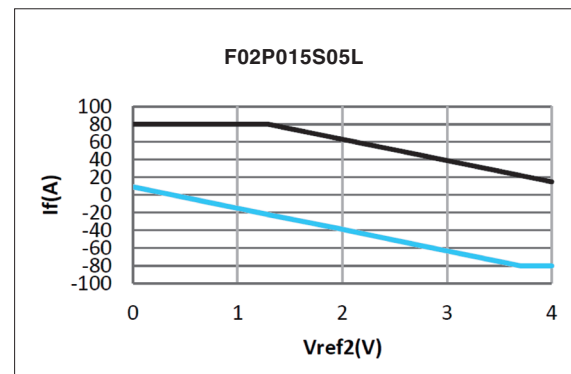


Upper limit : $I_p = 80$ ($V_{ref2} = 0 \dots 1.29V$)
 $I_p = -24 \times V_{ref2} + 111$ ($V_{ref2} = 1.29 \dots 4V$)

Lower limit : $I_p = -24 \times V_{ref2} + 9$ ($V_{ref2} = 0 \dots 3.7V$)
 $I_p = -80$ ($V_{ref2} = 3.7 \dots 4V$)

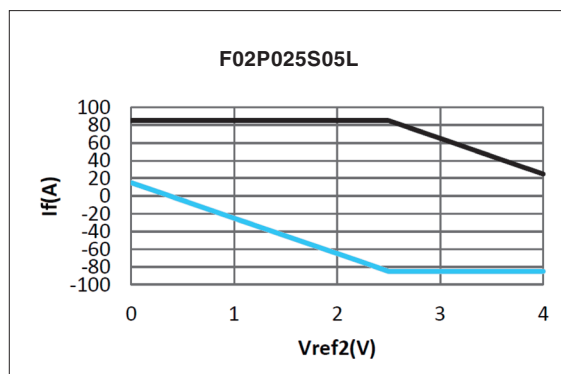

Upper limit : $I_p = 85$ ($V_{ref2} = 0 \dots 2.5V$)
 $I_p = -40 \times V_{ref2} + 185$ ($V_{ref2} = 2.5 \dots 4V$)

Lower limit : $I_p = -40 \times V_{ref2} + 15$ ($V_{ref2} = 0 \dots 2.5V$)
 $I_p = -85$ ($V_{ref2} = 2.5 \dots 4V$)


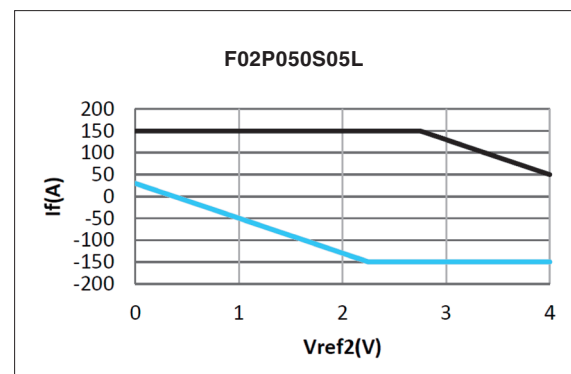


Upper limit : $I_p = 150$ ($V_{ref2} = 0 \dots 2.25V$)
 $I_p = -80 \times V_{ref2} + 370$ ($V_{ref2} = 2.25 \dots 4V$)




Lower limit : $I_p = -80 \times V_{ref2} + 30$ ($V_{ref2} = 0 \dots 2.25V$)
 $I_p = -150$ ($V_{ref2} = 2.25 \dots 4V$)

If you do not want to use the Ref pin, please unconnected.



CONNECTION

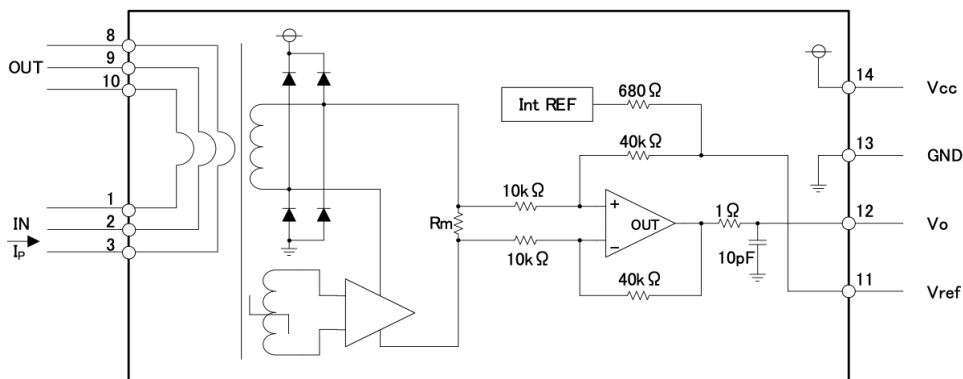


DIMENSIONS (mm)

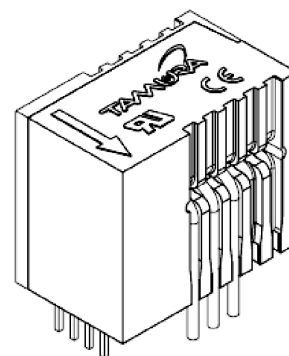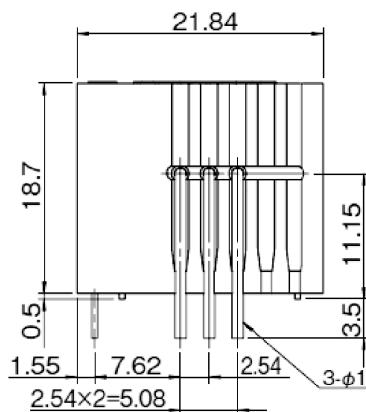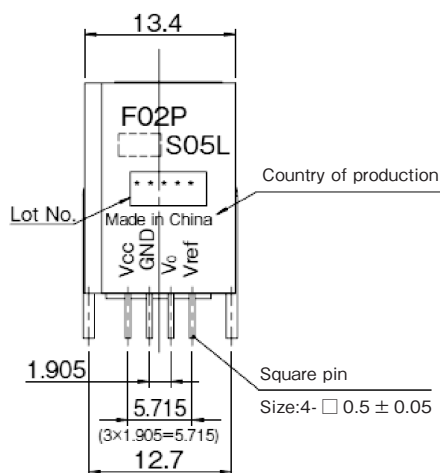

Terminal number	Note
① Input	1. Unless otherwise specified, tolerances shall be $\pm 0.25\text{mm}$
② Input	
③ Input	2. Unit is [mm]
④ —	
⑤ —	⑪ Vref
⑥ —	⑫ Vo
⑦ —	⑬ GND
⑧ Output	⑭ Vcc
⑨ Output	
⑩ Output	

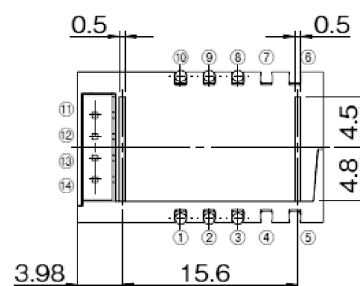


RECOMMENDED HOLE DIAMETER (mm)

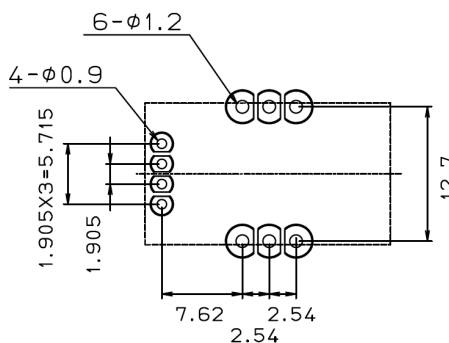

Identification marking

The top side of product is marked for identification with the previous model.

Rated current 6A ... Blue color
 Rated current 15A ... White color
 Rated current 25A ... Orange color
 Rated current 50A ... Green color



↑ Mark shape : L

Important Notice

1. The content of this information is subject to change without prior notice for the purpose of improvements, etc. Ensure that you are in possession of the most up-to-date information when using this product.
2. This product is intended to be used in general electronics applications (electric home appliances, business equipment, information equipment, communication terminal equipment, measuring devices, industrial equipment, and so on). This product is neither intended nor warranted for use in following equipment or devices:
Special application (such as for medical devices, transportation equipment, traffic signal control equipment, fire and crime prevention equipment, aeronautics and space devices, nuclear power control, fuel control, in-vehicle equipment, safety devices, and so on) in which extremely high quality and high reliability is required, or if the malfunction or failures of product could be cause loss of human life, bodily injury.
Tamura Corporation shall not be held responsible for any damage incurred by customers or any third party when products are used in special application, unless specifically permitted in this document.
3. Tamura Corporation constantly strives to improve quality and reliability, but malfunction or failures are bound to occur with some probability in current sensor. To ensure that failures do not cause accidents resulting in injury or death, fire accidents, social damage, and so on, users are to thoroughly verify the safety of their designs in devices and/or systems.
4. The operation examples and circuit examples shown in this information are for reference purposes only, and Tamura Corporation disclaims all responsibility for any violations of industrial property rights, intellectual property rights and any other rights owned by Tamura Corporation or third parties that these may entail.
5. The circuit examples and part constants listed in these specifications are provided as reference for the verification of characteristics. The user is to perform design, verification, and judgment under his or her own responsibility, taking into account the various conditions.
6. The products are designed for use in environments where consumer electronics are commonly used. It is not designed for use in special environments such as listed below, and if such use is considered, the user is to perform thorough safety and reliability checks under his/her responsibility.
7. This product is not designed to resist radiation.
 - Use in liquids such as water, oil, chemical solutions, or organic solvents, and use in locations where the product will be exposed to such liquids.
 - Use that involves exposure to direct sunlight, outdoor exposure, or dusty conditions.
 - Use in locations where corrosive gases such as sea winds, Cl₂, H₂S, NH₃, SO₂, or NO₂, are present. (Some product improves durability)
 - Use in environments with strong static electricity or electromagnetic radiation.
 - Use that involves placing inflammable material next to the product.
 - Use of this product either sealed with a resin filling or coated with resin.
 - Use of water or a water soluble detergent for flux cleaning.
 - Use in locations where condensation is liable to occur.
8. Do not use or otherwise make available the TAMURA products or the technology described in this document for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of mass destruction weapons (e.g. nuclear, chemical, or biological weapons or missile technology products). When exporting and re-exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations including, without limitation, Japan -Foreign Exchange and Foreign Trade Control Law and U.S.-Export Administration Regulations. The TAMURA products and related technology should not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
9. Please contact your TAMURA sales office for details as to environmental matters such as the RoHS compatibility of Product. Please use TAMURA products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. TAMURA assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
10. TAMURA assumes no liability for damages or losses incurred by you or third parties as a result of unauthorized use of TAMURA products.
11. This document and any information herein may not be reproduced in whole or in part without prior written permission from TAMURA.

Application notes

<General Considerations>

1. The sensor uses polar electronic components. When the polarity of the power supply is mistaken, the sensor is damaged.
2. Static electricity or excessive voltage can increase an offset voltage in the Hall element, and cause offset voltage to change. Please exercise care in handling and application.
3. In order to prevent the influence of noise, the use of twisted cable or shielded cable for the output line is recommended
4. If using this device within a magnetic field generated by other devices, the specified accuracy may not be obtainable.
5. Our products (several models are excluded) are adjusted with the trimming method by the measurement condition (Load resistance, Power supply voltage) of specification sheets. Therefore, characteristics (Offset, Output, etc.) and its deviation may be changed in different circuit conditions from the measurement condition. All change characteristic items are not indicated on specification sheets.
6. The performance of current sensors with through-hole (aperture) is dependent on the position of the primary conductor. Tamura specifications are based on a primary conductor completely filling the through-hole (aperture) area.
7. The current sensor rated current in DC Amps.
8. Please use mating connector with equivalent terminal plating material to insure proper operation and avoid possibility of 'galvanic corrosion' .
9. Please do not store in high-temperature and high-humidity storage environment. Please use it after confirming soldering when it is kept for six months or more. (product soldered with substrate)
10. We recommend performing a zero offset adjustment by measuring the offset voltage at startup. In continuously operation for a few months, or at change of ambient temperature or humidity is large, we recommend regularly performing a zero offset adjustment at being idling (it is clear that the current is not apply) .
11. The current sensor doesn't have built-in protection circuit (devices and fuses, etc.). As a failure mode of the sensor, there is a short circuit and open state. In the case of a short-circuit state, the abnormal temperature rise of the internal parts is assumed, and there is a possibility to smoke and to ignite. If it is used in safety critical circuit blocks, please take appropriate measures by protection devices, protection circuits, etc. For closed loop -type sensors and flux gate (closed loop type) sensors, the consumption current of the secondary power supply varies in proportion to the measurement current.

<Open loop>

1. High frequency primary current may result in excessive heating in iron magnetic core and cause damage to internal circuitry; for high frequency applications select current sensor with ferrite core material.
2. If the measured current exceeds the rated current, magnetic core saturation will occur and the output voltage signal will not be linearly proportional to the measured current.

<Closed Loop>

1. For closed loop current sensors please insure the power supply voltage is balanced, symmetrical, and, applied simultaneously to avoid potential increase in DC offset error.
2. Maximum rated current measurement duration is timedependent. Maximum rated current applied in excess of the time limit can result in damage to internal electronic circuitry; please consult Tamura for assistance.
3. When using a measurement resistor to convert current output to voltage output select a resistor with stable temperature characteristic to insure accuracy of the output voltage.
4. Compensation current supplied to the secondary winding varies in proportion to the measured current based on the conversion ratio. (If/ KN ; KN = secondary turns) Please insure the PSU has required current capacity to supply compensation current to the secondary winding.

<Flux-Gate>

1. Compensation current supplied to the secondary winding varies in proportion to the measured current. Please insure the PSU has required current capacity to supply compensation current to the secondary winding.
2. There is 450kHz ripple voltage present on the output and reference output voltage signals . An external capacitor maybe added if necessary.