
MOSFET


PG-VSON-8 / PG-WSON-8

OptiMOS™ 5 Power-Transistor, 80 V



Features

- Dual-side cooled package with lowest Junction-top thermal resistance
- Optimized for synchronous rectification in server and desktop
- 100% avalanche tested
- Superior thermal resistance
- N-channel
- 175°C rated
- Pb-free lead plating; RoHS compliant
- Halogen-free according to IEC61249-2-21



Product validation

Qualified for industrial applications according to the relevant tests of JEDEC JESD47, JESD22 and J-STD-020.

Table 1 Key performance parameters

Parameter	Value	Unit
V_{DS}	80	V
$R_{DS(on),max}$	2.3	mΩ
I_D	202	A
Q_{oss}	90	nC
Q_G(0V..10V)	78	nC

Hal Pb RoHS

Part number	Package	Marking	Related links
BSC023N08NS5SC	PG-VSON-8 / PG-WSON-8	023N08SC	-

Downloaded from Arrow.com.

Table of contents

Description 1
Maximum ratings 3
Thermal characteristics 3
Electrical characteristics 4
Electrical characteristics diagrams 6
Package outlines 10
Revision history 13
Trademarks 14
Disclaimer 14

Downloaded from Arrow.com.

1 Maximum ratings

at T_A=25 °C, unless otherwise specified

Table 2 Maximum ratings

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Continuous drain current [1]	I_D	-	-	202	A	V_{GS}=10 V, T_C=25 °C
				143		V_{GS}=10 V, T_C=100 °C
				26		V_{GS}=10 V, T_C=25 °C, R_{thJA}=50K/W [2]
Pulsed drain current [3]	$I_{D,pulse}$	-	-	808	A	T_C=25 °C
Avalanche energy, single pulse [4]	E_{AS}	-	-	278	mJ	I_D=50 A, R_{GS}=25 Ω
Gate source voltage	V_{GS}	-20	-	20	V	-
Power dissipation	P_{tot}	-	-	188	W	T_C=25 °C
				3.0		T_A=25 °C, R_{thJA}=50 K/W [2]
Operating and storage temperature	T_j, T_{stg}	-55	-	175	°C	-

[1] Rating refers to the product only with datasheet specified absolute maximum values, maintaining case temperature as specified. For other case temperatures please refer to Diagram 2. De-rating will be required based on the actual environmental conditions.

[2] Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm^2 (one layer, 70 µm thick) copper area for drain connection. PCB is vertical in still air.

[3] See Diagram 3 for more detailed information

[4] See Diagram 13 for more detailed information

2 Thermal characteristics

at T_j=25 °C, unless otherwise specified

Table 3 Thermal characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Thermal resistance, junction - case, bottom	R_{thJC}	-	0.4	0.8	K/W	-
Thermal resistance, junction - case, top	R_{thJC}		0.36	0.72		
Device on PCB, 6 cm^2 cooling area [5]	R_{thJA}		-	50		

[5] Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm^2 (one layer, 70 µm thick) copper area for drain connection. PCB is vertical in still air.

Downloaded from Arrow.com.

3 Electrical characteristics

at T_j=25 °C, unless otherwise specified

Table 4 Static characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Drain-source breakdown voltage	$V_{(BR)DSS}$	80	-	-	V	V_{GS}=0 V, I_D=1 mA
Gate threshold voltage	$V_{GS(th)}$	2.2	3	3.8	V	V_{DS}=V_{GS}, I_D=115 µA
Zero gate voltage drain current	I_{DSS}	-	0.1	1	µA	V_{DS}=80 V, V_{GS}=0 V, T_j=25 °C
			10	100		V_{DS}=80 V, V_{GS}=0 V, T_j=125 °C
Gate-source leakage current	I_{GSS}	-	10	100	nA	V_{GS}=20 V, V_{DS}=0 V
Drain-source on-state resistance	$R_{DS(on)}$	-	1.94	2.3	mΩ	V_{GS}=10 V, I_D=50 A
			2.7	3.5		V_{GS}=6 V, I_D=25 A
Gate resistance	R_G	-	1.3	2.0	Ω	-
Transconductance	g_{fs}	60	120	-	S	$\|V_{DS}\|>2\|I_D\|R_{DS(on)max}$, I_D=50 A

Table 5 Dynamic characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Input capacitance	C_{iss}	-	5200	6800	pF	V_{GS}=0 V, V_{DS}=40 V, f=1 MHz
Output capacitance [6)]	C_{oss}		850	1100		
Reverse transfer capacitance [6)]	C_{rss}		42	74		
Turn-on delay time	$t_{d(on)}$	-	21	-	ns	V_{DD}=40 V, V_{GS}=10 V, I_D=50 A, $R_{G,ext}$=3 Ω
Rise time	t_r		13			
Turn-off delay time	$t_{d(off)}$		40			
Fall time	t_f		14			

6) Defined by design. Not subject to production test.

Downloaded from Arrow.com.

Table 6 Gate charge characteristics [7)]

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Gate to source charge	Q_{gs}	-	23	-	nC	V_{DD}=40 V, I_D=50 A, V_{GS}=0 to 10 V
Gate charge at threshold	$Q_{g(th)}$		16	-	nC	
Gate to drain charge [8)]	Q_{gd}		19	28	nC	
Switching charge	Q_{sw}		27	-	nC	
Gate charge total [8)]	Q_g		78	98	nC	
Gate plateau voltage	$V_{plateau}$		4.5	-	V	
Gate charge total, sync. FET	$Q_{g(sync)}$	-	66	-	nC	V_{DS}=0.1 V, V_{GS}=0 to 10 V
Output charge [8)]	Q_{oss}	-	90	120	nC	V_{DD}=40 V, V_{GS}=0 V

[7)] See "Gate charge waveforms" for parameter definition

[8)] Defined by design. Not subject to production test.

Table 7 Reverse diode


Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Diode continuous forward current	I_S	-	-	148	A	T_C=25 °C
Diode pulse current	$I_{S,pulse}$			808		
Diode forward voltage	V_{SD}	-	0.84	1.1	V	V_{GS}=0 V, I_F=50 A, T_j=25 °C
Reverse recovery time [9)]	t_{rr}	-	56	112	ns	V_R=40 V, I_F=I_S, di_F/dt=100 A/µs
Reverse recovery charge [9)]	Q_{rr}		92	184	nC	

[9)] Defined by design. Not subject to production test.

Downloaded from Arrow.com.


4 Electrical characteristics diagrams

Diagram 1: Power dissipation

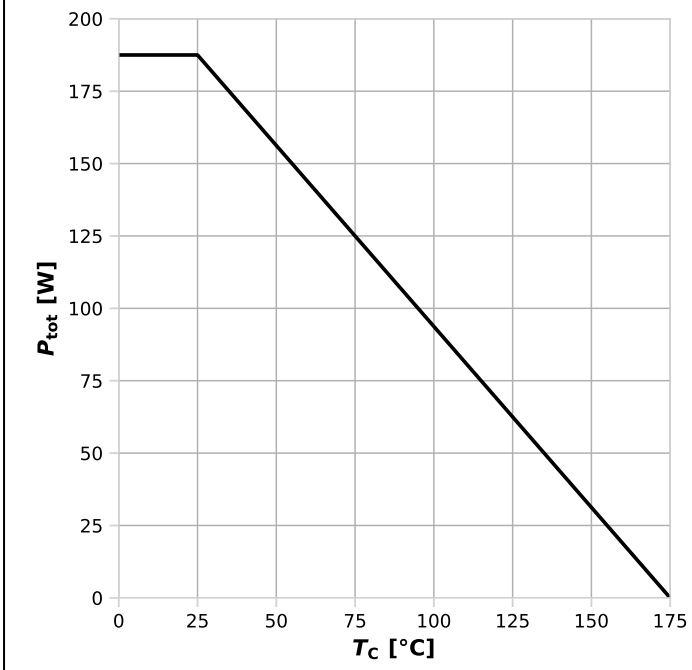


P_{tot}=f(T_C)

Diagram 2: Drain current

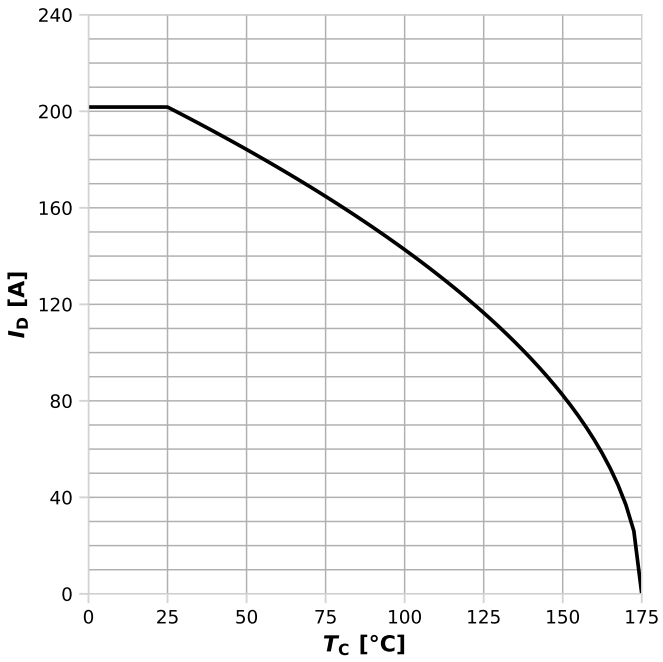


I_D=f(T_C); V_{GS}≥10 V

Diagram 3: Safe operating area

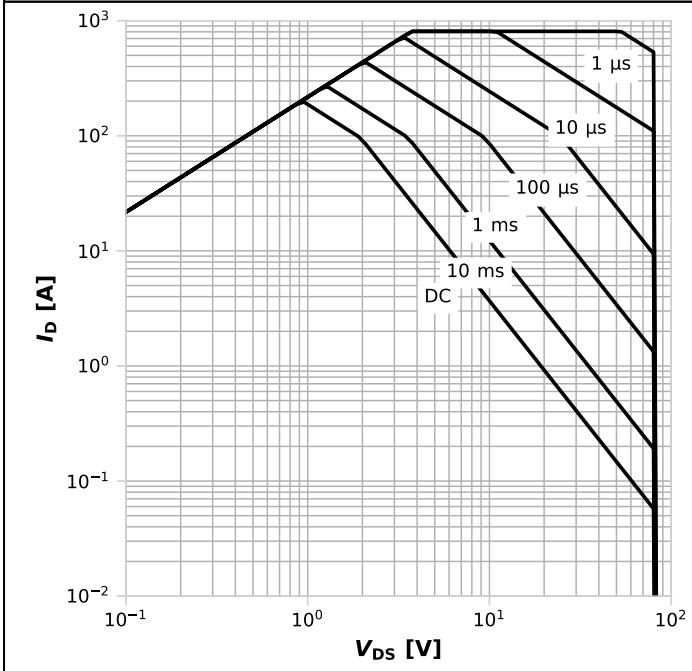

I_D=f(V_{DS}); T_C=25 °C; D=0; parameter: t_p


Diagram 4: Max. transient thermal impedance

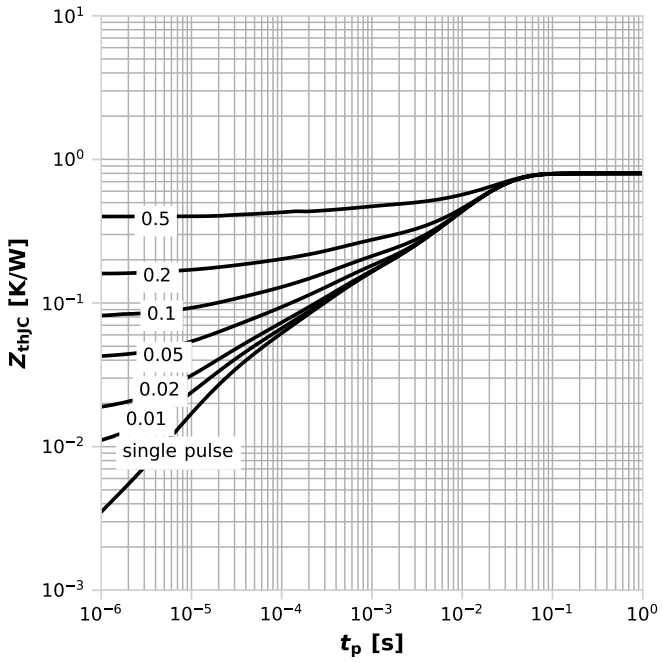

Z_{thJC}=f(t_p); parameter: D=t_p/T


Downloaded from Arrow.com.

Diagram 5: Typ. output characteristics

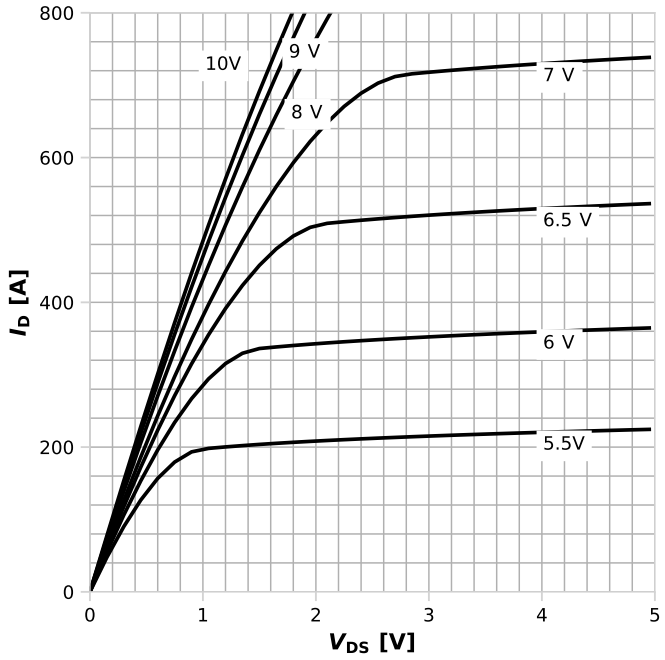


I_D=f(V_{DS}), T_j=25 °C; parameter: V_{GS}

Diagram 6: Typ. drain-source on resistance

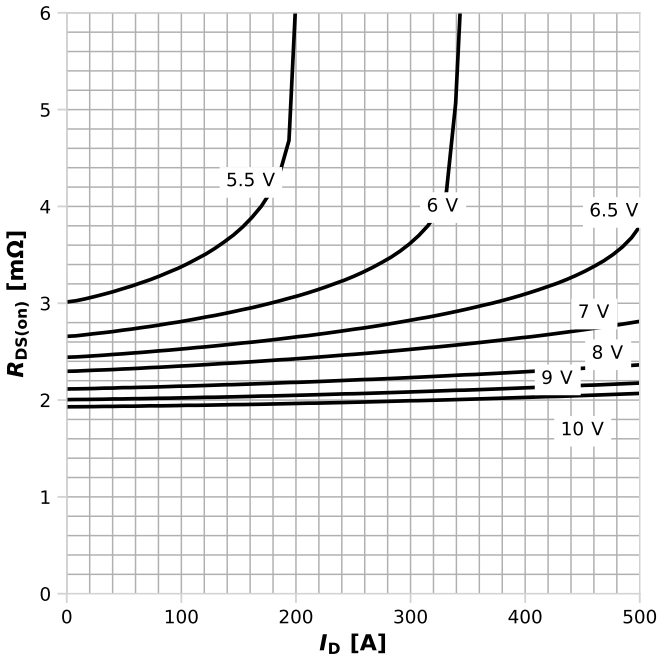


$R_{DS(on)}$=f(I_D), T_j=25 °C; parameter: V_{GS}

Diagram 7: Typ. transfer characteristics

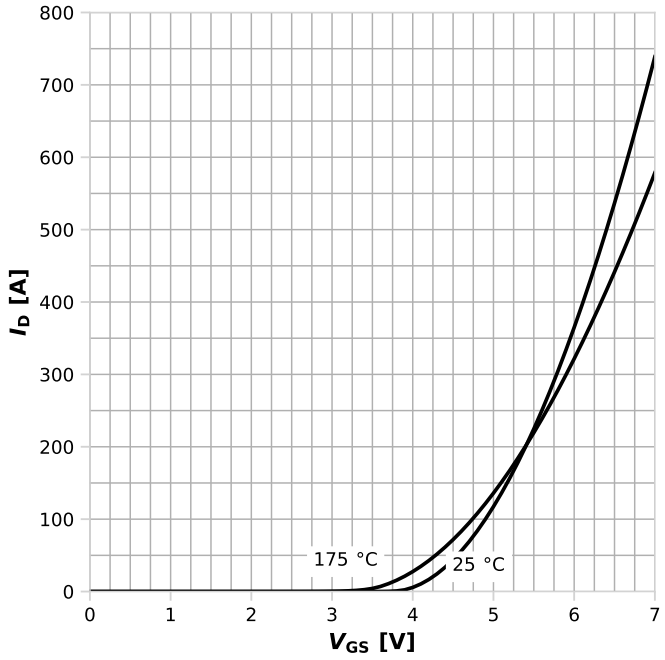

I_D=f(V_{GS}), |V_{DS}|>2|I_D|$R_{DS(on)max}$; parameter: T_j


Diagram 8: Typ. forward transconductance

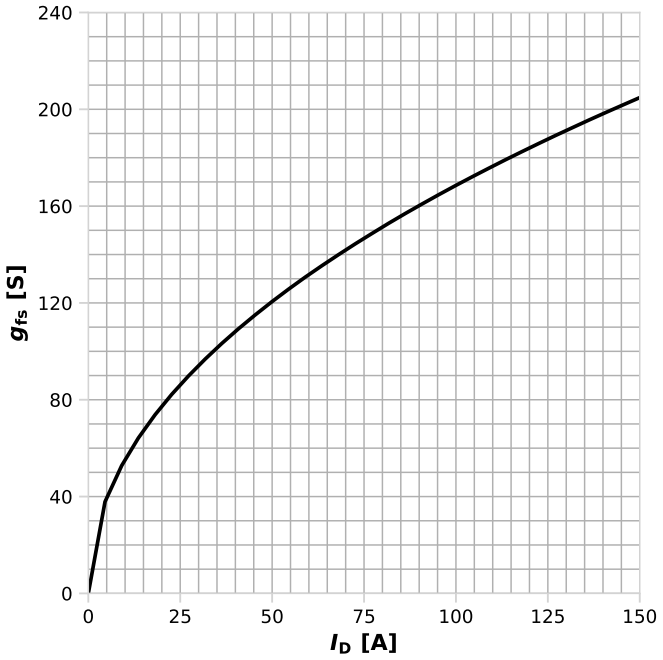

g_{fs}=f(I_D), V_{DS}=3 V, T_j=25 °C


Downloaded from Arrow.com.

Diagram 9: Drain-source on-state resistance

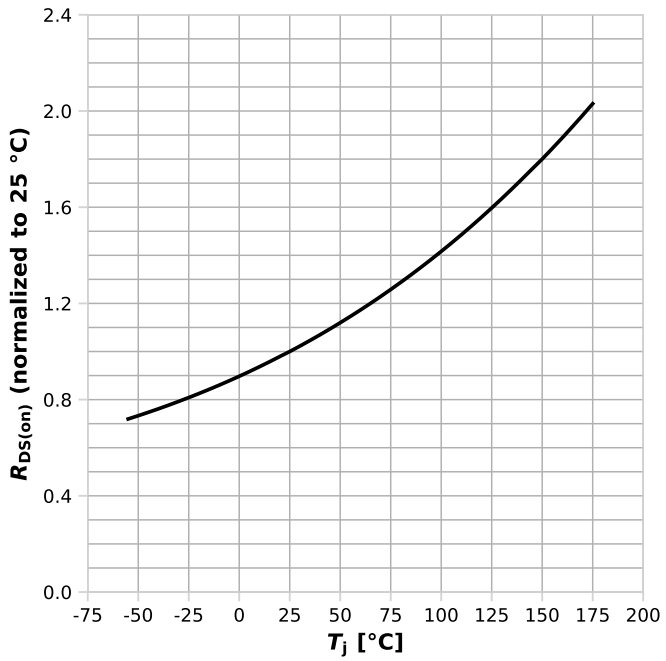


$R_{DS(on)}$=f(T_j), I_D=50 A, V_{GS}=10 V

Diagram 10: Typ. gate threshold voltage

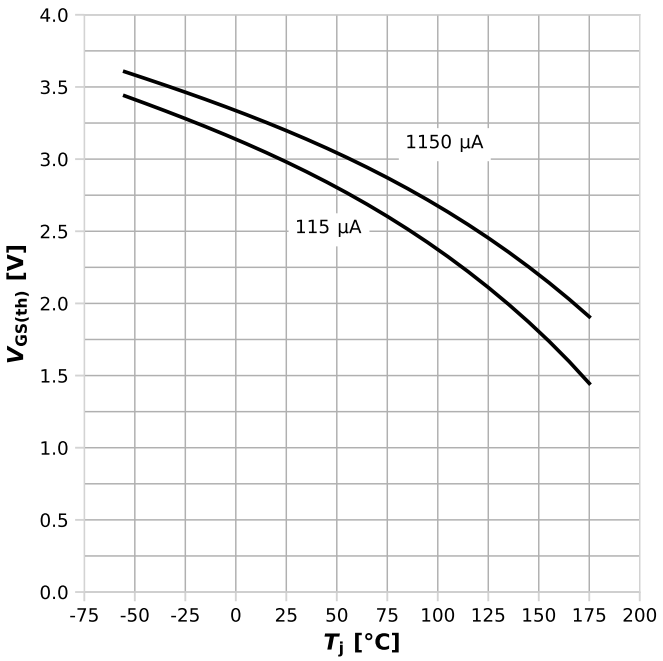


$V_{GS(th)}$=f(T_j), V_{GS}=V_{DS}; parameter: I_D

Diagram 11: Typ. capacitances

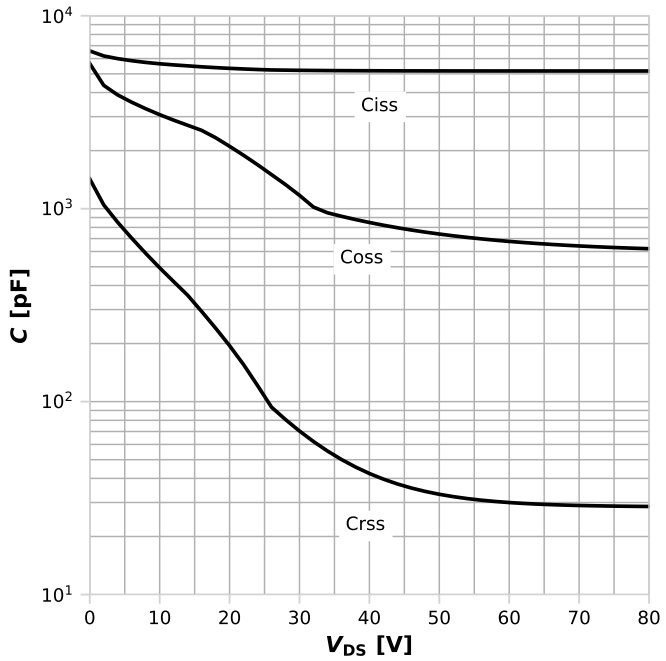

C=f(V_{DS}); V_{GS}=0 V; f=1 MHz

Diagram 12: Forward characteristics of reverse diode

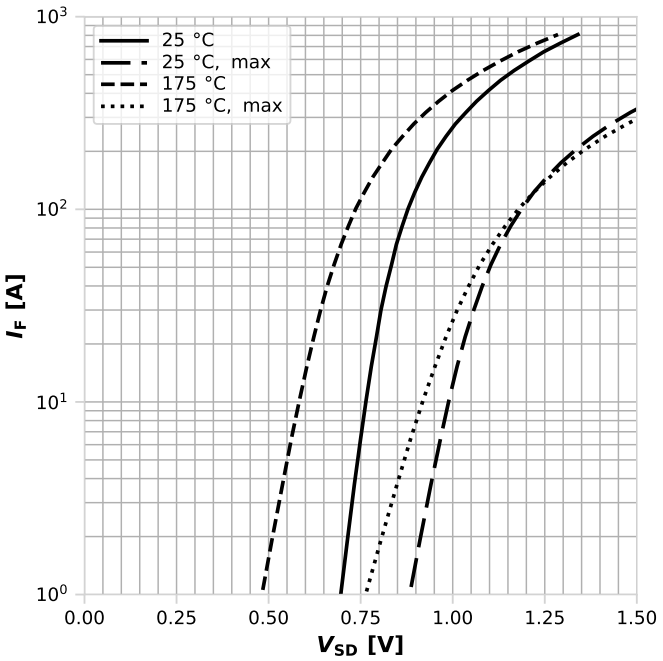

I_F=f(V_{SD}); parameter: T_j

Downloaded from Arrow.com.





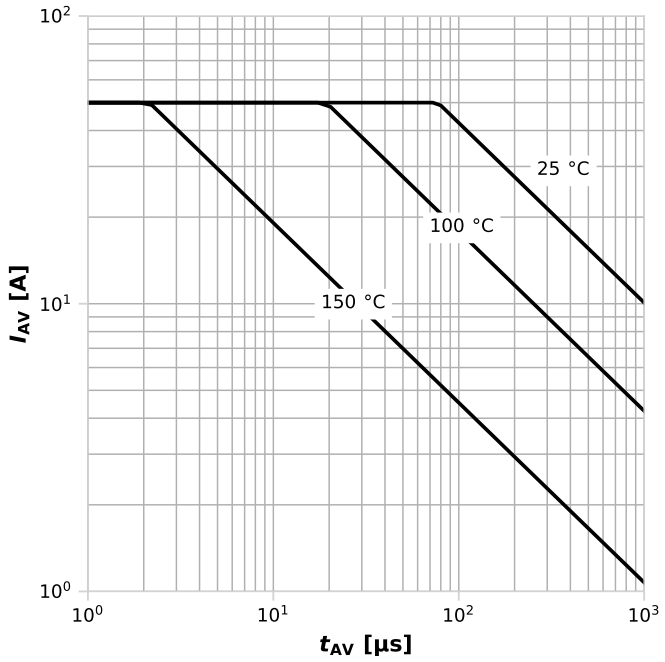
Diagram 13: Avalanche characteristics	Diagram 14: Typ. gate charge
	
I_{AS}=f(t_{AV}); R_{GS}=25 Ω; parameter: $T_{j,start}$	V_{GS}=f(Q_{gate}), I_D=50 A pulsed, T_j=25 °C; parameter: V_{DD}

Diagram 15: Drain-source breakdown voltage	Gate charge waveforms
	
$V_{BR(DSS)}$=f(T_j); I_D=1 mA	-

Downloaded from Arrow.com.

5 Package outlines

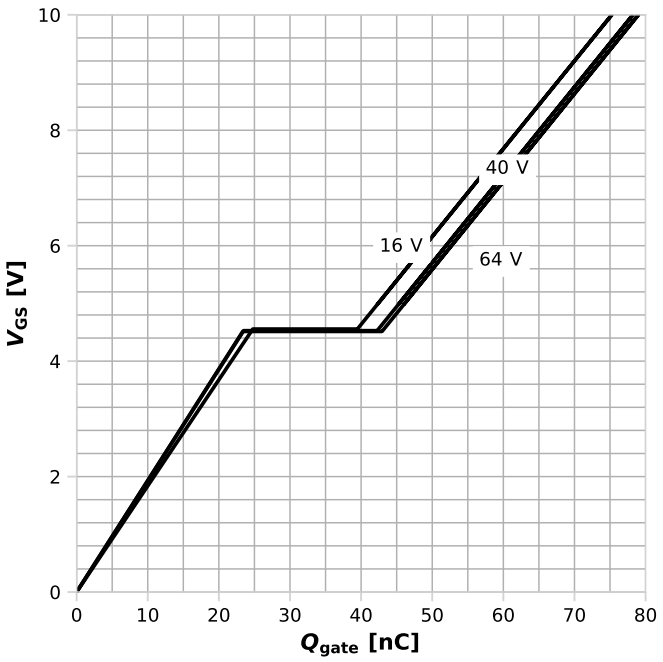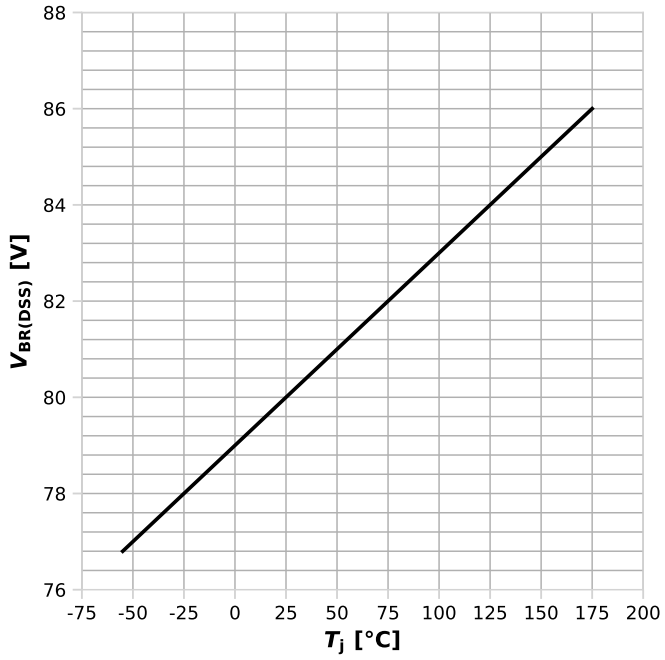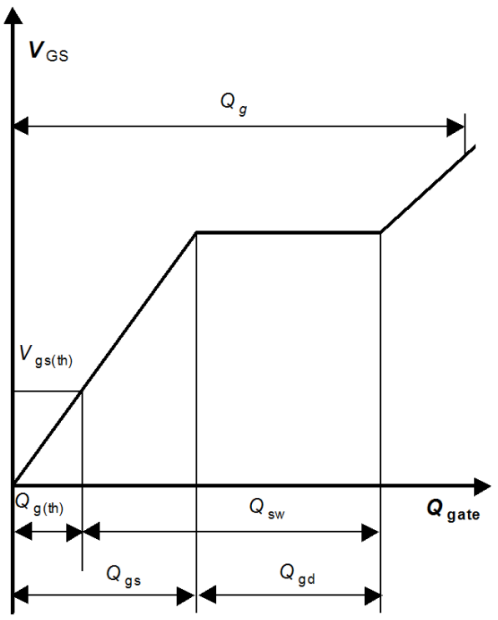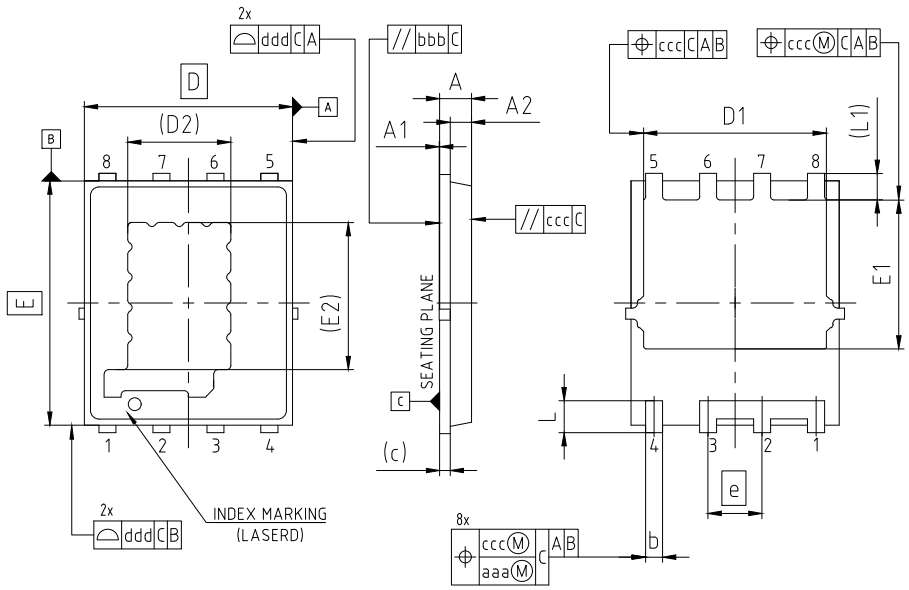


PACKAGE - GROUP NUMBER:	PG-VSON-8-U01				
DIMENSIONS	MILLIMETERS		DIMENSIONS	MILLIMETERS	
	MIN.	MAX.		MIN.	MAX.
A	0.65	0.85	e	1.27	
A1	0.00	0.05	L	0.70	0.90
A2	0.45	0.55	L1	0.52	0.72
b	0.35	0.55	aaa	0.05	
c	0.25		bbb	0.08	
D	4.90		ccc	0.10	
D1	4.20	4.40	ddd	0.15	
D2	2.43				
E	5.75				
E1	3.40	3.60			
E2	3.46				

NOTE: DIMENSIONS DO NOT INCLUDE MOLD FLASH, PROTRUSION OR GATE BURRS

Figure 1 Outline PG-VSON-8 / PG-WSON-8, dimensions in mm

Downloaded from Arrow.com.

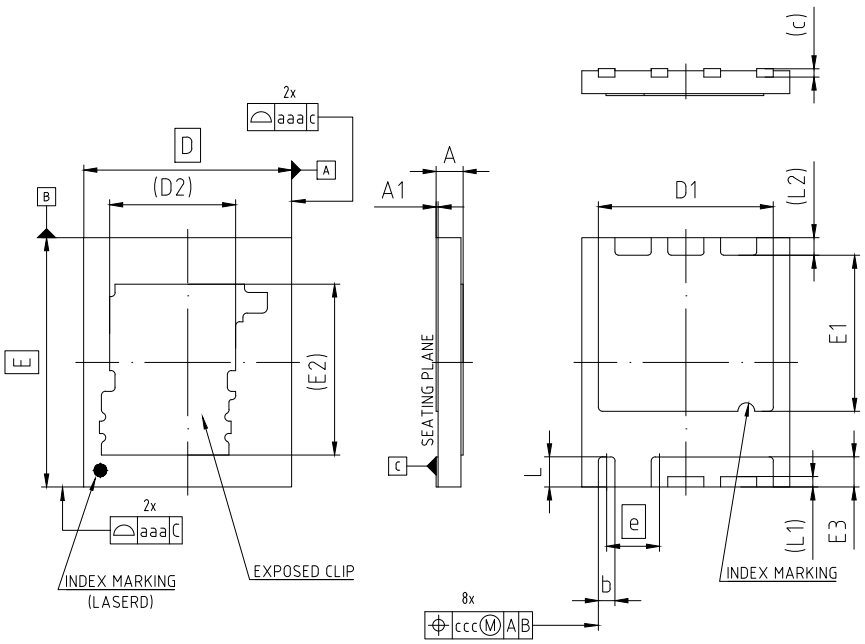

PACKAGE - GROUP NUMBER:	PG-WSON-8-U01					
DIMENSIONS	MILLIMETERS		DIMENSIONS	MILLIMETERS		
	MIN.	MAX.		MIN.	MAX.	
A	0.55	0.75	e	1.27		
A1	0.00	0.05	L	0.68	0.78	
b	0.35	0.45	L1	0.25		
c	0.20		L2	0.42		
D	5.00		aaa	0.05		
D1	4.11	4.31	ccc	0.10		
D2	3.03					
E	6.00					
E1	3.66	3.86				
E2	4.11					
E3	0.63	0.83				

NOTE: DIMENSIONS DO NOT INCLUDE MOLD FLASH, PROTRUSION OR GATE BURRS

Figure 2 PG-VSON-8 / PG-WSON-8, dimensions in mm

Downloaded from Arrow.com.

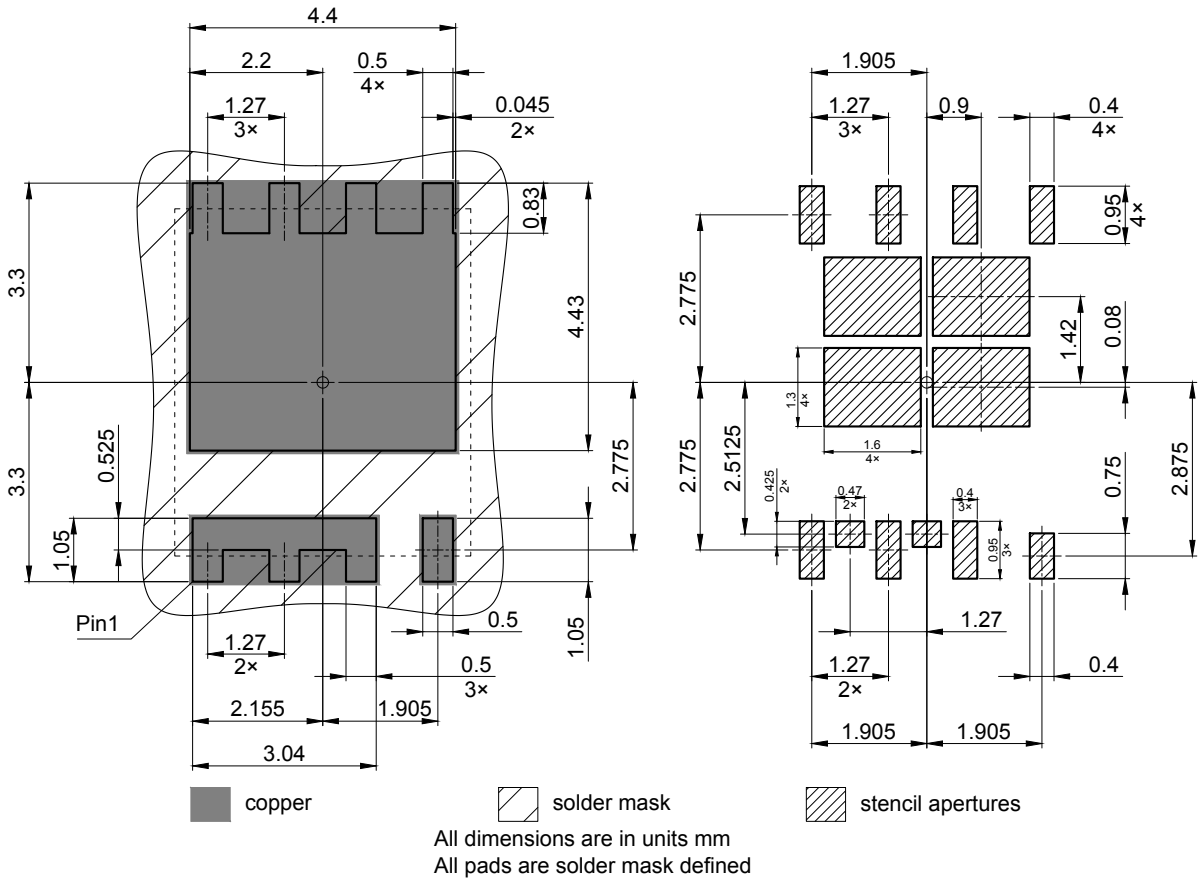


Figure 3 Bonding diagram PG-VSON-8 / PG-WSON-8, dimensions in mm

Downloaded from Arrow.com.

Revision history

BSC023N08NS5SC

Revision 2025-06-18, Rev. 2.2

Previous revisions

Revision	Date	Subjects (major changes since last revision)
2.0	2022-09-17	Release of final version
2.1	2022-10-07	Update "Features
2.2	2025-06-18	Update package drawings

Downloaded from Arrow.com.

Trademarks
All referenced product or service names and trademarks are the property of their respective owners.

We Listen to Your Comments Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to: **erratum@infineon.com**

Published by
Infineon Technologies AG
81726 München, Germany
© 2025 Infineon Technologies AG
All Rights Reserved.

Important notice
The products which may also include samples and may be comprised of hardware or software or both ("Product") are sold or provided and delivered by Infineon Technologies AG and its affiliates ("Infineon") subject to the terms and conditions of the frame supply contract or other written agreement(s) executed by a customer and Infineon or, in the absence of the foregoing, the applicable Sales Conditions of Infineon. General terms and conditions of a customer or deviations from applicable Sales Conditions of Infineon shall only be binding for Infineon if and to the extent Infineon has given its express written consent.

For the avoidance of doubt, Infineon disclaims all warranties of non-infringement of third-party rights and implied warranties such as warranties of fitness for a specific use/purpose or merchantability.

Infineon shall not be responsible for any information with respect to samples, the application or customer's specific use of any Product or for any examples or typical values given in this document.

The data contained in this document is exclusively intended for technically qualified and skilled customer representatives. It is the responsibility of the customer to evaluate the suitability of the Product for the intended application and the customer's specific use and to verify all relevant technical data contained in this document in the intended application and the customer's specific use. The customer is responsible for properly designing, programming, and testing the functionality and safety of the intended application, as well as complying with any legal requirements related to its use.

Unless otherwise explicitly approved by Infineon, Products may not be used in any application where a failure of the Product or any consequences of the use thereof can reasonably be expected to result in personal injury. However, the foregoing shall not prevent the customer from using any Product in such fields of use that Infineon has explicitly designed and sold it for, provided that the overall responsibility for the application lies with the customer.

If the Product includes security features:
Because no computing device can be absolutely secure, and despite security measures implemented in the Product, Infineon does not guarantee that the Product will be free from intrusion, data theft or loss, or other breaches ("Security Breaches"), and Infineon shall have no liability arising out of any Security Breaches.

If this document includes or references software:
The software is owned by Infineon under the intellectual property laws and treaties of the United States, Germany, and other countries worldwide. All rights reserved. Therefore, you may use the software only as provided in the software license agreement accompanying the software. If no software license agreement applies, Infineon hereby grants you a personal, non-exclusive, non-transferable license (without the right to sublicense) under its intellectual property rights in the software (a) for software provided in source code form, to modify and reproduce the software solely for use with Infineon hardware products, only internally within your organization, and (b) to distribute the software in binary code form externally to end users, solely for use on Infineon hardware products. Any other use, reproduction, modification, translation, or compilation of the software is prohibited.

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Downloaded from Arrow.com.