

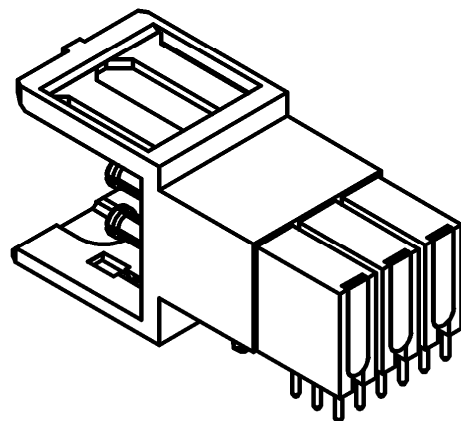

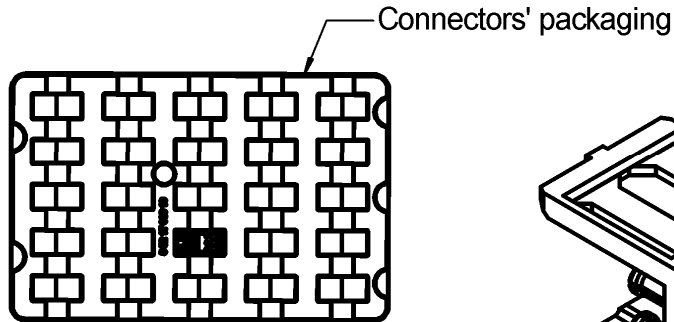
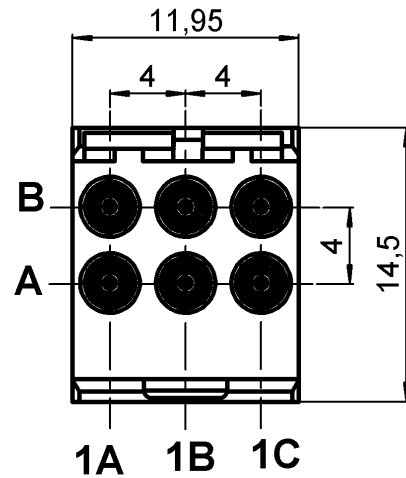


R/A MALE MODULE 6 SOLDER TYPE INSERTS
2.5MM FOR PCB

R694.251.117

Series : MCC2

3 Coax Position AB , 1A , 1B , 1C

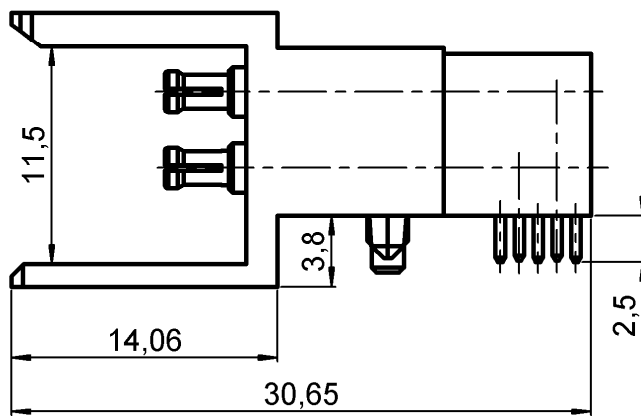

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING (μm)
BODY	BRASS	NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	NPGR
OUTER CONTACT	BRONZE	NPGR
INSULATOR	PEEK , ULTEM	
GASKET	-	-
OTHERS PARTS	LIQUID CRYSTAL POLYMER	-
-	-	-
-	-	-

Issue : 0818 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



R/A MALE MODULE 6 SOLDER TYPE INSERTS**2.5MM FOR PCB****R694.251.117**

Series : MCC2

PACKAGING

Standard	Unit	Other
25	'W' option	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	50	Ω
Frequency	0-6	GHz
VSWR	1.20* + 0,0000	x F(GHz) Maxi
Insertion loss	0.2	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	- (	- F(GHz)) dB Maxi
Voltage rating	500	Veff Maxi
Dielectric withstanding voltage	750	Veff mini
Insulation resistance	5000	M Ω mini

ENVIRONMENTAL

Operating temperature	-25/+125	$^{\circ}\text{C}$
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

OTHER CHARACTERISTICS

Assembly instruction

Others :
VSWR optimized between DC to 3GHz

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	6 N mini
Axial force – Opposite end	6 N mini
Torque	NA N.cm mini
Recommended torque	
Mating	NA N.cm
Panel nut	NA N.cm
Mating life	500 Cycles mini
Weight	83,5100 g

Issue : 0818 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




Series : **MCC2**


R/A MALE MODULE 6 SOLDER TYPE INSERTS**2.5MM FOR PCB****R694.251.117**

Series : MCC2


- Place the coax connector on the PCB

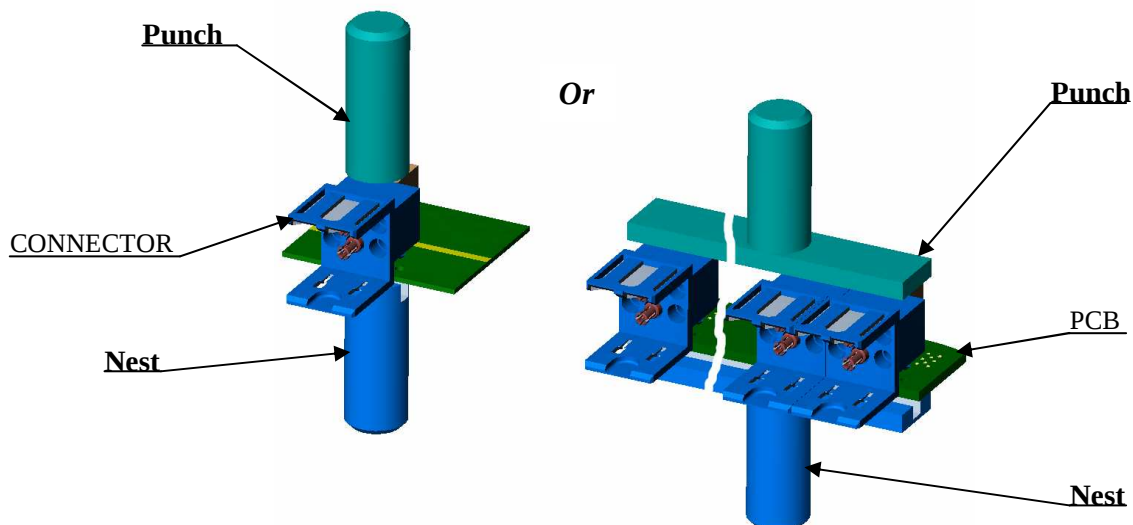

- Place correctly the PCB between the punch and the nest of the press.
- In case of multiple housing configuration, use a punch and a nest large enough to cover all the housings.
- Press on the plastic housing(s) with the punch until the complete insertion of the fixing stud into the PCB.

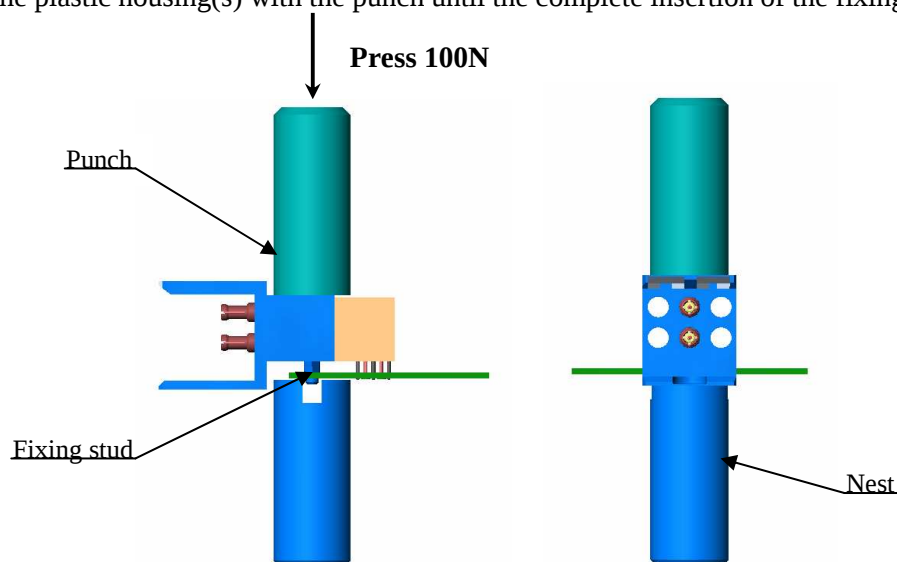

- Solder the legs on board

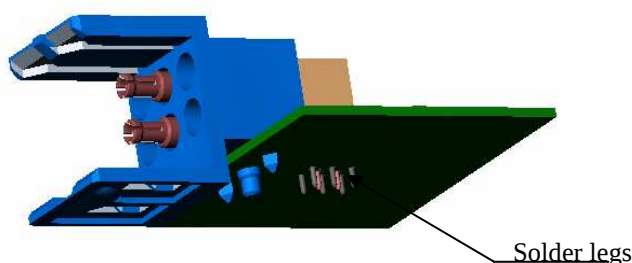

Radiall do not recommend to use more than 3 modules on the same motherboard and can't be held liable of any connection defect when more than 3 modules are implemented on the board

Issue : 0818 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

