




**Part Number :** [1731121035](#)  
**Product Description :** FCT Machined Contact, Female, Crimp, 1.30µm Gold Plating, Split Tine, 28-22 AWG, 5000 Pieces  
**Series Number :** 173112  
**Status :** Active  
**Product Category :** D-Sub Contacts  
**Engineering Number :** FK22SL-13V-6097

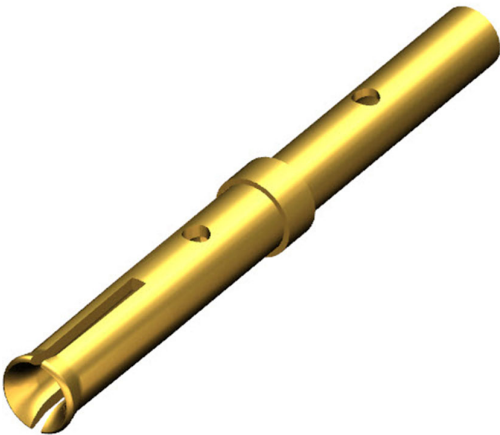


Documents & Resources

- Drawings**  
[1731121035\\_sd.pdf](#)
- Specifications**  
[1731120004-PK-000.pdf](#)  
[2195600650-000.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Reviewed per IEC 61249-2-21
REACH SVHC	Contains Lead per D(2022)4187-DC (10 June 2022)
EU RoHS	Compliant with Exemption 6(c) per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	D-Sub Contacts
Series	173112
Description	FCT Machined Contact, Female, Crimp, 1.30µm Gold Plating, Split Tine, 28-22 AWG, 5000 Pieces
Contact Type	Machined Crimp
Magnetic	Yes
Product Name	FCT Products
Type	High Density
UPC	191130082490

#### Electrical

Current - Maximum per Contact	5.0A
-------------------------------	------

#### Physical

Gender	Female
Material - Contact	Copper Alloy
Material - Plating Mating	Gold over Nickel
Material - Plating Termination	Gold over Nickel
Net Weight	0.100/g
Orientation	Straight
Packaging Type	Bag
Plating min - Mating	1.300µm
Plating min - Termination	1.300µm
Temperature Range - Operating	-55° to +130°C
Termination Style	Crimp

Wire Size (AWG)	22, 24, 26, 28
-----------------	----------------

---

Use with Part(s)

Description	Part Number
Use With	FCT High-Density Connectors

---

Application Tooling

Global

Description	Part Number
FCT Installation and Removal Tool for High-Density Contacts	<u>1731121745</u>
FCT Installation and Removal Tool for High-Density Contacts	<u>1731121746</u>

---

This document was generated on Apr 26, 2025