OptiMOS™-5 Power Transistor

AEC Qualified RoHS


Features


- OptiMOS™ power MOSFET for automotive applications
- N-channel - Enhancement mode - Logic level
- MSL1 up to 260°C peak reflow
- 175 °C operating temperature
- Green product (RoHS compliant)
- 100% Avalanche tested

Product Summary

V_{DS}	60	V
$R_{DS(on),max}$	3.2	mΩ
I_D	120	A

PG-TDSON-8-34

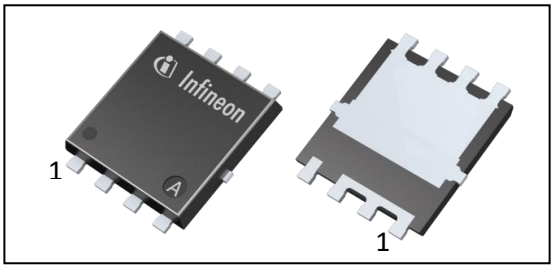



Type	Package	Marking
IAUC120N06S5L032	PG-TDSON-8-34	5N06L032

Maximum ratings, at T_j=25 °C, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Drain current	I_D	V_{GS}=10 V, Chip limitation[1,2)]	129	A
		V_{GS}=10V, DC current[3)]	120	
		T_a=85 °C, V_{GS}=10 V, R_{thJA} on 2s2p[2,4)]	21	
Pulsed drain current[2)]	$I_{D,pulse}$	T_C=25 °C, t_p= 100 µs	364	
Avalanche energy, single pulse[2)]	E_{AS}	I_D=60 A	92	mJ
Avalanche current, single pulse	I_{AS}	-	100	A
Gate source voltage	V_{GS}	-	±16	V
Power dissipation	P_{tot}	T_C=25 °C	94	W
Operating and storage temperature	T_j, T_{stg}	-	-55 ... +175	°C

Downloaded from Arrow.com.

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Thermal characteristics[2]						
Thermal resistance, junction - case	R_{thJC}	-	-	-	1.6	K/W
Thermal resistance, junction - ambient[4]	R_{thJA}	-	-	24.2	-	
Electrical characteristics, at T_j=25 °C, unless otherwise specified						
Static characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	V_{GS}=0V, I_D=1mA	60	-	-	V
Gate threshold voltage	$V_{GS(th)}$	V_{DS}=V_{GS}, I_D=44µA	1.2	1.7	2.2	
Zero gate voltage drain current	I_{DSS}	V_{DS}=60V, V_{GS}=0V, T_j=25°C	-	-	1	µA
		V_{DS}=60V, V_{GS}=0V, T_j=125°C[1]	-	-	100	
Gate-source leakage current	I_{GSS}	V_{GS}=16V, V_{DS}=0V	-	-	100	nA
Drain-source on-state resistance	$R_{DS(on)}$	V_{GS}=4.5V, I_D=60A	-	3.6	4.4	mΩ
		V_{GS}=10V, I_D=60A	-	2.5	3.2	
Gate resistance[2]	R_G	-	-	1.2	-	Ω

Downloaded from Arrow.com.

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Dynamic characteristics[2]						
Input capacitance	C_{iss}	V_{GS}=0V, V_{DS}=30V, f=1MHz	-	2941	3823	pF
Output capacitance	C_{oss}		-	557	725	
Reverse transfer capacitance	C_{rss}		-	24	36	
Turn-on delay time	$t_{d(on)}$	V_{DD}=30V, V_{GS}=10V, I_D=60A, $R_{G,ext}$=3.5Ω	-	3.6	-	ns
Turn-off delay time	$t_{d(off)}$		-	20.0	-	
Rise time	t_r		-	1.0	-	
Fall time	t_f		-	8.0	-	
Gate Charge Characteristics[2]						
Gate to source charge	Q_{gs}	V_{DD}=30V, I_D=60A, V_{GS}=0 to 10V	-	9.5	12.4	nC
Gate to drain charge	Q_{gd}		-	6.1	9.2	
Gate charge total	Q_g		-	39.6	51.5	
Gate plateau voltage	$V_{plateau}$		-	3.2	-	V
Reverse Diode						
Diode continous forward current[2]	I_S	T_C=25°C	-	-	120	A
Diode pulse current[2]	$I_{S,pulse}$	T_C=25 °C, t_p= 100 µs	-	-	364	
Diode forward voltage	V_{SD}	V_{GS}=0V, I_F=60A, T_j=25°C	-	0.8	1.1	V
Reverse recovery time[2]	t_{rr}	V_R=30V, I_F=50A, di_F/dt=100A/µs	-	40	-	ns
Reverse recovery charge[2]	Q_{rr}		-	38	-	nC

[1] Practically the current is limited by the overall system design including the customer-specific PCB.

[2] The parameter is not subject to production test - verified by design/characterization.


[3] The product can operate at a specified current based on best practice to minimze electromigration at the solder joint. For rare events and inrush currents, the value may be exceeded.

[4] Device on a four-layer 2s2p FR4 PCB defined in accordance with JEDEC standards (JESD51-5-7). PCB is vertical in still air.

Downloaded from Arrow.com.


1 Power dissipation

$P_{tot} = f(T_C)$; $V_{GS} = 10$ V

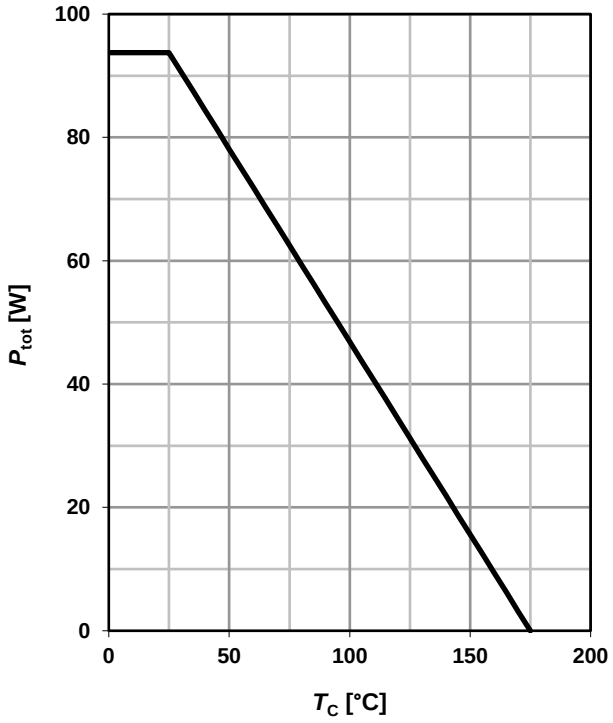

2 Drain current


$I_D = f(T_C)$; $V_{GS} = 10$ V

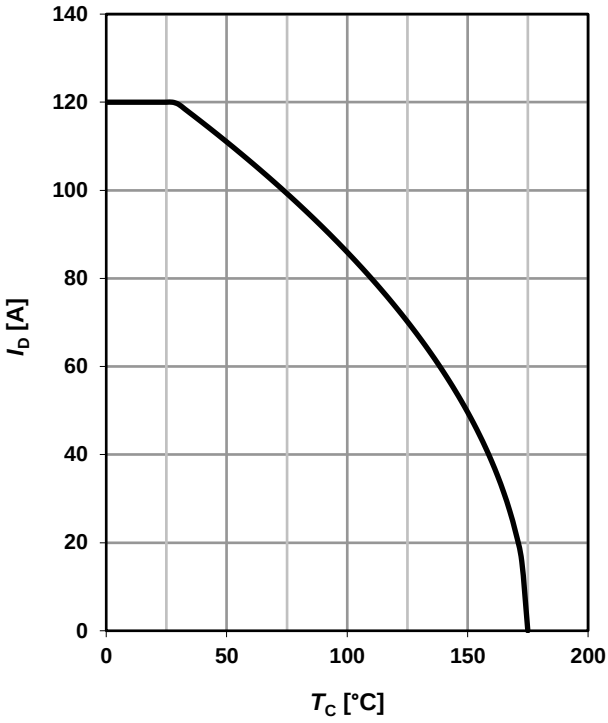

3 Safe operating area

$I_D = f(V_{DS})$; $T_C = 25$ °C; $D = 0$


parameter: t_p

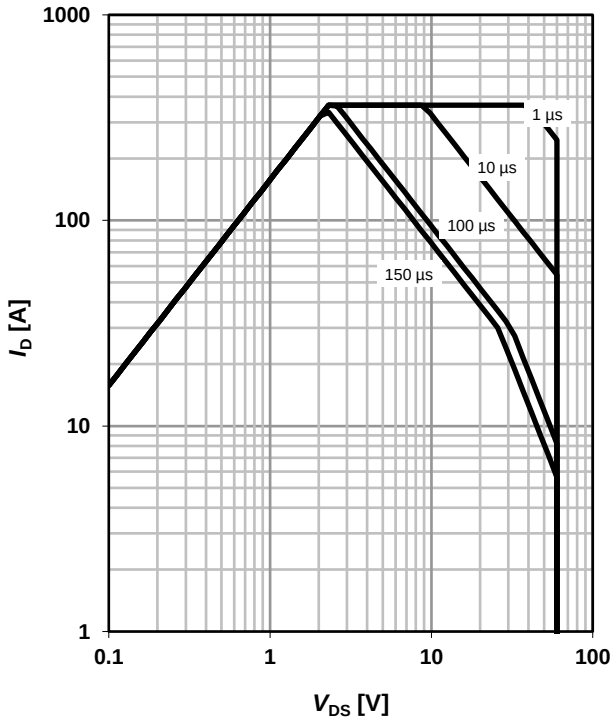

4 Max. transient thermal impedance

$Z_{thJC} = f(t_p)$

parameter: $D = t_p/T$

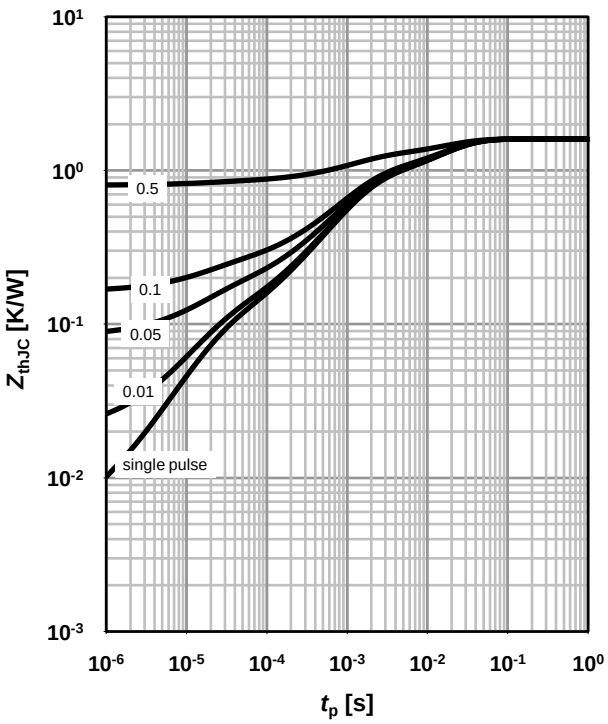


Downloaded from Arrow.com.

5 Typ. output characteristics

$I_D = f(V_{DS})$; $T_j = 25$ °C


parameter: V_{GS}

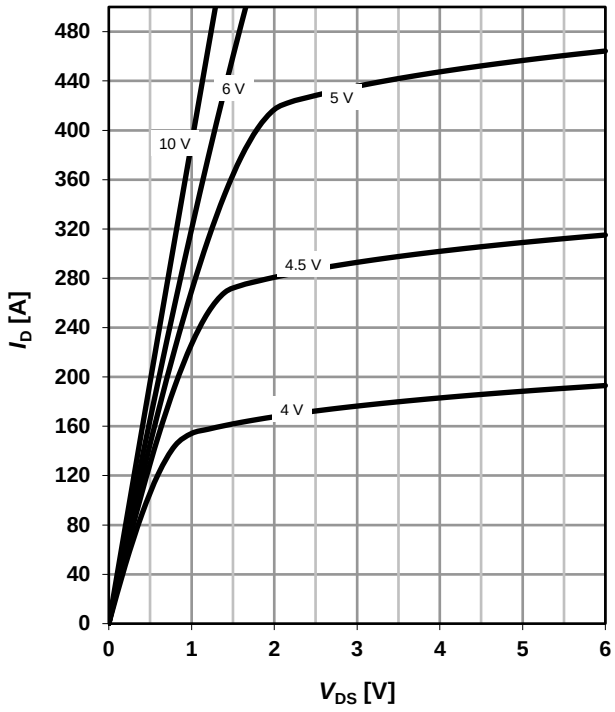

6 Typ. drain-source on-state resistance

$R_{DS(on)} = f(I_D)$; $T_j = 25$ °C


parameter: V_{GS}

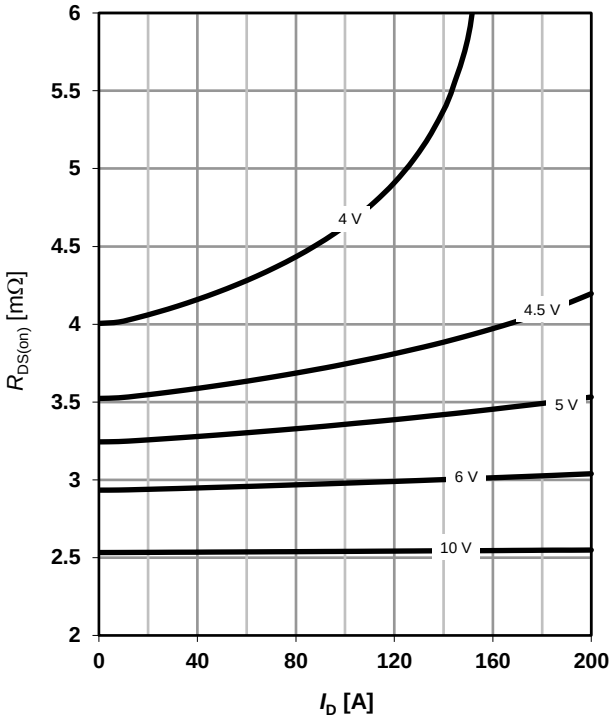

7 Typ. transfer characteristics

$I_D = f(V_{GS})$; $V_{DS} = 6$V


parameter: T_j

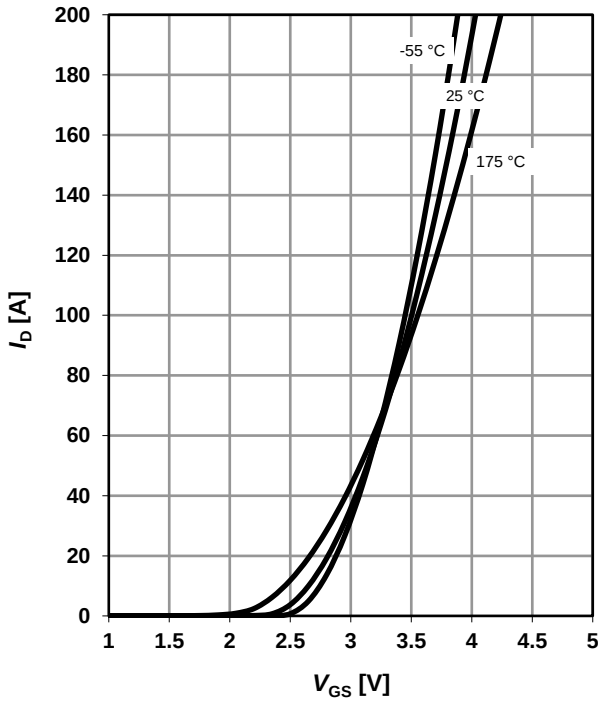

8 Typ. drain-source on-state resistance

$R_{DS(on)} = f(T_j)$;

parameter: I_D, V_{GS}

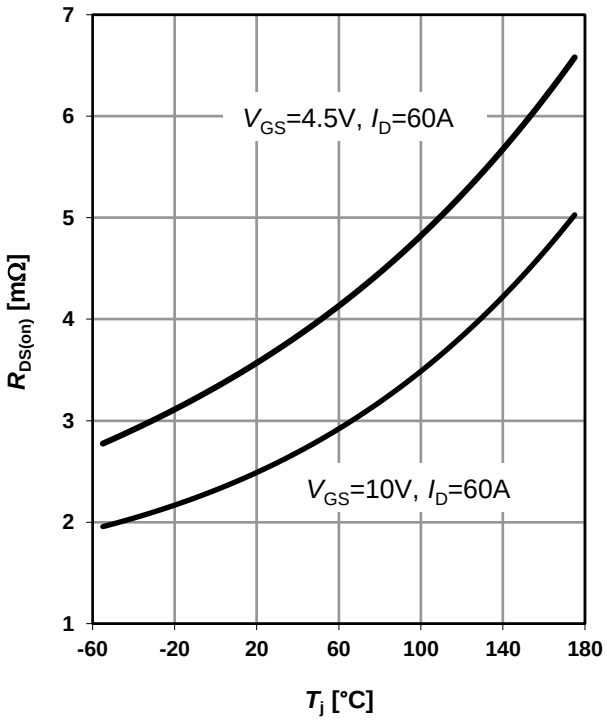


Downloaded from Arrow.com.

9 Typ. gate threshold voltage


$V_{GS(th)} = f(T_j)$; $V_{GS} = V_{DS}$

parameter: I_D

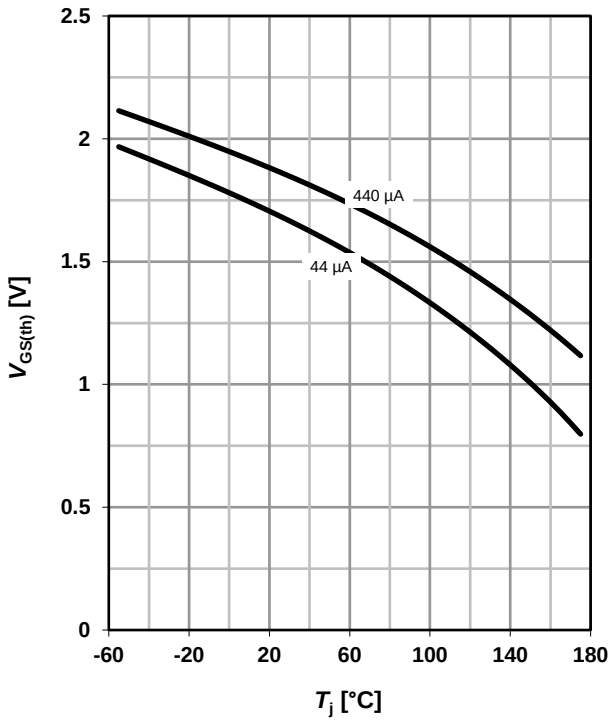

10 Typ. capacitances


$C = f(V_{DS})$; $V_{GS} = 0$ V; $f = 1$ MHz

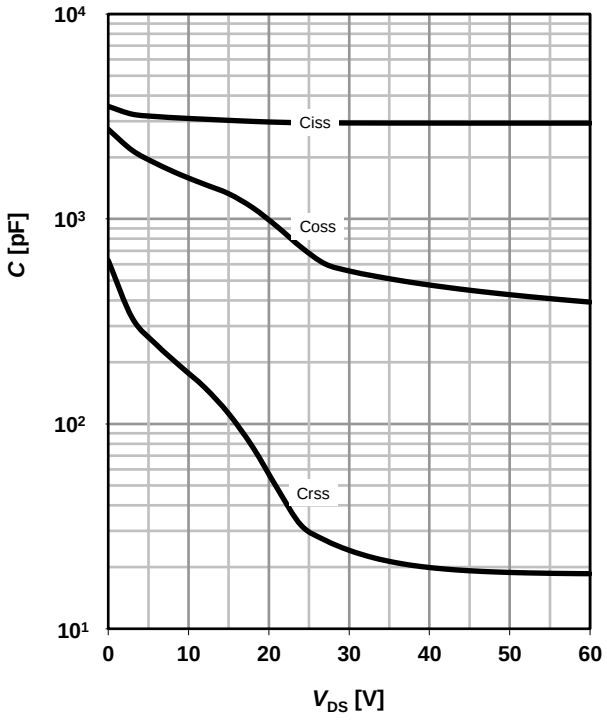

11 Typical forward diode characteristics

$I_F = f(V_{SD})$


parameter: T_j

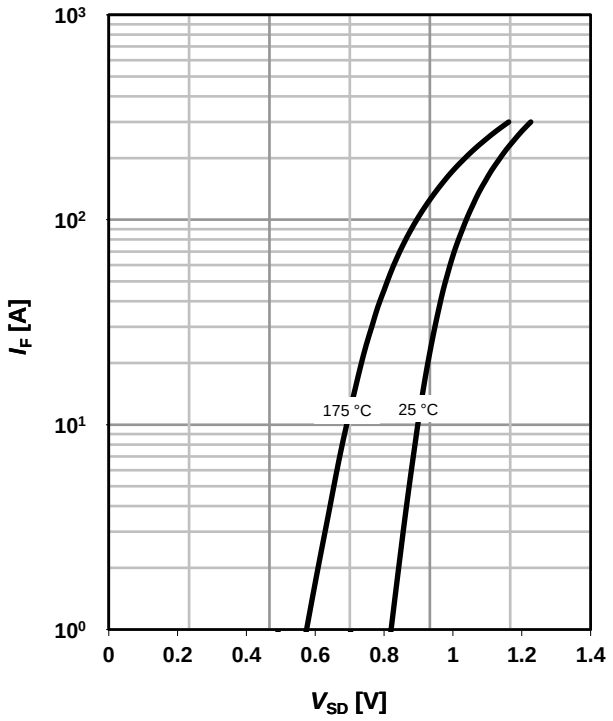

12 Avalanche characteristics

$I_{AS} = f(t_{AV})$

parameter: $T_{j(start)}$

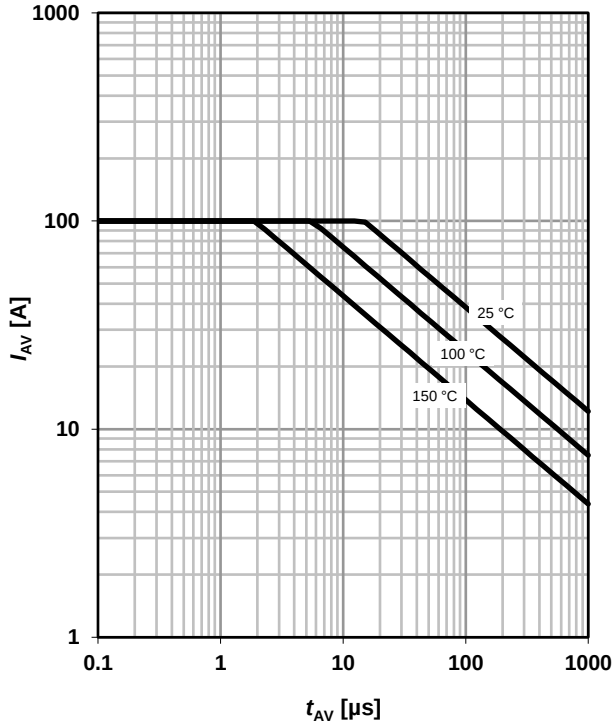


Downloaded from Arrow.com.

13 Avalanche energy


$E_{AS} = f(T_j)$

parameter: I_D

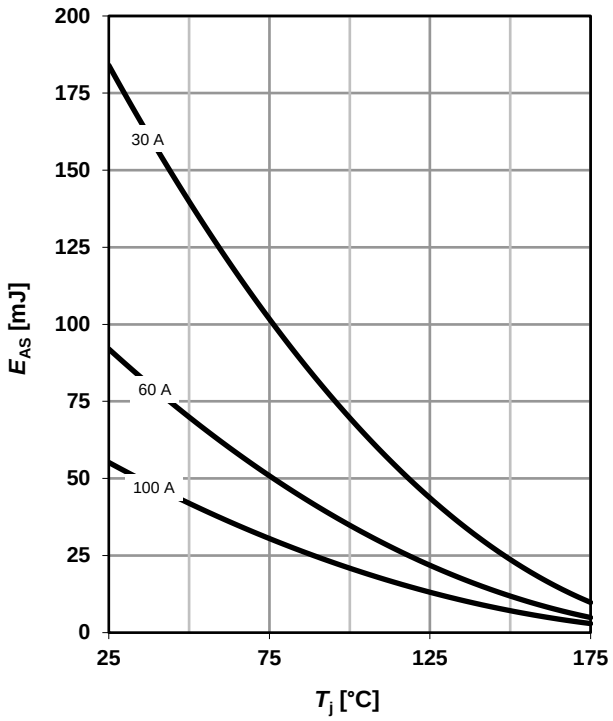

14 Drain-source breakdown voltage


$V_{BR(DSS)} = f(T_j)$; $I_D = 1$ mA

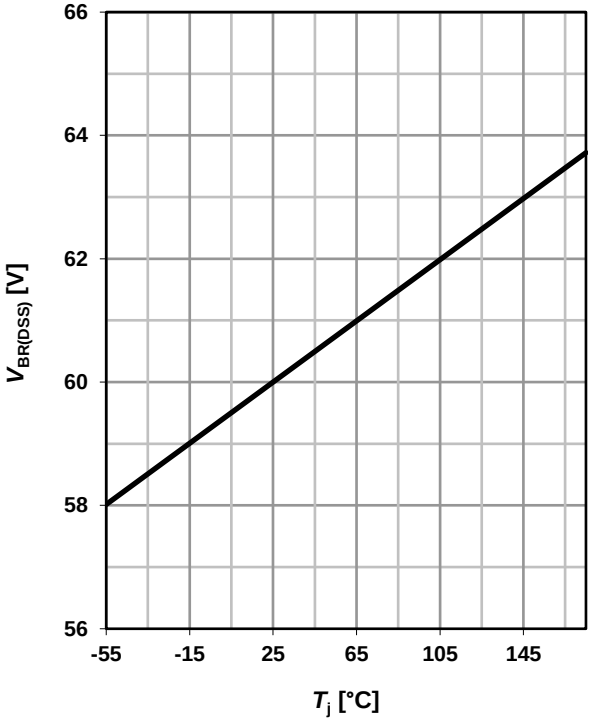


15 Typ. gate charge

$V_{GS} = f(Q_{gate})$; $I_D = 60$ A pulsed

parameter: V_{DD}

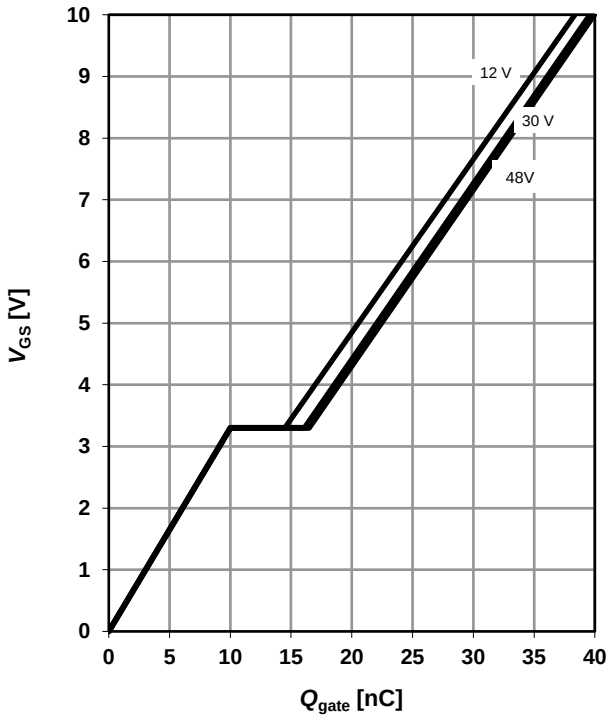


16 Gate charge waveforms

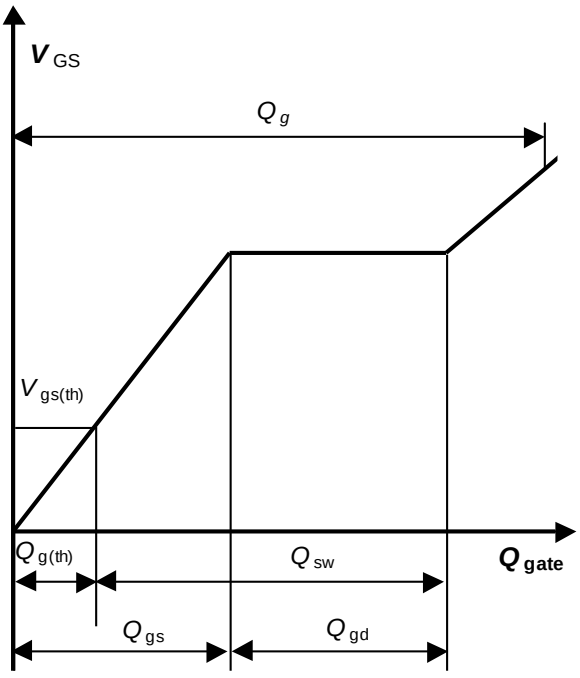


Downloaded from Arrow.com.

Package Outline

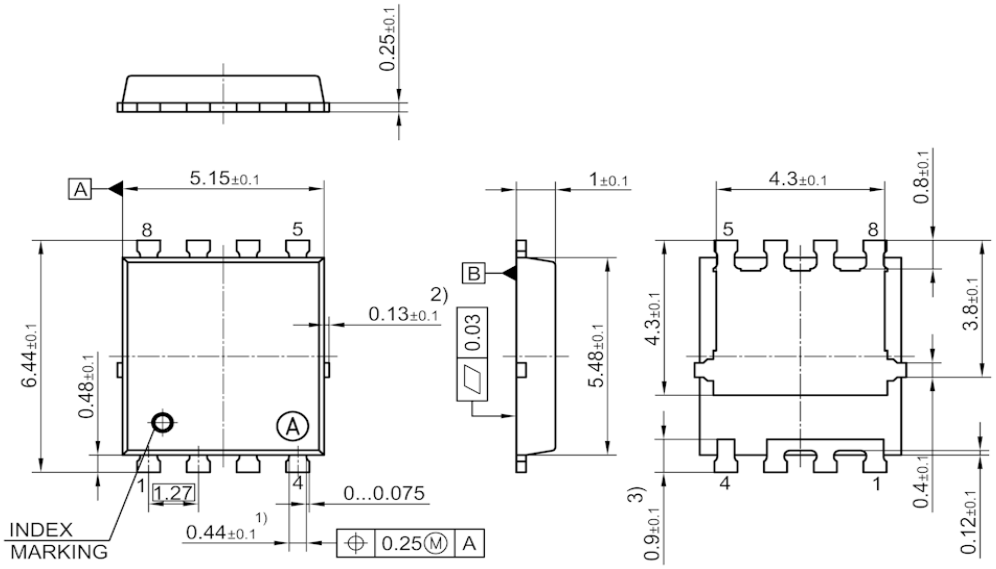

1) EXCLUDE MOLD FLASH
2) REMOVAL ON MOLD GATE, INTRUSION 0.1MM AND PROTRUSION 0.1MM
3) LEAD LENGTH UP TO ANTI FLASH LINE
4)ALL METAL SURFACE ARE PLATED, EXCEPT AREA OF CUT
ALL DIMENSIONS ARE IN UNITS MM
THE DRAWING IS IN COMPLIANCE WITH ISO 128 & PROJECTION METHOD 1 [ ]


Footprint

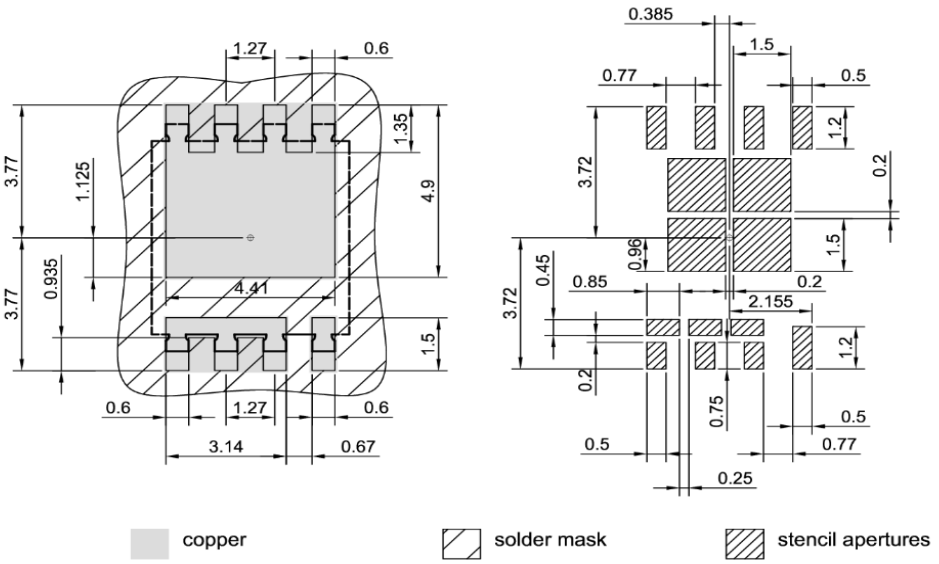

copper solder mask stencil apertures

All dimensions are in units mm

Packaging

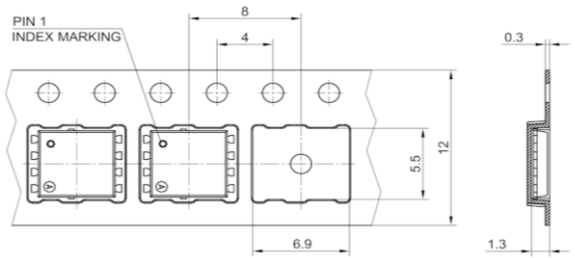

Downloaded from Arrow.com.

Published by
Infineon Technologies AG
81726 Munich, Germany

© Infineon Technologies AG 2020
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances.
For information on the types in question, please contact the nearest Infineon Technologies Office.
Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life.
If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Downloaded from Arrow.com.

Revision History

Version	Date	Changes
Revision 1.0	05.05.2020	Final Data Sheet

Downloaded from Arrow.com.