RV1S9213A

R08DS0187EJ0100
Rev.1.00
Nov 11,2019

1 Mbps, OPEN COLLECTOR OUTPUT, HIGH CMR, IPM DRIVER,
5-PIN SSOP WITH 8.2mm CREEPAGE DISTANCE (LSSO5) PHOTOCOUPLER


DESCRIPTION

The RV1S9213A is an optically coupled isolator containing an AlGaAs LED on the input side and a photo diode and a signal processing circuit on the output side on one chip. The RV1S9213A is designed specifically for high common mode transient immunity (CMR) and low pulse width distortion with operating temperature. It is suitable for IPM drive. This package is very small and thin with long creepage distance(8.2mm).
This small product is suitable for various interface circuits which require surface mounting and high-density mounting.

FEATURES

- Small and long creepage (8.2 mm, LSSO5)
- Open collector output
- High speed switching (t_{PHL} = 500ns Max., t_{PLH} = 750ns MAX.)
- Propagation Delay Difference ($t_{PLH} - t_{PHL}$ = 270 ns TYP.)
- Operating temperature （-40 ~ +125°C）
- High common mode transient immunity (CM_H, CM_L = ±50 kV/μs MIN.）
- High isolation voltage (BV = 5000 Vr.m.s.）
- Embossed tape product ：RV1S9213ACCSP-10Yx#KC0: 3500 pcs/reel
- Pb-Free product
- Safety standard
  - UL ：UL1577, Double protection
  - CSA ：CAN/CSA-C22.2 No.62368-1, Reinforced insulation
  - VDE ：DIN EN 60747-5-5 (Option)

PIN CONNECTION
(Top View)



1. Anode
2. Cathode
3. GND
4. V_O
5. V_{CC}


APPLICATIONS

- Robot controller
- Industrial inverter
- AC Servo
- FA Network
- Measurement equipment

Start of mass production
Nov.2019

Downloaded from Arrow.com.

PACKAGE DIMENSIONS (UNIT : mm)

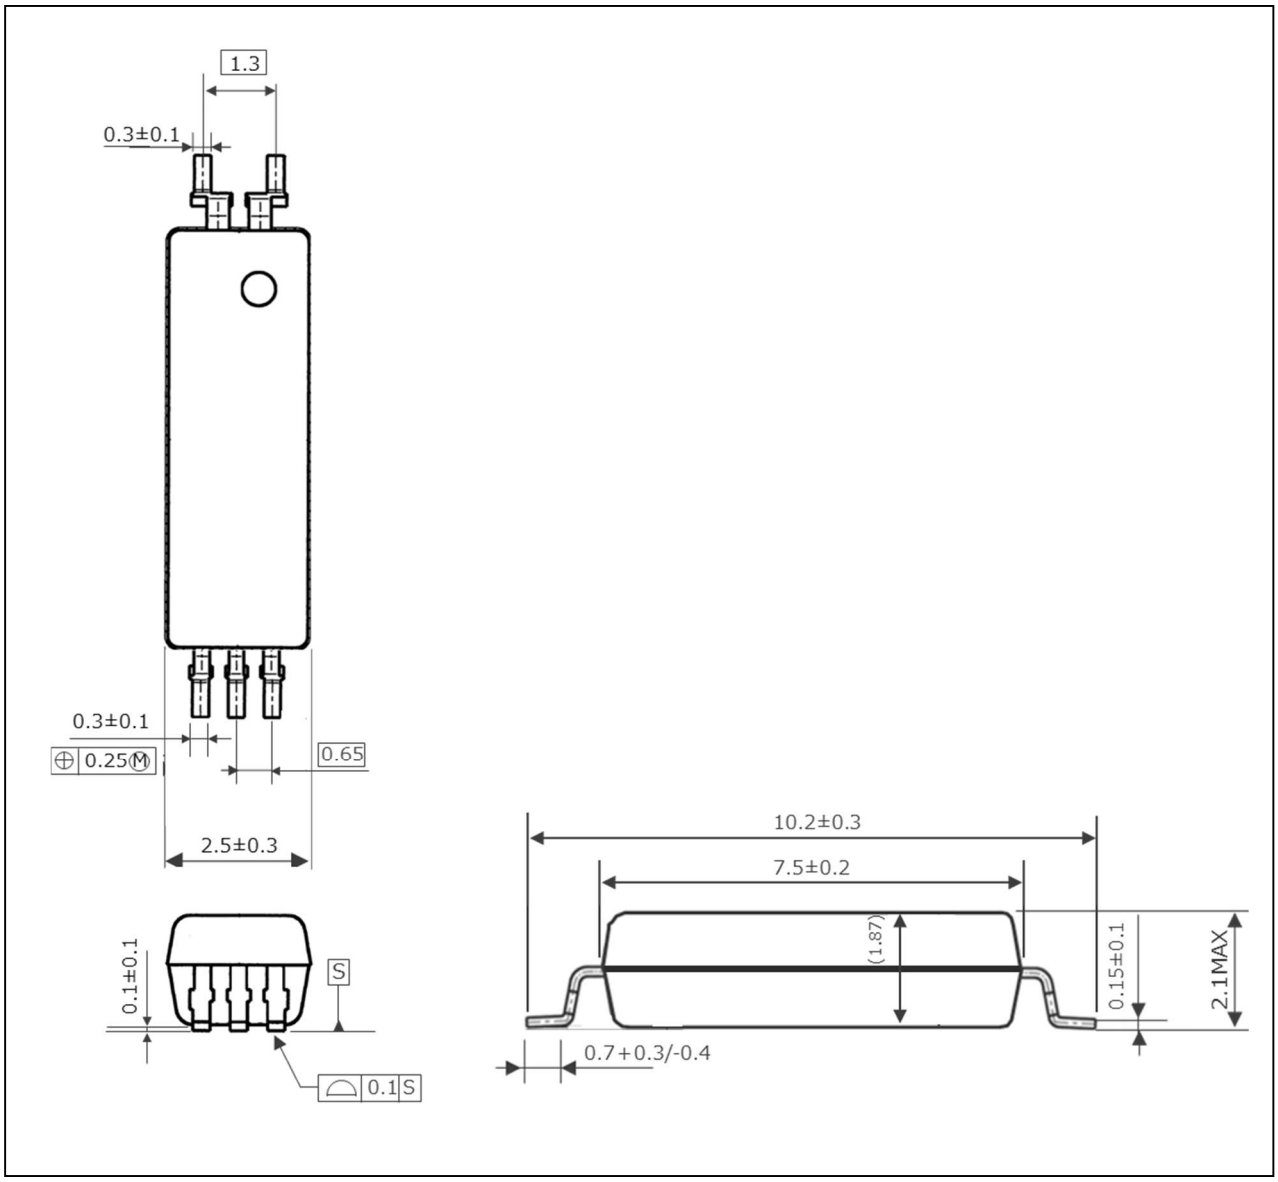


Weight :0.075g（Typ.）

PHOTOCOUPLER CONSTRUCTION

Parameter	MIN.
Air Distance	8.2 mm
Creepage Distance	8.2 mm
Isolation Distance	0.15 mm


Downloaded from Arrow.com.

BLOCK DIAGRAM

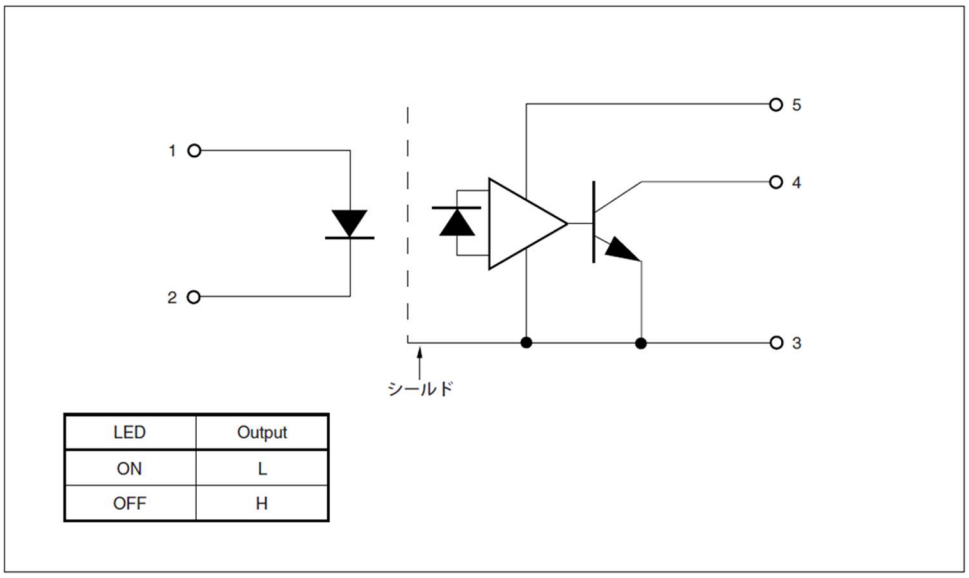

LED	Output
ON	L
OFF	H

MARKING EXAMPLE

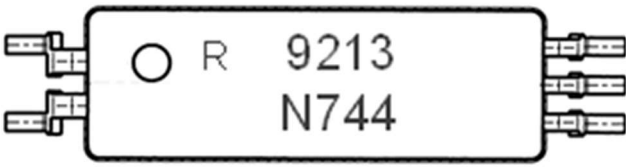

R		An initial of "Renesas"	
9213		Product Part Number＊	
○		No.1 pin Mark	
N744	N	Rank Code	
	744	Assembly Lot	
		7	Last one-digit of Assembly Year
		44	Weekly Serial Code

＊）Applicable type numbers listed below

RV1S 9213 ACCSP-10Yx

Marking type number. ”RV1S” and “ACCSP-10Yx” ” are omitted from original type number

ORDERING INFORMATION

Part Number	Order Number	Solder Plating Specification	Packing Style	Safety Standard Approval	Application Part Number*1
RV1S9213ACCSP-10YC	RV1S9213ACCSP-10YC#SC0	Pb-Free and Halogen Free (Ni/Pd/Au)	20 pcs(Tape 20 pcs cut)	Standard products (UL, CSA approved)	RV1S9213A
	RV1S9213ACCSP-10YC#KC0		Embossed Tape 3500 pcs/reel		
RV1S9213ACCSP-10YV	RV1S9213ACCSP-10YV#SC0		20 pcs(Tape 20 pcs cut)	UL, CSA, DIN EN 60747-5-5 approved	
	RV1S9213ACCSP-10YV#KC0		Embossed Tape 3500 pcs/reel		

Notes:*1. For the application of the Safety Standard, following part number should be used.

Downloaded from Arrow.com.

ABSOLUTELY MAXIMUM RATINGS (T_A =25°C, unless otherwise specified)

Parameter		Symbol	Ratings	Unit
Diode	Forward Current	I_F	20	mA
	Reverse Voltage	V_R	5	V
	Power Dissipation Derating	ΔP_D/℃	1.2（T_A≧110℃）	mW/℃
	Power Dissipation	P_D	45	mW
Detector	Supply Voltage	V_{CC}	-0.5 ~ +30	V
	Output Voltage	V_O	-0.5 ~ V_{CC}	V
	Output Current	I_O	15	mA
	Power Dissipation Derating	ΔP_C/℃	4.15（T_A≧85℃）	mW/℃
	Power Dissipation	P_C	250	mW
Isolation Voltage *1		BV	5000	Vr.m.s.
Operating Ambient Temperature		T_A	-40 ~ +125	°C
Storage Temperature		T_{stg}	-55 ~ +150	°C

Notes: 1. AC Voltage for 1minite at T_A=25°C, RH=60% between input and output.
Pins 1-2 shorted together, 3-5 shorted together.

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	MIN.	TYP.	MAX	Unit
Supply Voltage	V_{CC}	4.5	15	25	V
High Level Forward Current	$I_{F(ON)}$	8	10	12	mA
Low Level forward voltage	$V_{F(OFF)}$	-2		0.8	V

Downloaded from Arrow.com.


ELECTRICAL CHARACTERISTICS

(T_A = -40 ~ +125°C, VCC = 15V, unless otherwise specified)

Parameter		Symbol	Conditions	MIN.	TYP.*1	MAX.	Unit
Diode	Forward Voltage	V_F	I_F = 10 mA, T_A = 25°C	1.35	1.56	1.75	V
	Reverse Current	I_R	V_R = 3 V, T_A = 25°C			10	μA
	Terminal Capacitance	C_t	V_F = 0 V, f = 1 MHz		30		pF
Detector	High Level Supply Current	I_{CCH}	V_{CC} = 20V, V_F = 0.8V, V_O = Open		1.0	1.3	mA
	Low Level Supply Current	I_{CCL}	V_{CC} = 20V, I_F =10mA, V_O = Open		1.0	1.3	mA
	High Level Output Current	I_{OH}	V_{CC} =20V, V_F =0.8V		0.01	50	μA
	Low Level Output Voltage	V_{OL}	V_{CC} = 15V, I_F =10mA, I_{OL} = 2.4mA		0.13	0.6	V
Coupled	Threshold Input Current	I_{FHL}	V_{CC} = 15V, V_O = 0.8V, I_O = 0.75mA		0.8	5.0	mA
	Isolation Resistance	R_{I-O}	V_{I-O} = 1kVDC	10^{11}			Ω
	Isolation Capacitance	C_{I-O}	V = 0V, f = 1MHz		0.7		pF
	Propagation Delay Time (H → L)*2	t_{PHL}	V_{CC} = 15V, I_F =10mA, R_L =20kΩ, C_L = 100pF		180	500	ns
	Propagation Delay Time (L → H)*2	t_{PLH}	V_{THHL} = 1.5V, V_{THLH} = 2.0V		420	750	ns
	Propagation Delay Difference	t_{PLH}-t_{PHL}		-200	240	650	ns
	Pulse Width Distortion (PWD)*2	$\|t_{PHL}-t_{PLH}\|$			240	650	ns
	Common Mode Transient Immunity at High Level Output*3	CM_H	T_A = 25°C, I_F = 0mA, V_{CM} = 1.5kV, R_L=20kΩ C_L = 100pF, V_O >3.0V	50			kV/μs
	Common Mode Transient Immunity at Low Level Output*3	CM_L	T_A = 25°C, I_F =10mA, V_{CM} = 1.5kV, R_L=20kΩ C_L =100pF, V_O<1.0V	50			kV/μs


Notes*: 1. Typical values at T_A = 25°C.

2. Test circuit for propagation delay time

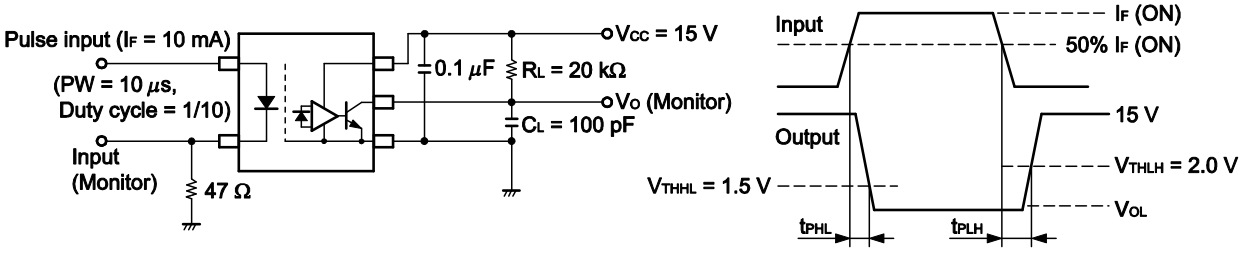

CL includes probe and stray wiring capacitance.

3. Test circuit for common mode transient immunity

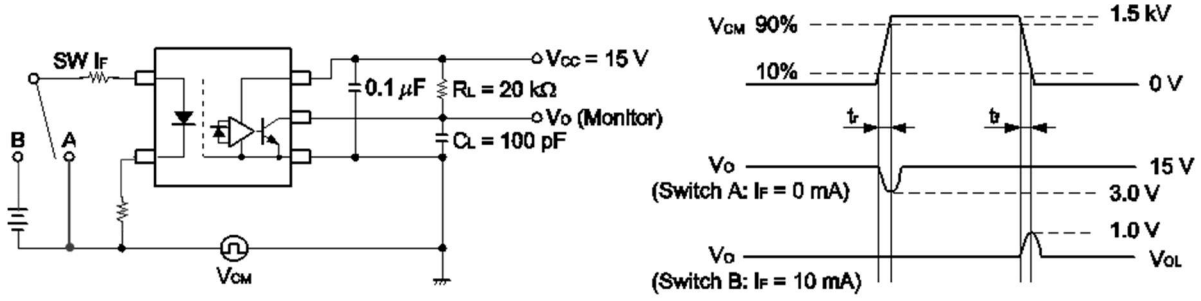

CL includes probe and stray wiring capacitance.

Downloaded from Arrow.com.


USAGE CAUTIONS

1. This product is weak for static electricity by designed with high-speed integrated circuit so protect against static electricity when handling.
2. By-pass capacitor of more than 0.1 μF is used between V_{CC} and GND near device. Also, ensure that the distance between the leads of the photocoupler and capacitor is no more than 10 mm.
3. Avoid storage at a high temperature and high humidity.


Downloaded from Arrow.com.

TYPICAL CHARACTERISTICS (T_A = 25°C, unless otherwise specified)


DIODE POWER DISSIPATION vs. AMBIENT TEMPERATURE

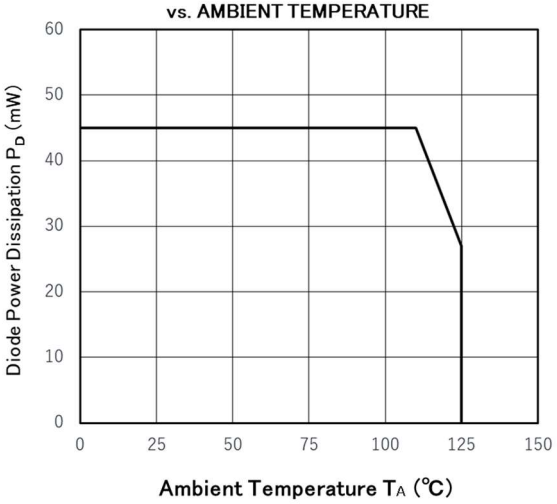


DETECTOR POWER DISSIPATION vs. AMBIENT TEMPERATURE

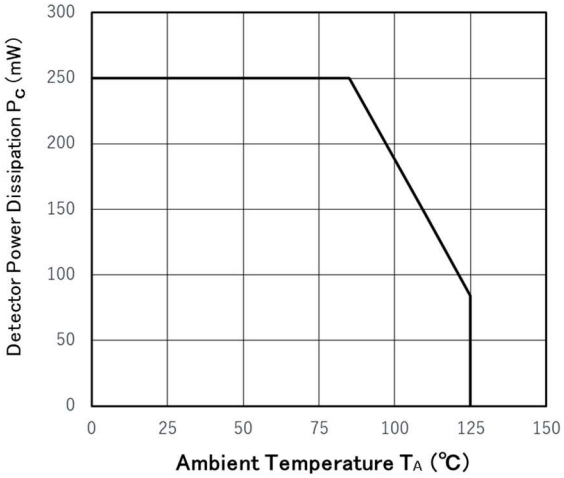


FORWARD CURRENT vs. FORWARD VOLTAGE

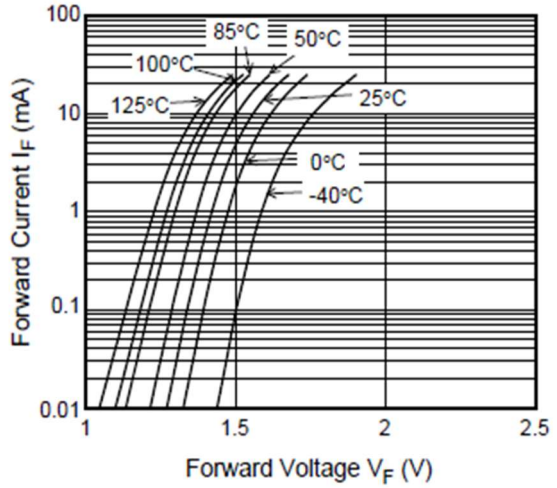


SUPPLY CURRENT vs. AMBIENT TEMPERATURE

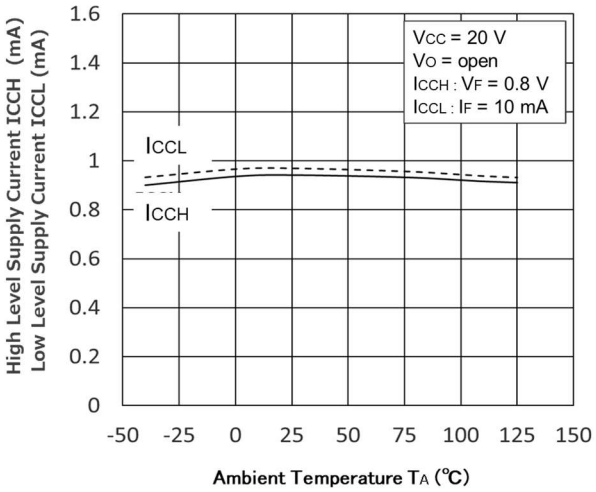

THRESHOLD INPUT CURRENT vs. AMBIENT TEMPERATURE

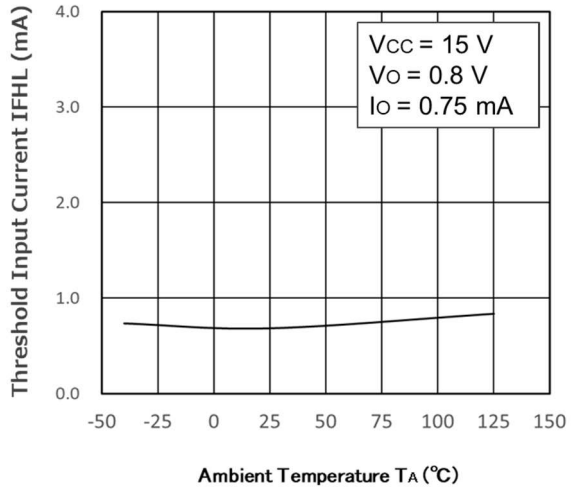

LOW LEVEL OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE

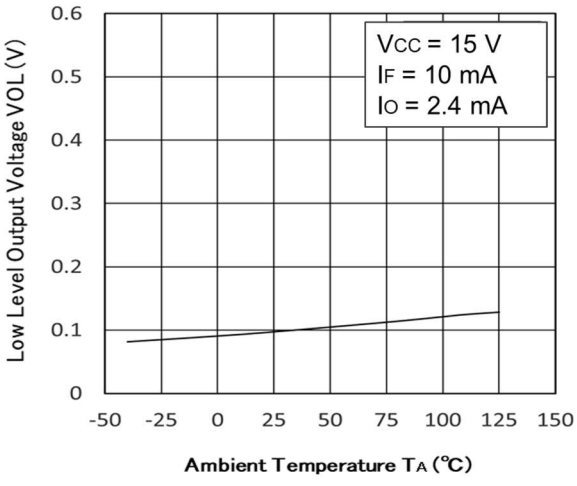


Remark The graphs indicate nominal characteristics.


Downloaded from Arrow.com.

TYPICAL CHARACTERISTICS (T_A = 25°C, unless otherwise specified)


OUTPUT CURRENT vs. FORWARD CURRENT

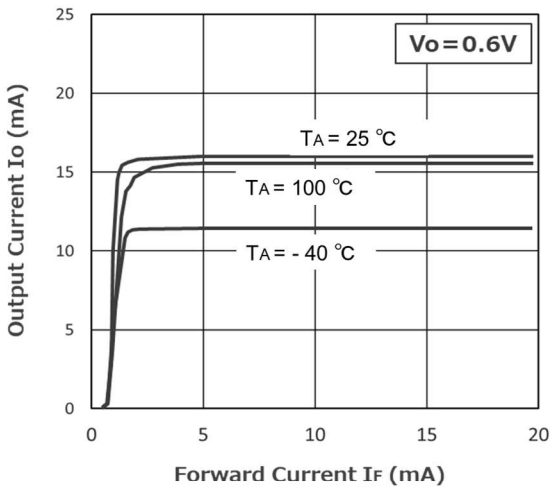


PROPAGATION DELAY TIME, MAXIMUM PROPAGATION DELAYS vs. FORWARD CURRENT

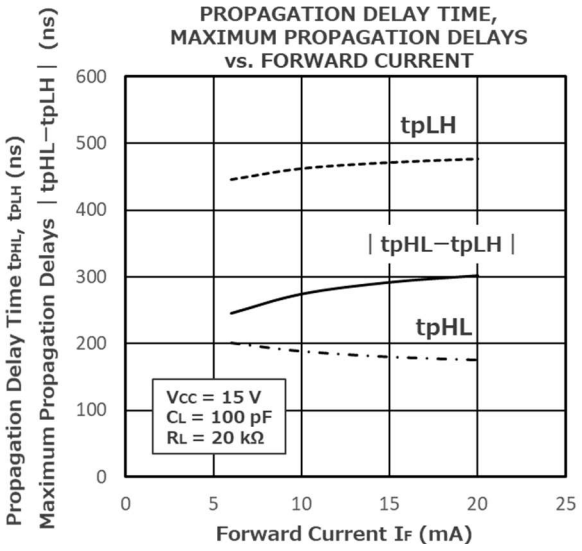


PROPAGATION DELAY TIME, MAXIMUM PROPAGATION DELAYS vs. SUPPLY VOLTAGE

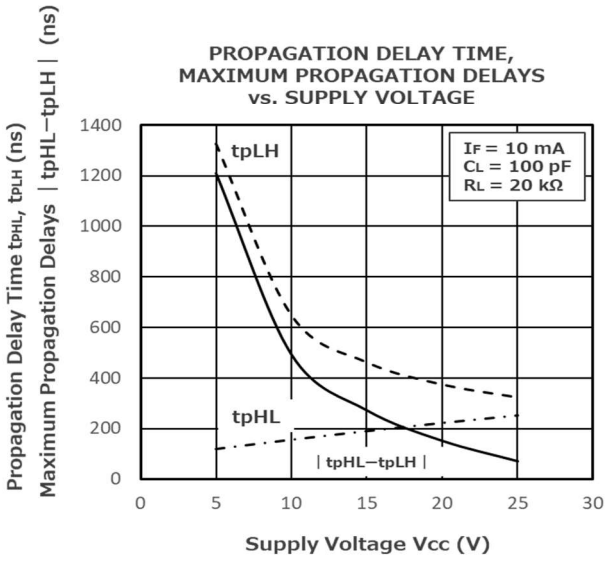


PROPAGATION DELAY TIME, PULSE WIDTH DISTORTION vs. AMBIENT TEMPERATURE

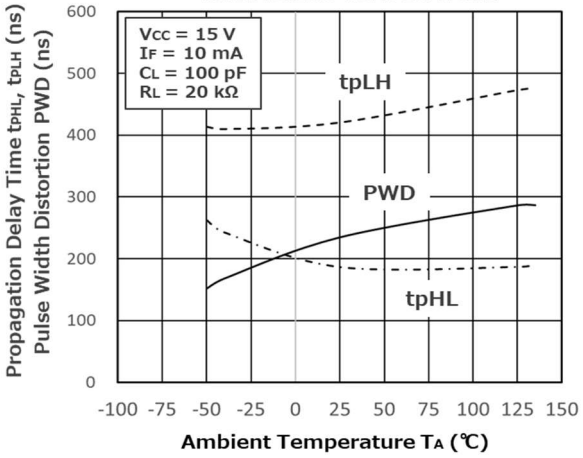

PROPAGATION DELAY TIME vs. LOAD CAPACITANCE

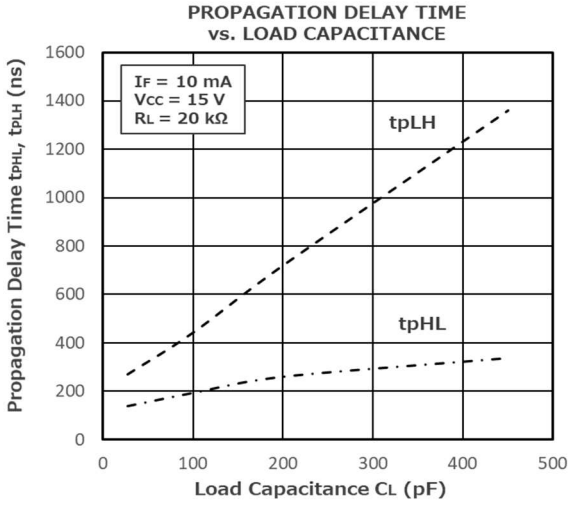


PROPAGATION DELAY TIME, MAXIMUM PROPAGATION DELAYS vs. LOAD RESISTANCE

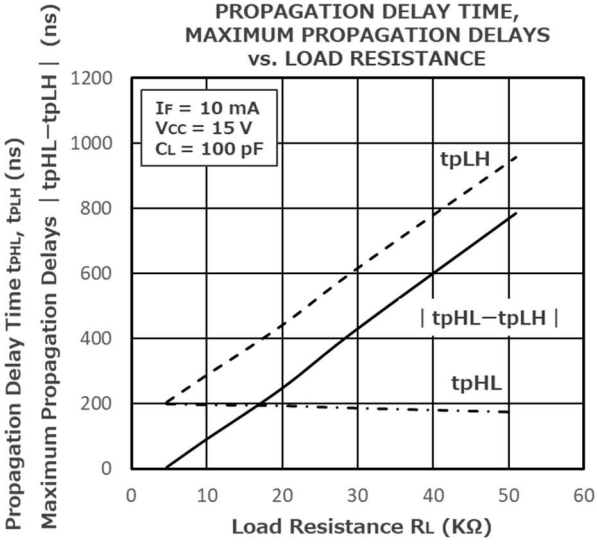

Remark The graphs indicate nominal characteristics.

Downloaded from Arrow.com.

TYPICAL CHARACTERISTICS (T_A = 25°C, unless otherwise specified)

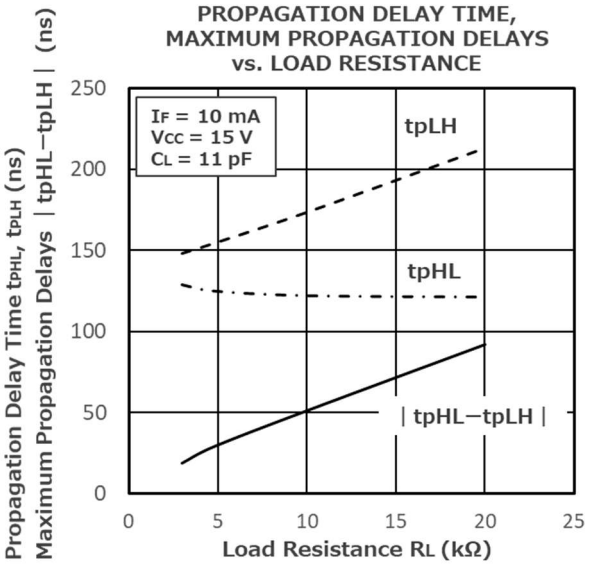


Remark The graphs indicate nominal characteristics.

Downloaded from Arrow.com.


TAPING SPECIFICATIONS (UNIT : mm)

Taping Direction




Outline and Dimensions (Tape)

Unit: mm

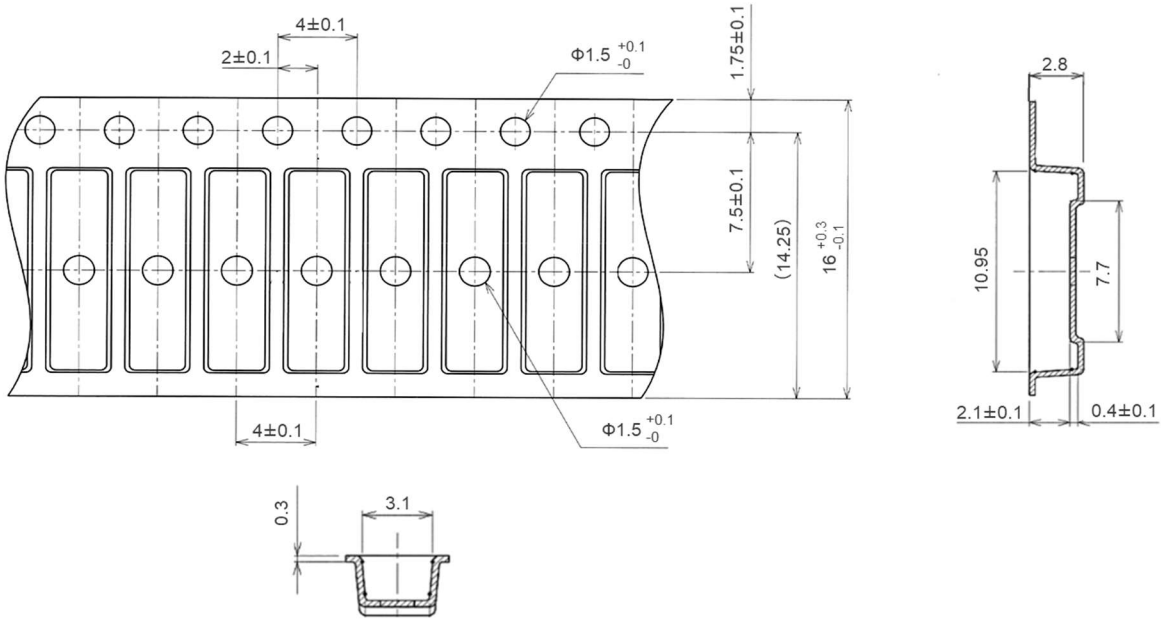

Outline and Dimensions (Reel)


Unit: mm

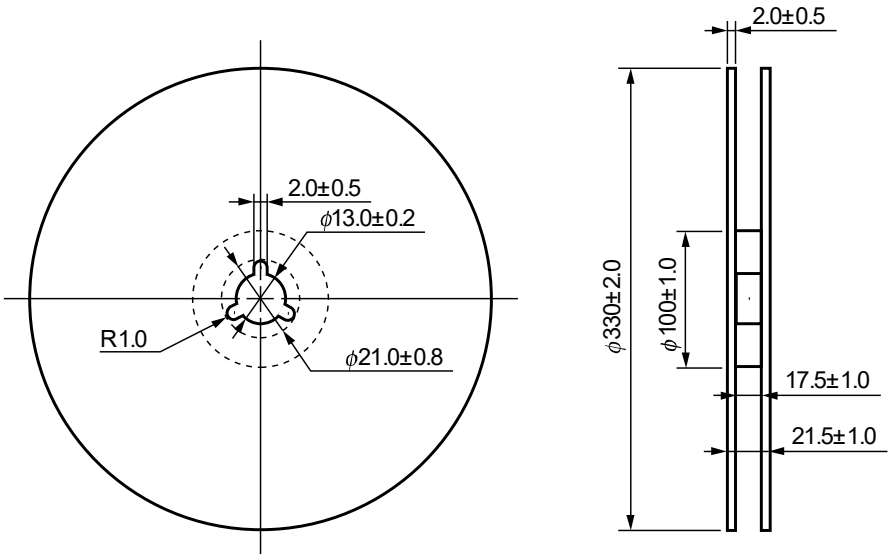

Packing: 3 500 pcs/reel

Downloaded from Arrow.com.

RECOMMENDED MOUNT PAD DIMENSIONS (UNIT : mm)

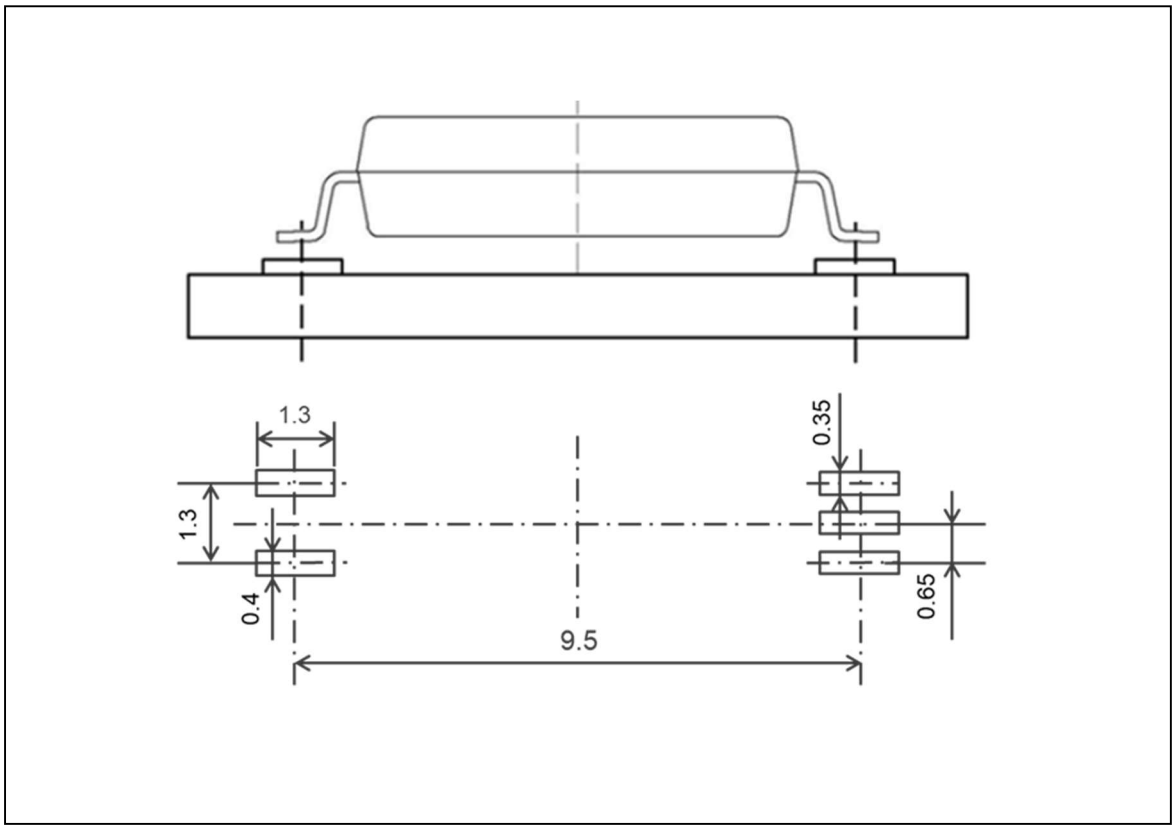

Remark All dimensions in this figure must be evaluated before use.

Downloaded from Arrow.com.


NOTES ON HANDLING

1. Recommended soldering conditions

(1) Infrared reflow soldering

- Peak reflow temperature 260°C or below (package surface temperature)
- Time of peak reflow temperature 10 seconds or less
- Time of temperature higher than 220°C 60 seconds or less
- Time to preheat temperature from 120 to 180°C 120±30 s
- Number of reflows Three
- Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

Recommended Temperature Profile of Infrared Reflow

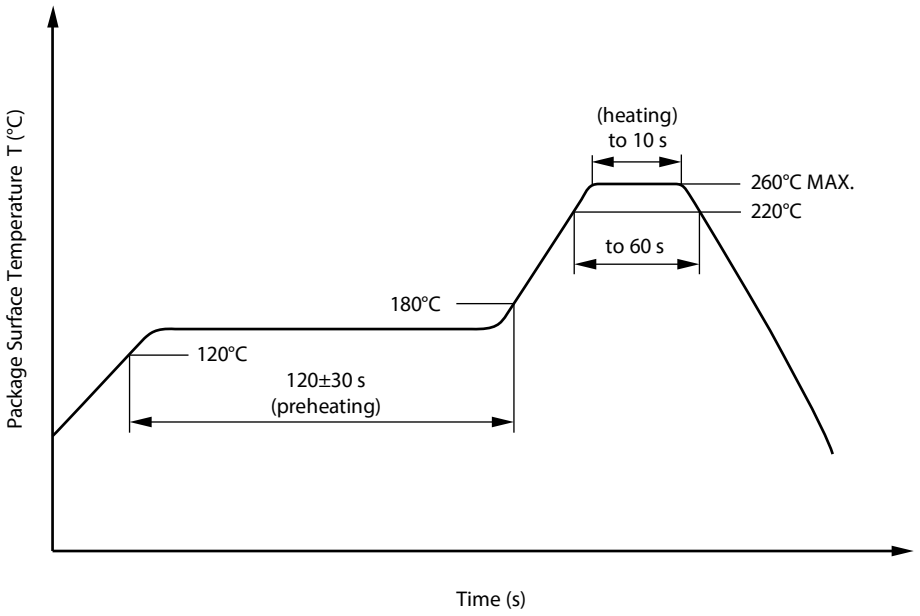

(2) Wave soldering

- Temperature 260°C or below (molten solder temperature)
- Time 10 seconds or less
- Preheating conditions 120°C or below (package surface temperature)
- Number of times One (Allowed to be dipped in solder including plastic mold portion.)
- Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

(3) Soldering by Soldering Iron

- Peak Temperature (lead part temperature) 350°C or below
- Time (each pins) 3 seconds or less
- Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

(a) Soldering of leads should be made at the point 1.5 to 2.0 mm from the root of the lead

(b) Please be sure that the temperature of the package would not be heated over 100°C

(4) Cautions

- Flux Cleaning

  Avoid cleaning with Freon based or halogen-based (chlorinated etc.) solvents.
- Do not use fixing agents or coatings containing halogen-based substances.

2. Cautions regarding noise


Be aware that when voltage is applied suddenly between the photocoupler's input and output at startup, the output transistor may enter the on state, even if the voltage is within the absolute maximum ratings.

Downloaded from Arrow.com.

SPECIFICATION OF VDE MARKS LICENSE DOCUMENT

Parameter	Symbol	Rating	Unit
Climatic test class (IEC 60068-1/DIN EN 60068-1)		40/125/21	
Dielectric strength maximum operating isolation voltage Test voltage (partial discharge test, procedure a for type test and random test) U_{pr} = 1.6 × $U_{IORM.}$, P_d < 5 pC	 U_{IORM} U_{pr}	 1 075 1 720	 V_{peak} V_{peak}
Test voltage (partial discharge test, procedure b for all devices) U_{pr} = 1.875 × $U_{IORM.}$, P_d < 5 pC	U_{pr}	2 016	V_{peak}
Highest permissible overvoltage	U_{IOTM}	8 000	V_{peak}
Degree of pollution (IEC 60664-1/DIN EN 60664-1 (VDE 0110-1))		2	
Comparative tracking index (IEC 60112/DIN EN 60112 (VDE 0303-11))	CTI	400	
Material group (IEC 60664-1/DIN EN 60664-1 (VDE 0110-1))		Ⅱ	
Storage temperature range	T_{stg}	−55～+150	°C
Operating temperature range	T_A	−40～+125	°C
Isolation resistance, minimum value V_{IO} = 500 V dc at T_A = 25°C V_{IO} = 500 V dc at T_A MAX. at least 100°C	 Ris MIN. Ris MIN.	 10^{12} 10^{11}	 Ω Ω
Safety maximum ratings (maximum permissible in case of fault, see thermal derating curve) Package temperature Current (input current I_F, Psi = 0) Power (output or total power dissipation) Isolation resistanceV_{IO} = 500 V dc at T_A = Tsi	 Tsi Isi Psi Ris MIN.	 175 400 700 10^9	 °C mA mW Ω


Method a) Destructive Test, Type and Sample Test

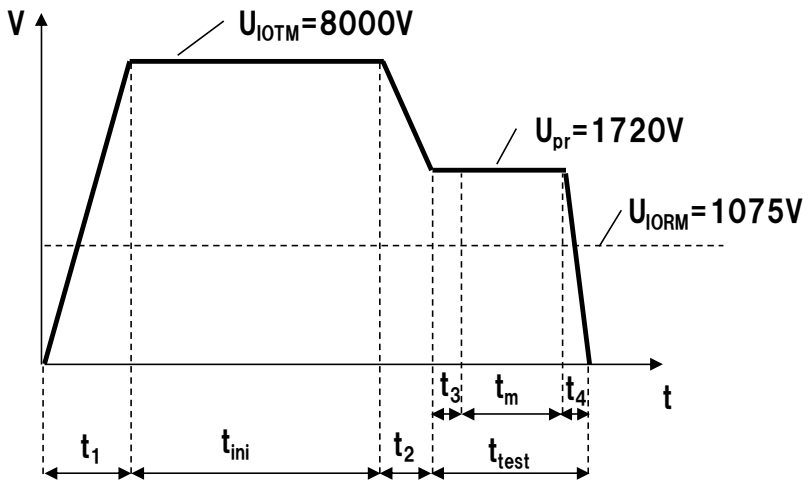

t_1,t_2=1 to 10 sec
t_3,t_4=1 sec
$t_{m\ (PARTIAL\ DISCHARGE)}$=10 sec
t_{test}=12 sec
t_{ini}=60 sec

Downloaded from Arrow.com.

Method b) Non-destructive Test, 100% Production Test

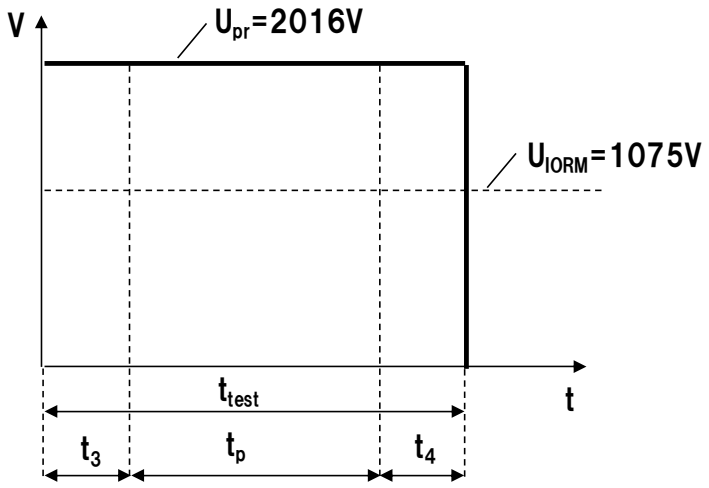

t_3,t_4=0.1 sec

$t_{p\ (PARTIAL\ DISCHARGE)}$=1.0 sec

t_{test}=1.2 sec

Downloaded from Arrow.com.

Caution GaAs Products	This product uses gallium arsenide (GaAs). GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points. • Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below. 1. Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials. 2. Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal. • Do not burn, destroy, cut, crush, or chemically dissolve the product. • Do not lick the product or in any way allow it to enter the mouth.

All trademarks and registered trademarks are the property of their respective owners.

Downloaded from Arrow.com.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: “Standard” and “High Quality”. The intended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below.

   "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.

   "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

   Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user’s manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user’s manuals, application notes, “General Notes for Handling and Using Semiconductor Devices” in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)

RENESAS

SALES OFFICES

Renesas Electronics Corporation

http://www.renesas.com

Refer to "http://www.renesas.com/" for the latest and detailed information.

Renesas Electronics Corporation
TOYOSU FORESIA, 3-2-24 Toyosu, Koto-ku, Tokyo 135-0061, Japan

Renesas Electronics America Inc.
1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.
Tel: +1-408-432-8888, Fax: +1-408-434-5351

Renesas Electronics Canada Limited
9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
Room 101-T01, Floor 1, Building 7, Yard No. 7, 8th Street, Shangdi, Haidian District, Beijing 100085, China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai 200333, China
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited
Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2265-6688, Fax: +852 2886-9022

Renesas Electronics Taiwan Co., Ltd.
13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.
Unit No 3A-1 Level 3A Tower 8 UOA Business Park, No 1 Jalan Pengaturcara U1/51A, Seksyen U1, 40150 Shah Alam, Selangor, Malaysia
Tel: +60-3-5022-1288, Fax: +60-3-5022-1290

Renesas Electronics India Pvt. Ltd.
No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India
Tel: +91-80-67208700

Renesas Electronics Korea Co., Ltd.
17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5338

© 2019 Renesas Electronics Corporation. All rights reserved.

Colophon 8.0

Downloaded from Arrow.com.