


© 2019 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	AG9	REDRAWN PER ECO-19-005708	02MAY2019	BKW	SF




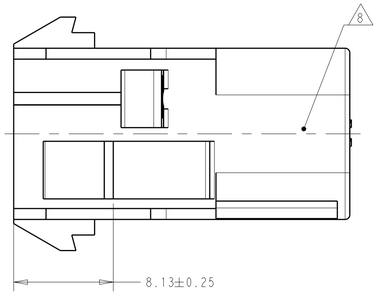




CONSTRUCTION OPTION 1

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOCK™ PLUG
2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29.
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. OPTIONAL FOR KEYING HOUSING IN PANEL.
5. CIRCUIT NUMBER 1 LOCATION.
6. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
7. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
8. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
9. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
10. CONSTRUCTION OPTION 1 ONLY ALLOWED
    CONSTRUCTION OPTIONS 2 AND 3 NOT PERMISSIBLE
11. PREPRODUCTION-FASR REQUIRED
12. MATERIAL: PA66, UL94 V-0, GWIT 775°C
13. TRADEMARK LOCATION: AMP OR TE





CONSTRUCTION OPTION 2




CONSTRUCTION OPTION 3

DETAIL A
OPTIONAL CONSTRUCTIONS

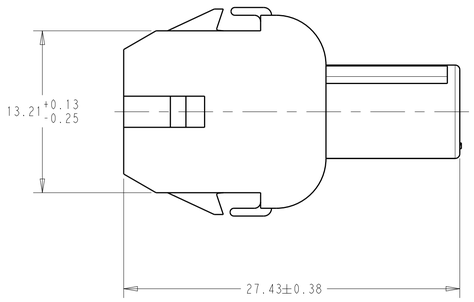

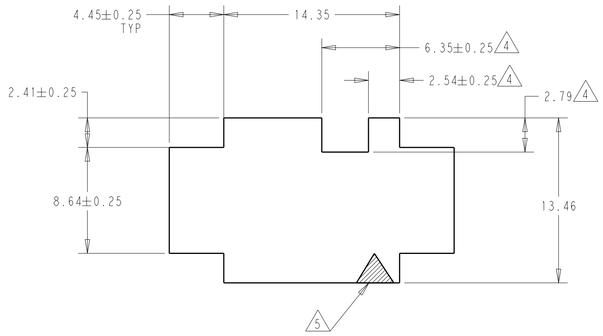

RECOMMENDED PANEL CUTOUT



12	NATURAL	3-480699-0
10	NATURAL	2-480699-0
	BLACK	1-480699-9
	GRAY	1-480699-8
	BLUE	1-480699-6
	GREEN	1-480699-5
9 SUPERSEDED BY 1-480699-0	YELLOW	1-480699-4
9 OBSOLETE	ORANGE	1-480699-3
	RED	1-480699-2
	BROWN	1-480699-1
	NATURAL	1-480699-0
	COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.13
3 PLC ±-
4 PLC ±-
ANGLES ±1°

MATERIAL: NYLON UL94V-2

FINISH: - / -

DWN B. WEAVER 02MAY2019
CHK S. FERNANDES 02MAY2019
APVD T. BENCHOFF 02MAY2019
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME CAP, 2 CIRCUIT UNIVERSAL MATE-N-LOCK
-

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-480699 | RESTRICTED TO -

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV AG9

4805 (3/13)

Downloaded from Arrow.com.