
Signal Relays (2 A or less)

TX RELAYS

2,000 Vrms dielectric strength, 2 Form C and 2 A relays

Protective construction：Sealed type

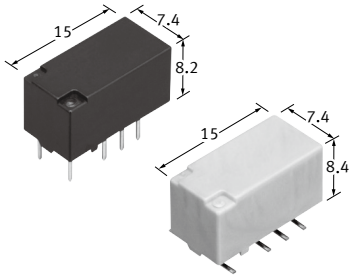

(Unit：mm)

FEATURES

- 2 types of terminal shapes:
  PC board terminal and Surface-mount terminal
- Ag+Au clad contact and AgPd contacts
  suitable for use in low level load analog circuits
- 2,000 Vrms dielectric strength
  (between contact and coil)
- Surge withstand voltage 2,500 V
  (between contact and coil)
- Surge withstand voltage 1,500 V
  (between open contacts)

TYPICAL APPLICATIONS

- Telecommunications and measurement equipment
- Medical and security equipment

ORDERING INFORMATION (PART NO. : Ordering part number for Japanese market)

ATX 2 ☐ ☐ ☐ ☐ ☐ ☐

- Contact arrangement
  2：2 Form C
- Terminal shape / Operating function
  0：Standard PC board terminal type or Surface-mount terminal
  Single side stable
  1：Standard PC board terminal type or Surface-mount terminal
  1 coil latching
  2：Standard PC board terminal type or Surface-mount terminal
  2 coil latching (L2)*5
  6：Standard PC board terminal type or Surface-mount terminal
  2 coil latching (LT)
- Rated coil voltage (DC)*1, *2
  0：1.5 V, 1：3 V, 2：6 V, 3：12 V, 4：24 V,
  5：48 V, 6：4.5 V, 7：9 V, 9：5 V
- Contact material
  Nil：Standard contact (Ag+Au clad)
  20：AgPd contact (low level load);
  AgPd+Au clad (stationary),
  AgPd (movable)
- Surface-mount type
  Nil：Standard PC board terminal type
  SA：SA type
  SS：SS type
- Packing style*3
  Nil：Tube packing
  X ：Tape and reel (picked from 1/3/4/5-pin side)
  Z ：Tape and reel packing (picked from the 8/9/10/12-pin side)
  W：Tape and reel packing (picked from the 1/3/4/5-pin side)
  With humidity indicator and silica gel in moisture proof bag*4
  Y ：Tape and reel packing (picked from the 8/9/10/12-pin side)
  With humidity indicator and silica gel in moisture proof bag*4

*1: 48 V coil type：Single side stable only.
*2: In case of 5 V transistor drive circuit, it is recommended to use 4.5 V type relay.
*3: The "W" and "Y" at the end of the part number only appears on the inner and outer packing.
It does not appear on the relay itself.
*4: Each reel is packed with humidity indicators and silica gel in the moisture proof pack.
*5: Please contact our sales representative for detailed specifications when using L2 of the operation function.

©Panasonic Industry Co., Ltd. 2026

Downloaded from Arrow.com.

ORDERING INFORMATION (TYPE NO. : Ordering part number for non Japanese market)

TX 2 □-□-□-□-□-□

- Surface-mount type
  Nil : Standard PC board terminal type
  SA : SA type
  SS : SS type
- Contact arrangement
  2 : 2 Form C
- Operating function
  Nil : Single side stable
  L : 1 coil latching
  L2 : 2 coil latching (SET = 1,6 Pin)*5
  LT : 2 coil latching (SET = 1,12 Pin)
- Rated coil voltage (DC)*1, *2
  1.5, 3, 4.5, 5, 6, 9, 12, 24, 48V
- Contact material
  Nil : Standard contact (Ag+Au clad)
  1 : AgPd contact (low level load); AgPd+Au clad (stationary), AgPd (movable)
- Packing style*3
  Nil : Tube packing
  X : Tape and reel (picked from 1/3/4/5-pin side)
  Z : Tape and reel packing (picked from the 8/9/10/12-pin side)
  W : Tape and reel packing (picked from the 1/3/4/5-pin side) With humidity indicator and silica gel in moisture proof bag*4
  Y : Tape and reel packing (picked from the 8/9/10/12-pin side) With humidity indicator and silica gel in moisture proof bag*4

*1: 48 V coil type : Single side stable only.
*2: In case of 5 V transistor drive circuit, it is recommended to use 4.5 V type relay.
*3: The "W" and "Y" at the end of the part number only appears on the inner and outer packing. It does not appear on the relay itself.
*4: Each reel is packed with humidity indicators and silica gel in the moisture proof pack.
*5: Please contact our sales representative for detailed specifications when using L2 of the operation function.

©Panasonic Industry Co., Ltd. 2026

Downloaded from Arrow.com.

TYPES

" Type No. " is ordering part number for non Japanese market. " Part No. " is ordering part number for Japanese market.

■ PC board terminal

● Tube packing

Contact arrangement	Rated coil voltage	Single side stable		2 coil latching (LT)		Standard packing	
		Type No.	Part No.	Type No.	Part No.	Carton (1 Tube packing)	Outer carton
2 Form C	1.5 V DC	TX2-1.5V	ATX200	TX2-LT-1.5V	ATX260	40 pcs.	1,000 pcs.
	3 V DC	TX2-3V	ATX201	TX2-LT-3V	ATX261		
	4.5 V DC	TX2-4.5V	ATX206	TX2-LT-4.5V	ATX266		
	5 V DC	TX2-5V	ATX209	TX2-LT-5V	ATX269		
	6 V DC	TX2-6V	ATX202	TX2-LT-6V	ATX262		
	9 V DC	TX2-9V	ATX207	TX2-LT-9V	ATX267		
	12 V DC	TX2-12V	ATX203	TX2-LT-12V	ATX263		
	24 V DC	TX2-24V	ATX204	TX2-LT-24V	ATX264		
	48 V DC	TX2-48V	ATX205	—	—		

Note) Please add " -1 " to the end of the type number or " 20 " to the end of the part number for AgPd contacts (low level load).

■ Surface-mount terminal

● Tube packing

Contact arrangement	Rated coil voltage	Single side stable		2 coil latching (LT)		Standard packing	
		Type No.	Part No.	Type No.	Part No.	Carton (1 Tube packing)	Outer carton
2 Form C	1.5 V DC	TX2S*-1.5V	ATX200S*	TX2S*-LT-1.5V	ATX260S*	40 pcs.	1,000 pcs.
	3 V DC	TX2S*-3V	ATX201S*	TX2S*-LT-3V	ATX261S*		
	4.5 V DC	TX2S*-4.5V	ATX206S*	TX2S*-LT-4.5V	ATX266S*		
	5 V DC	TX2S*-5V	ATX209S*	TX2S*-LT-5V	ATX269S*		
	6 V DC	TX2S*-6V	ATX202S*	TX2S*-LT-6V	ATX262S*		
	9 V DC	TX2S*-9V	ATX207S*	TX2S*-LT-9V	ATX267S*		
	12 V DC	TX2S*-12V	ATX203S*	TX2S*-LT-12V	ATX263S*		
	24 V DC	TX2S*-24V	ATX204S*	TX2S*-LT-24V	ATX264S*		
	48 V DC	TX2S*-48V	ATX205S*	—	—		

Notes) 1: " *" : For each surface-mount terminal identification, input the following letter. SA type: A, SS type: S
2: Please add " -1 " to the end of the type number or " 20 " to be added in front of " surface-mount type " in part number for AgPd contacts (low level load).

● Tape and reel packing: Z

Contact arrangement	Rated coil voltage	Single side stable		2 coil latching (LT)		Standard packing	
		Type No.	Part No.	Type No.	Part No.	Carton (1 Reel packing)	Outer carton
2 Form C	1.5 V DC	TX2S*-1.5V-Z	ATX200S*Z	TX2S*-LT-1.5V-Z	ATX260S*Z	500 pcs.	1,000 pcs.
	3 V DC	TX2S*-3V-Z	ATX201S*Z	TX2S*-LT-3V-Z	ATX261S*Z		
	4.5 V DC	TX2S*-4.5V-Z	ATX206S*Z	TX2S*-LT-4.5V-Z	ATX266S*Z		
	5 V DC	TX2S*-5V-Z	ATX209S*Z	TX2S*-LT-5V-Z	ATX269S*Z		
	6 V DC	TX2S*-6V-Z	ATX202S*Z	TX2S*-LT-6V-Z	ATX262S*Z		
	9 V DC	TX2S*-9V-Z	ATX207S*Z	TX2S*-LT-9V-Z	ATX267S*Z		
	12 V DC	TX2S*-12V-Z	ATX203S*Z	TX2S*-LT-12V-Z	ATX263S*Z		
	24 V DC	TX2S*-24V-Z	ATX204S*Z	TX2S*-LT-24V-Z	ATX264S*Z		
	48 V DC	TX2S*-48V-Z	ATX205S*Z	—	—		

Notes) 1: " * " : For each surface-mount terminal identification, input the following letter. SA type: A, SS type: S.
2: Please add " -1 " to the end of the type number or " 20 " to be added in front of " surface-mount type " in part number for AgPd contacts (low level load).
3: For X, W and Y tape and reel packing, please replace the " Z " at the end of the part number with " X ", " W " or " Y ".
4: If you need the PC board terminal, 1 coil latching and 2 coil latching (L2) of surface-mount terminal, please inquire our sales office for details.

©Panasonic Industry Co., Ltd. 2026

Downloaded from Arrow.com.

RATING

■ Coil data

- Operating characteristics such as " Operate voltage " and " Release voltage " are influenced by mounting conditions or ambient temperature, etc.
  Therefore, please use the relay within ±5 % of rated coil voltage.
- " Initial " means the condition of products at the time of delivery.

● Single side stable

Rated coil voltage	Operate voltage* (at 20 ℃)	Release voltage* (at 20 ℃)	Rated operating current (±10 %, at 20 ℃)	Coil resistance (±10 %, at 20 ℃)	Rated operating power	Max. allowable voltage (at 20 ℃)
1.5 V DC	Max. 75 % V of rated coil voltage (Initial)	Min. 10 % V of rated coil voltage (Initial)	93.8 mA	16 Ω	140 mW	150 % V of rated coil voltage
3 V DC			46.7 mA	64.3 Ω		
4.5 V DC			31 mA	145 Ω		
5 V DC			28.1 mA	178 Ω		
6 V DC			23.3 mA	257 Ω		
9 V DC			15.5 mA	579 Ω		
12 V DC			11.7 mA	1,028 Ω		
24 V DC			5.8 mA	4,114 Ω		
48 V DC			5.6 mA	8,533 Ω	270 mW	120 % V of rated coil voltage

* square, pulse drive

● 2 coil latching

Rated coil voltage	Set voltage* (at 20 ℃)	Reset voltage* (at 20 ℃)	Rated operating current (±10 %, at 20 ℃)		Coil resistance (±10 %, at 20 ℃)		Rated operating power		Max. allowable voltage (at 20 ℃)
			Set coil	Reset coil	Set coil	Reset coil	Set coil	Reset coil	
1.5 V DC	Max. 75 % V of rated coil voltage (Initial)	Max. 75 % V of rated coil voltage (Initial)	133.9 mA	133.9 mA	11.2 Ω	11.2 Ω	200 mW	200 mW	150 % V of rated coil voltage
3 V DC			66.7 mA	66.7 mA	45 Ω	45 Ω			
4.5 V DC			44.5 mA	44.5 mA	101.2 Ω	101.2 Ω			
5 V DC			40 mA	40 mA	125 Ω	125 Ω			
6 V DC			33.3 mA	33.3 mA	180 Ω	180 Ω			
9 V DC			22.2 mA	22.2 mA	405 Ω	405 Ω			
12 V DC			16.7 mA	16.7 mA	720 Ω	720 Ω			
24 V DC			8.3 mA	8.3 mA	2,880 Ω	2,880 Ω			

* square, pulse drive

©Panasonic Industry Co., Ltd. 2026

Downloaded from Arrow.com.

■ Specifications

Item		Specifications	
		Standard contact	AgPd contact (low level load)
Contact data	Contact arrangement	2 Form C	
	Contact resistance (initial)	Max. 100 mΩ (by voltage drop 6 V DC 1 A)	
	Contact material	Ag + Au clad	AgPd + Au clad (stationary), AgPd (movable)
	Contact rating (resistive)	2 A 30 V DC	1 A 30 V DC
	Max. switching power (resistive)	60 W (DC)	30 W (DC)
	Max. switching voltage	220 V DC	
	Max. switching current	2 A (DC)	1 A (DC)
	Min. switching load (reference value)*1	10 µA 10 mV DC	
Insulation resistance (initial)		Min. 1,000 MΩ (at 500 V DC, Measured portion is the same as the case of dielectric strength.)	
Dielectric strength (initial)	Between open contacts	1,000 Vrms for 1 min (detection current: 10 mA)	
	Between contact and coil	2,000 Vrms for 1 min (detection current: 10 mA)	
	Between contact sets	1,000 Vrms for 1 min (detection current: 10 mA)	
Surge withstand voltage (initial)	Between open contacts	1,500 V 10 × 160 µs	
	Between contact and coil	2,500 V 2 × 10 µs	
Time characteristics (initial)	Operate [Set] time	Max. 4 ms at rated coil voltage (at 20 ℃, without bounce) [Max. 4ms (at 20 ℃, without bounce)]	
	Release [Reset] time	Max. 4 ms at rated coil voltage (at 20 ℃, without bounce, without diode) [Max. 4ms (at 20 ℃, without bounce)]	
Shock resistance	Functional	750 m/s² (half-sine shock pulse: 6 ms, detection time: 10 µs)	
	Destructive	1,000 m/s² (half-sine shock pulse: 6 ms)	
Vibration resistance	Functional	10 to 55 Hz (at double amplitude of: 3.3 mm, detection time: 10 µs)	
	Destructive	10 to 55 Hz (at double amplitude of: 5 mm)	
Expected life	Mechanical life	Min. 100 x 10⁶ ope. (Switching frequency: at 180 times/min)	
Conditions	Conditions for usage, transport and storage*2	Ambient temperature: −40 to +85 ℃ (1.5 to 24 V DC), −40 to +70 ℃ (48 V DC), (Allowable temperature is from −40 to +70 ℃ at our standard packing condition.) Humidity: 5 to 85 % RH (Avoid icing and condensation)	
Unit weight		Approx. 2 g	

Note) For AC load, please inquire our sales office for details.
*1: This value is a rough indication of the lower limit at which switching is possible at micro load level.
This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.
AgPd contact is recommended for low level load (Max. 10 V DC, 10 mA level).
*2: For ambient temperature, please refer to the " GUIDELINES FOR RELAY USAGE ".

■ Electrical life

Conditions: resistive load, switching frequency at 20 times/minute


Type		Switching capacity	Number of operations
2 Form C	Standard contact	1 A 30 V DC	Min. 500 × 10³ ope.
		2 A 30 V DC	Min. 100 × 10³ ope.
	AgPd contact (low level load)	1 A 30 V DC	Min. 100 × 10³ ope.

©Panasonic Industry Co., Ltd. 2026


Downloaded from Arrow.com.

REFERENCE DATA

1. Max. switching capacity

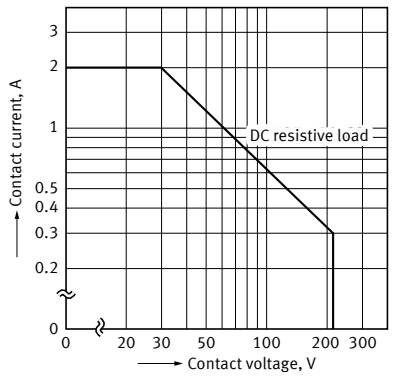


2. Switching life curve

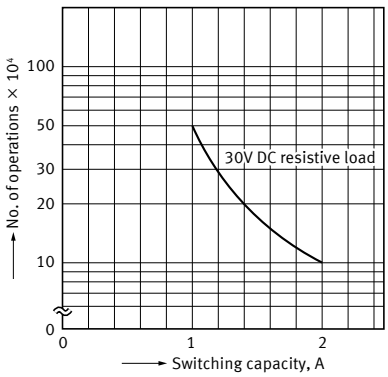


3. Coil temperature rise value (Average)

Tested sample：TX2-5V, 6 pcs.
Point measured：Inside the coil
Ambient temperature：25°C, 85°C

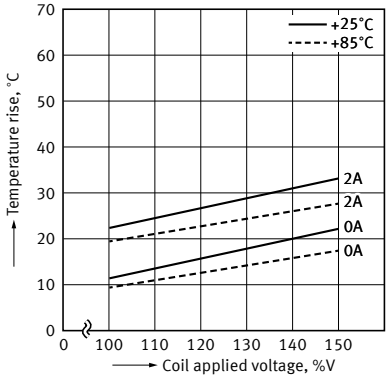


4. Ambient temperature characteristics (Average)

Tested sample：TX2-5V, 5 pcs.

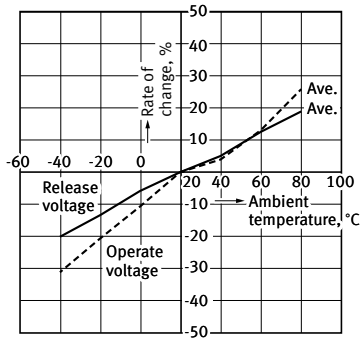

5. Mechanical life


Tested sample：TX2-5V, 10 pcs.
Operating speed：180 cpm

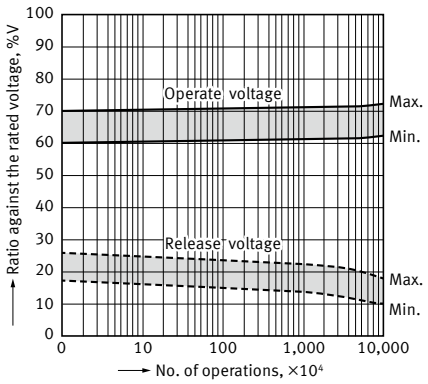


6. Electrical life test (2 A 30 V DC resistive load)

Tested sample：TX2-5V, 6 pcs.
Operating speed：20 cpm

Change of operate and release voltage

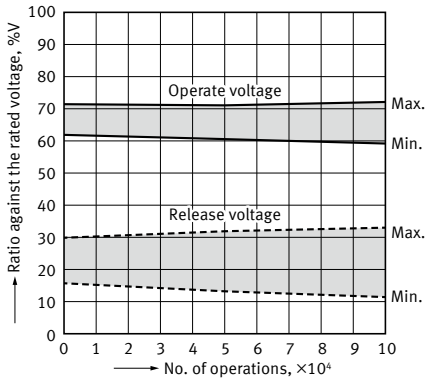

Change of contact resistance

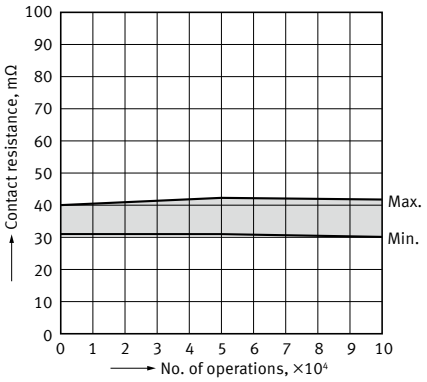


©Panasonic Industry Co., Ltd. 2026

Downloaded from Arrow.com.


7-1. Operate and release time (without diode)

Tested sample : TX2-5V, 10 pcs.

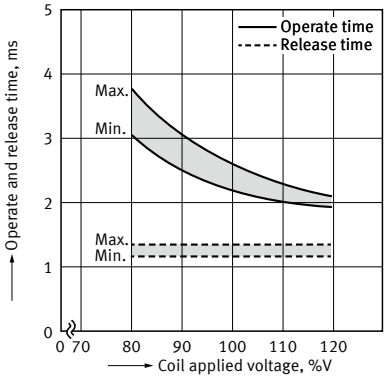


7-2. Operate and release time (with diode)

Tested sample : TX2-5V, 10 pcs.

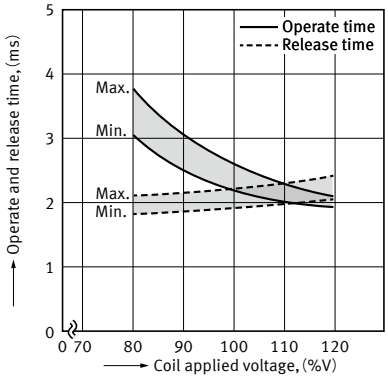


8. Functional shock

Tested sample : TX2-5V, 6 pcs.

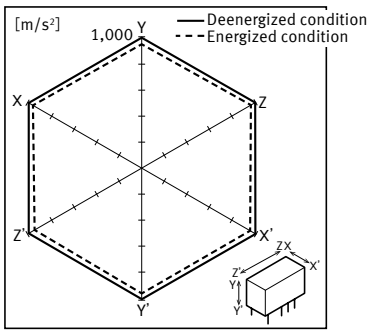


9-1. Influence of proximity mounting

Tested sample : TX2-12V, 6 pcs.

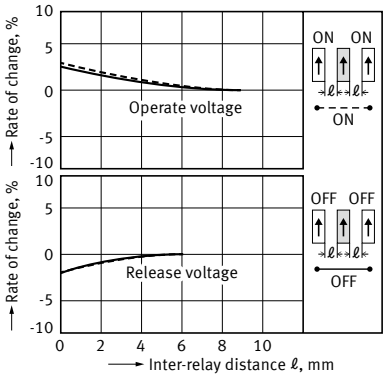


9-2. Influence of proximity mounting

Tested sample : TX2-12V, 6 pcs.

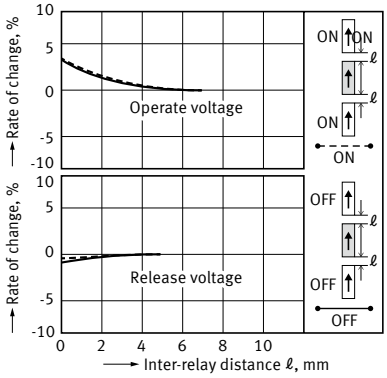


10-1. High frequency characteristics (Isolation)

Tested sample : TX2-12V, 2 pcs.

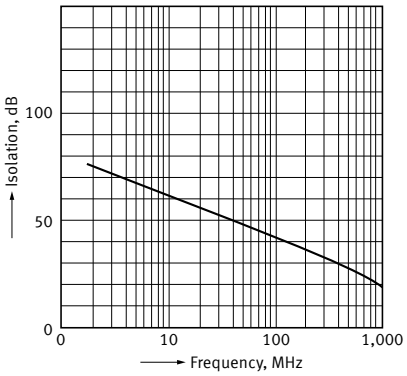

10-2. High frequency characteristics (Insertion loss)

Tested sample : TX2-12V, 2 pcs.

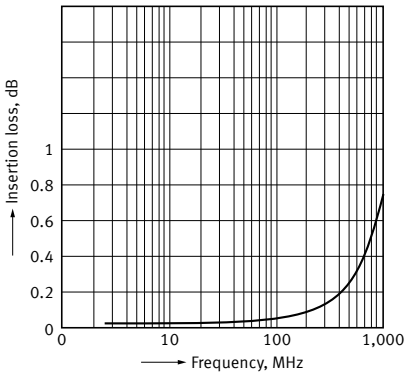

©Panasonic Industry Co., Ltd. 2026

Downloaded from Arrow.com.


DIMENSIONS (Unit: mm)

CAD The CAD data of the products with a " CAD " mark can be downloaded from our Website.


■ PC board terminal

● Single side stable

CAD




External dimensions

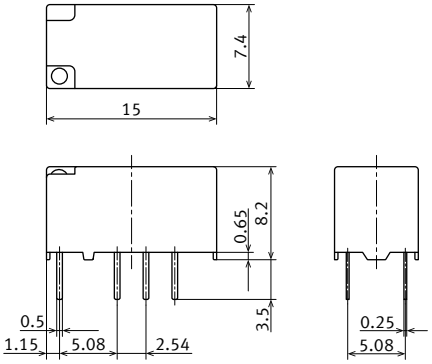


General tolerance : ±0.3

Recommended PC board pattern
(BOTTOM VIEW)



Tolerance : ±0.1


Schematic
(BOTTOM VIEW)
(De-energize)



● 2 coil latching


CAD

External dimensions

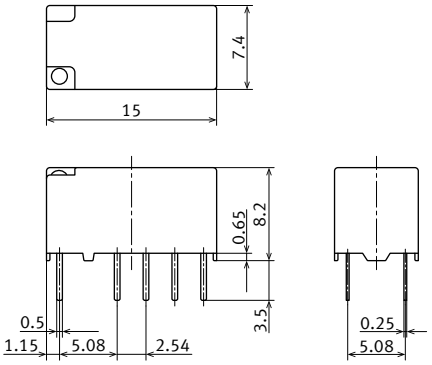


General tolerance : ±0.3

Recommended PC board pattern
(BOTTOM VIEW)




Tolerance : ±0.1

Schematic
(BOTTOM VIEW)
(Reset)
(Operation function LT)



(Operation function L2)



Note) If you need the recommended PC board pattern and schematic, please inquire our sales office for details.















©Panasonic Industry Co., Ltd. 2026

Downloaded from Arrow.com.

■ Surface-mount terminal

CAD

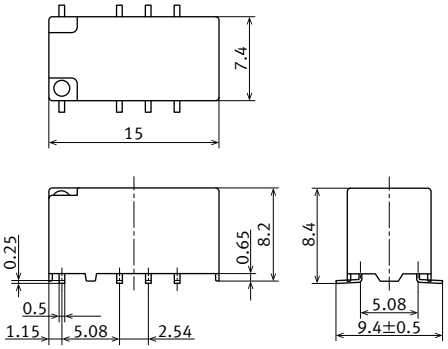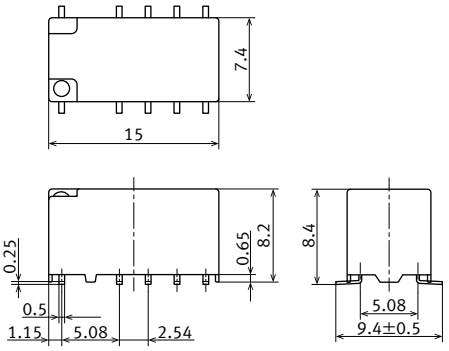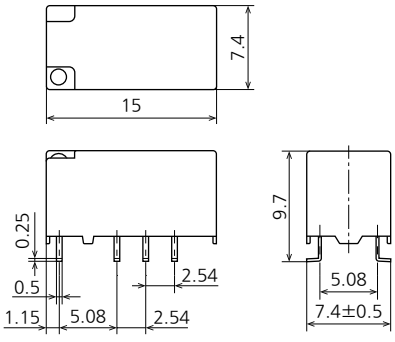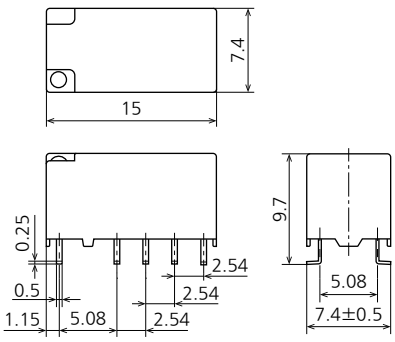

Type		External dimensions	Recommended PC board pattern (TOP VIEW)	Schematic (TOP VIEW)
SA	Single side stable	 General tolerance : ±0.3	 Tolerance : ±0.1	(De-energize) 
	2 coil latching	 General tolerance : ±0.3	 Tolerance : ±0.1	(Reset) (Operation function LT)  (Operation function L2) 
SS	Single side stable	 General tolerance: ±0.3	 Tolerance: ±0.1	(De-energize) 
	2 coil latching	 General tolerance: ±0.3	 Tolerance: ±0.1	(Reset) (Operation function LT)  (Operation function L2) 

Note) If you need the recommended PC board pattern and schematic, please inquire our sales office for details.


©Panasonic Industry Co., Ltd. 2026

Downloaded from Arrow.com.

PACKING STYLE (Unit: mm)

■ Tube packing


1) The relay is packing in a tube with the relay orientation mark on the left side, as shown in the figure below.
   Be sure to maintain relays in the correct orientation when mounting on PC boards.
2) Conditions for operation, transport and storage: −40 to 70 ℃.

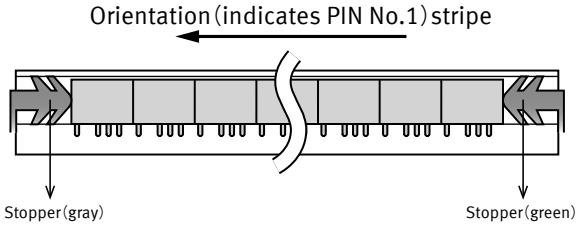


■ Taping packaging

1) Tape dimensions


SA Type

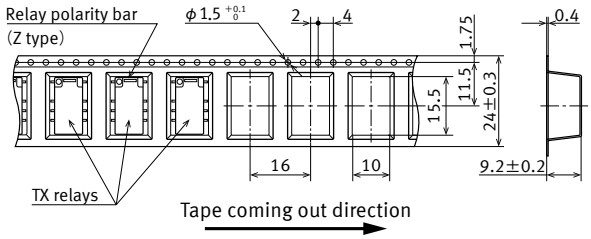

SS Type

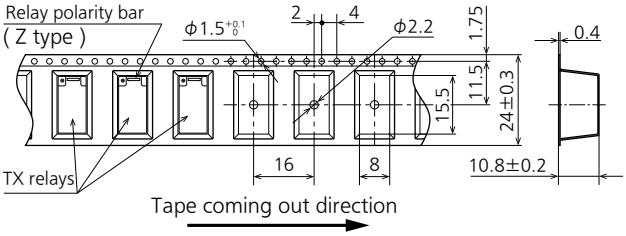

2) Dimensions of plastic reel

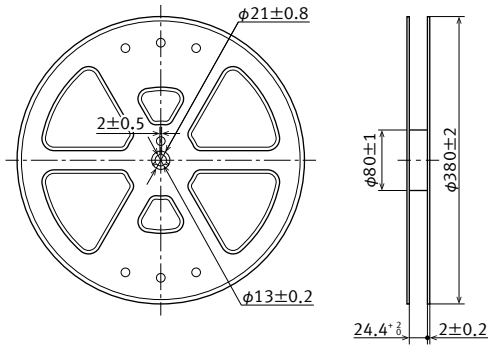

3) Conditions for operation, transport and storage: −40 to 70 ℃.

©Panasonic Industry Co., Ltd. 2026

Downloaded from Arrow.com.

EXAMPLE OF RECOMMENDED SOLDERING CONDITIONS

■ For cautions for use, please read " Relay Soldering and Cleaning Guidelines " and " SMT Soldering Guidelines ".

■ PC board terminal

In case of hand soldering, the following conditions should be observed.
The effect on the relay depends on the PC board used. Please verify the actual PC board to be used.

● Automatic soldering (Flow)

Recommended conditions	Temperature	Time	Measurement location
Preheating	Max. 120 ℃	Within 120 seconds	Solder surface terminal
Soldering	260 ℃ ±5 ℃	Within 6 seconds	Solder temperature

● Hand soldering


Recommended conditions	Temperature	Time	Measurement location
Soldering	Max. 350 ℃	Within 3 seconds	Tip temperature

■ Surface-mount terminal


In case of automatic soldering (reflow), the following conditions should be observed.

● IRS (infrared reflow soldering method) heating conditions

	Recommend conditions
Number of reflow	1 time
Measuring position	Surface of PC board where relay is mounted.

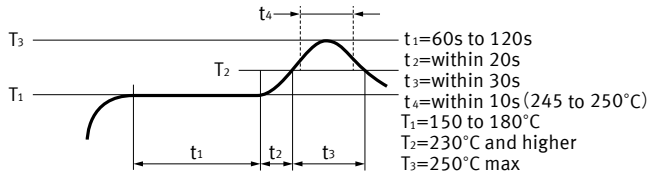

Measuring position of temperature profile



Note : The soldering temperature profile indicates the pad temperature. In some cases, the ambient temperature may be greatly increased. Check for the specific mounting condition.

● Mounting cautions

Cautions to observe when mounting temperature increases in the relay are greatly dependent on the way different parts are located a PC board and the heating method of the reflow device. Therefore, please conduct testing on the actual device beforehand after making sure the parts soldered on the relay terminals and the top of the relay case are within the temperature conditions.

■ Other things to observe

- Exceeding the stipulated conditions when soldering may affect coaxial switch performance. Be sure to consult us beforehand.
- Since thermal stress on a relay will depend on the PC board and process conditions, please be sure to test using the actual PC board.
- Creep-up, wettability and solder strength will differ depending on changes in the mounting conditions and type of solder. Please evaluate based on actual production conditions.
- Only apply coating after the relay has returned to room temperature.

SAFETY STANDARDS

Each standard may be updated at any time, so please check our Website for the latest information.

■ UL/C-UL (Approved)

File No.	Contact rating	Operations	Ambient temperature
E43149	2 A 30 V DC Resistive	100 × 10^3	40 ℃
	0.5 A 125 V AC Resistive	100 × 10^3	40 ℃
	0.3 A 110 V DC Resistive	100 × 10^3	40 ℃

■ CSA (Approved)

CSA standard approved by C-UL.

■ BSI (Attestation)

Compliance with EN 62368-1:2024, Clauses 5.4, 5.5, and 6.4.5, has been verified by BSI.
Certificate of Conformity No. CNF843766

©Panasonic Industry Co., Ltd. 2026

Downloaded from Arrow.com.

GUIDELINES FOR USAGE

■ For cautions for use, please read " GUIDELINES FOR SIGNAL RELAYS USAGE " and " GUIDELINES FOR RELAY USAGE ".

■ Cautions for usage of TX relay

● Latching


- Use latching when conditions involve continuous carrying current.
- Regarding the set and reset pulse time, for the purpose of reliable operation under ambient temperature fluctuations and different operating conditions, we recommend setting the coil applied set and reset pulse time to 10 ms or more at the rated coil voltage.
- The relay is shipped in the reset position. But jolts during transport or impacts during installation can change the reset position. It is, therefore, advisable to build a circuit in which the relay can be initialized (set and reset) just after turning on the power.

● External magnetic field

Since TX relays are highly sensitive polarized relays, their characteristics will be affected by a strong external magnetic field. Avoid using the relay under that condition.

● Precautions for usage of automatic insertion machine

Set the chucking pressure of the pick-up mechanism by the automatic mounting machine with the pressure shown in table 1 to maintain the internal function of the relay.



Please chuck the ▭ portion. Avoid chucking the center of the relay. In addition, excessive chucking pressure to the pinpoint of the relay should be also avoided.

Table 1: Chucking pressure

A, B and D direction	Max. 9.8 N (1 kgf)
C and E direction	Max. 4.9 N (500 gf)

©Panasonic Industry Co., Ltd. 2026

Downloaded from Arrow.com.

GUIDELINES FOR SIGNAL RELAYS USAGE

■ For cautions for use, please read " GUIDELINES FOR RELAY USAGE ".
https://industry.panasonic.com/global/en/products/control/relay/cautions_use

PRECAUTIONS FOR COIL INPUT

■ Long term current carrying

A circuit that will be carrying a current continuously for long periods without relay switching operation. (circuits for emergency lamps, alarm devices and error inspection that, for example, revert only during malfunction and output warnings with form B contacts)
Continuous,long-term current to the coil will facilitate deterioration of coil insulation and characteristics due to heating of the coil itself. For circuits such as these, please use a magnetic-hold type latching relay. If you need to use a single stable relay, use a sealed type relay that is not easily affected by ambient conditions and make a failsafe circuit design that considers the possibility of contact failure or disconnection.

■ DC Coil operating power

Steady state DC current should be applied to the coil.
The wave form should be rectangular. If it includes ripple, the ripple factor should be less than 5 %. However, please check with the actual circuit since the electrical characteristics may vary.
The rated coil voltage should be applied to the coil and the set/reset pulse time of latching type relay differs for each relays, please refer to the relay's individual specifications.

■ Coil connection

When connecting coils of polarized relays, please check coil polarity (＋, －) at the internal connection diagram (Schematic).
If any wrong connection is made, it may cause unexpected malfunction, like abnormal heat, fire and so on, and circuit do not work.
Avoid impressing voltages to the set coil and reset coil at the same time.

■ Maximum allowable voltage and temperature rise

Proper usage requires that the rated coil voltage be impressed on the coil.
Note, however, that if a voltage greater than or equal to the maximum continuous voltage is impressed on the coil, the coil may burn or its layers short due to the temperature rise. Furthermore, do not exceed the usable ambient temperature range listed in the catalog.

● **Operate voltage change due to coil temperature rise (hot start)**

In DC relays, after continuous passage of current in the coil, if the current is turned OFF, then immediately turned ON again, due to the temperature rise in the coil, the operate voltage will become somewhat higher. Also, it will be the same as using it in a higher temperature atmosphere.
The resistance/temperature relationship for copper wire is about 0.4 % for 1 ℃, and with this ratio the coil resistance increases.
That is, in order to operate of the relay, it is necessary that the voltage be higher than the operate voltage and the operate voltage rises in accordance with the increase in the resistance value.
However, for some polarized relays, this rate of change is considerably smaller.

©Panasonic Industry Co., Ltd. 2024


Downloaded from Arrow.com.

NOTES

■ Usage, Storage, and Transport Conditions

During usage, storage, or transportation, avoid locations subject to direct sunlight and maintain normal temperature, humidity, and pressure conditions.
The allowable specifications for environments suitable for usage, storage, and transportation are given below.

1) Temperature:
   The allowable temperature range differs for each relay, so refer to the relay's individual specifications.
   In addition, when transporting or storing relays while they are tube packaged, there are cases when the temperature may differ from the allowable range.
   In this situation, be sure to consult the individual specifications.
2) Humidity: 5 to 85% RH
   The humidity range varies with the temperature.
   Use within the range indicated in the graph.
   (The allowable temperature depends on the relays.)

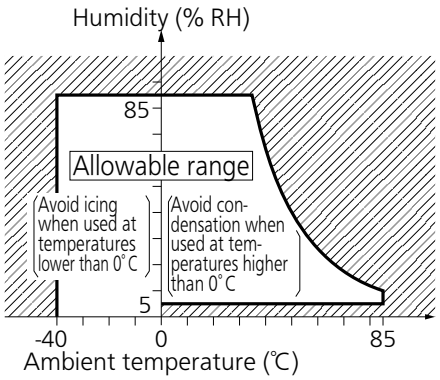

3) Pressure: 86 to 106 kPa

● Condensation

Condensation occurs when the ambient temperature drops suddenly from a high temperature and humidity, or the relay and microwave device is suddenly transferred from a low ambient temperature to a high temperature and humidity.
Condensation causes the failures like insulation deterioration, wire disconnection and rust etc.
Panasonic Industry Co., Ltd. does not guarantee the failures caused by condensation.
The heat conduction by the equipment may accelerate the cooling of device itself, and the condensation may occur.
Please conduct product evaluations in the worst condition of the actual usage. (Special attention should be paid when high temperature heating parts are close to the device. Also please consider the condensation may occur inside of the device.)

● Icing

Condensation or other moisture may freeze on relays when the temperature become lower than 0 ℃.
This icing causes the sticking of movable portion, the operation delay and the contact conduction failure etc.
Panasonic Industry Co., Ltd. does not guarantee the failures caused by the icing.
The heat conduction by the equipment may accelerate the cooling of relay itself and the icing may occur.
Please conduct product evaluations in the worst condition of the actual usage.

● Low temperature and low humidity

The plastic becomes brittle if the switch is exposed to a low temperature, low humidity environment for long periods of time.

● High temperature and high humidity

Storage for extended periods of time (including transportation periods) at high temperature or high humidity levels or in atmospheres with organic gases or sulfide gases may cause a sulfide film or oxide film to form on the surfaces of the contacts and/or it may interfere with the functions.
Check out the atmosphere in which the units are to be stored and transported.

● Package

In terms of the packing format used, make every effort to keep the effects of moisture, organic gases and sulfide gases to the absolute minimum.

©Panasonic Industry Co., Ltd. 2024

Downloaded from Arrow.com.

● Storage requirements


Since the surface-mount terminal type is sensitive to humidity it is packaged with tightly sealed anti-humidity packaging. However, when storing, please be careful of the following.

1) Please use promptly once the anti-humidity pack is opened. (within 72 hours, Max. 30 ℃ / 70% RH).
   If left with the pack open, the relay will absorb moisture which will cause thermal stress when reflow mounting and thus cause the case to expand. As a result, the seal may break.
2) If relays will not be used within 72 hours, please store relays in a humidity controlled desiccator or in an anti-humidity bag to which silica gel has been added.
   * If the relay is to be soldered after it has been exposed to excessive humidity atmosphere, cracks and leaks can occur.
   Be sure to mount the relay under the required mounting conditions.
3) When relays (which is packaged with humidity indicator and silica gel) meeting one of below criteria, please bake (dry) before use.
   - When the storage conditions specified in 1) are exceeded.
   - When humidity indicator is in III or IV status according to judgement standard.

<How to judge>
Please check humidity indicator color and decide if baking is necessary or not.


●: indicate brown, ○: Other than brown (blueish color)

	5%	10%	60%	Bake treatment necessity judgment
I	●	●	●	No need to bake
II	○	●	●	No need to bake
III	○	○	●	Need to bake
IV	○	○	○	Need to bake

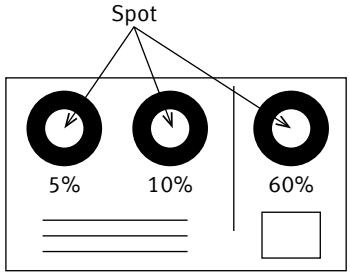


Humidity indicator card

<Baking (Drying) conditions>
- With reel : 45 ℃, 96 hours or more.



- Without reel (including relay only): 60 ℃, 35 hours or more.



4) The following cautionary label is affixed to the anti-humidity pack.

Caution

This vacuum-sealed bag contains

Moisture Sensitive Products

After this bag is opened, the product must be used

within 72 hours

If product is not used within 72 hours, baking is necessary.

For baking conditions please contact us.

● Silicon

When a source of silicone substances (silicone rubber, silicone oil,silicone coating materials and silicone filling materials etc.) is used around the relay, the silicone gas (low molecular siloxane etc.) may be produced
This silicone gas may penetrate into the inside of the relay. When the relay is kept and used in this condition, silicone compound may adhere to the relay contacts which may cause the contact failure.
Do not use any sources of silicone gas around the relay (Including plastic seal types).

● NOx Generation

When relay is used in an atmosphere high in humidity to switch a load which easily produces an arc, the NOx created by the arc and the water absorbed from outside the relay combine to produce nitric acid.
This corrodes the internal metal parts and adversely affects operation.
Avoid use at an ambient humidity of 85 % RH or higher (at 20 ℃).
If use at high humidity is unavoidable, please contact our sales representative.

©Panasonic Industry Co., Ltd. 2024

Downloaded from Arrow.com.

OTHERS

■ Cleaning

- Although the environmentally sealed type relay (plastic sealed type,etc.) can be cleaned, avoid immersing the relay into cold liquid (such as cleaning solvent) immediately after soldering.
  Doing so may deteriorate the sealing performance.
- Surface-mount terminal type relay is sealed type and it can be cleaned by immersion.
  Use pure water or alcohol-based cleaning solvent.
- Cleaning with the boiling method is recommended (The temperature of cleaning liquid should be 40℃ or lower).
  Avoid ultrasonic cleaning on relays.
  Use of ultrasonic cleaning may cause breaks in the coil or slight sticking of the contacts due to the ultrasonic energy.

Please refer to **" the latest product specifications "** when designing your product.
• Requests to customers:
https://industry.panasonic.com/global/en/salespolicies

©Panasonic Industry Co., Ltd. 2024

Downloaded from Arrow.com.

■ Global Sales Network Information: industry.panasonic.com/global/en/salesnetwork/globalnetwork

Panasonic
INDUSTRY

Panasonic Industry Co., Ltd.
Electromechanical Control Business Division
■1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industry.panasonic.com

©Panasonic Industry Co., Ltd. 2026

Specifications are subject to change without notice.
ASCTB18E 202610
2026.10

Downloaded from Arrow.com.