



## 73JA10K

**73 Series Precision Potentiometer, Wire Wound Element, Solder Lug Terminals, 2 W Power Rating, 10 kOhm Resistance Value**

*Representative photograph, actual product appearance may vary.*

*Due to regional agency approval requirements, some products may not be available in your area.*

*Please contact your regional Honeywell office regarding your product of choice.*

### Features

- Robust nickel-plated brass shaft and bushings
- Wirewound element
- Linear taper
- 10-turn construction

### Typical Applications

- Manual controls

### Description

The 73 Series is a precision type potentiometer made with a wirewound element. It offers 10 turns for higher resolution and accurate output. It has a power rating of 2 watts.



## 73JA10K

**73 Series Precision Potentiometer, Wire Wound Element, Solder Lug Terminals, 2 W Power Rating, 10 kOhm Resistance Value**


Product Specifications	
Potentiometer Type	Precision
Element Type	Wire Wound
Terminal Type	Solder lug
Power Rating	2 W
Turns	10
Resistance Value	10 kOhm
Resistance Tolerance	± 5 %
Linearity	± 0.25 %
Bushing Thread	9,53 mm [0.375 in] x 32 NEF-2A
Bushing length	7,92 mm [0.312 in]
Bushing Type	Standard
Shaft Diameter	6,35 mm [0.25 in]
Shaft length	20,62 mm [0.812 in]

<b>Shaft Ending</b>	Slotted
<b>Body</b>	22.23 mm [0.875 in] diameter, $\pm 0.79$ mm [0.031 in]
<b>Electrical Taper</b>	Linear
<b>Operating Temperature</b>	-40 °C to 120 °C [-40 °F to 248 °F]
<b>Working Voltage (Max.)</b>	500 V
<b>Rotational Life</b>	50000 cycles
<b>Mechanical Rotation</b>	3600°
<b>Availability</b>	Global
<b>Series Name</b>	73 Series
<b>UNSPSC Code</b>	4111363300
<b>UNSPSC Commodity</b>	4111363300 Potentiometers


**Honeywell**

## 73JA10K

73 Series Precision Potentiometer, Wire Wound Element, Solder lug Terminals, 2 W Power Rating, 10 kOhm Resistance Value

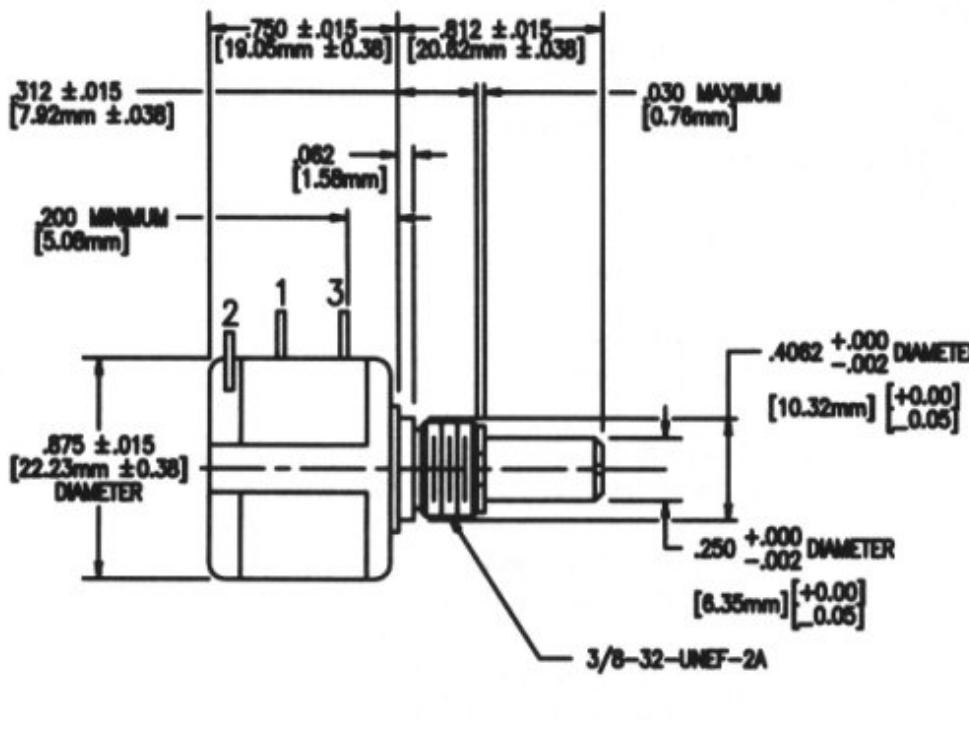

For Reference Only

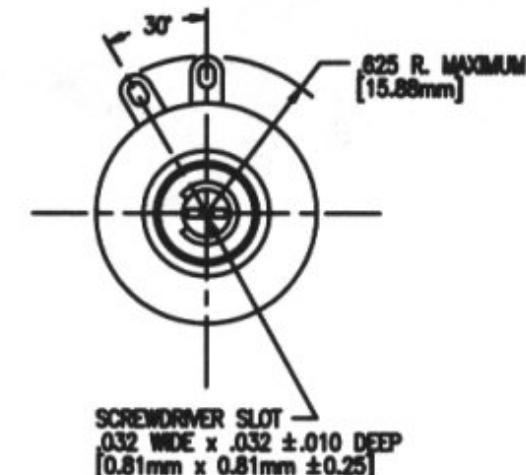

**Honeywell**

## 73JA10K

73 Series Precision Potentiometer, Wire Wound Element, Solder lug Terminals, 2 W Power Rating, 10 kOhm Resistance Value

## **⚠ WARNING**

### **PERSONAL INJURY**

DO NOT USE these products as safety or emergency stop devices, or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

## **⚠ WARNING**

### **MISUSE OF DOCUMENTATION**

- The information presented in this product sheet (or catalog) is for reference only.  
DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

© Copyright Honeywell Inc. 1998-2004 All rights reserved.