

Description

Single pole circuit breaker in a miniaturised design.

Features

- For integral-, solder- and threadneck mounting, actuator design: reset button. For other mounting and actuator designs, please refer to the additional 1410 data sheets.
- Current rating range 0.63...10 A
- Rated voltage range AC 240 V, DC 28 V, DC 50 V
- Very fast trip curve through globally unique hot wire principle
- Reliable switching behaviour through snap action mechanism
- Trip behaviour is independent from the ambient temperature
- Signalling the OFF condition possible via auxiliary circuit

Typical applications

Overcurrent protection of

- electronic components on PCBs
- motors and transformers in small devices (measuring and control technology, HiFi systems etc.)

Benefits


- Perfect replacement for blade fuses thanks to its compact design and suitable current ratings
- Maximum device availability: after an overcurrent trip, the circuit breaker can be immediately reset, no fuse replacement required
- Fast trip curve ensures on-time disconnection and protection of sensitive components especially on printed circuit boards

Compliance



Approvals

Approval authority	Standard	Rated voltage	Current rating range
VDE	IEC/EN 60934	AC 240 V DC 50 V DC 28 V	0.63 A...6.3 A 0.63 A...2.25 A 2.5 A...10 A
UL	UL 1077	AC 250 V DC 50 V	0.63 A...10 A 0.63 A...10 A
CSA	C22.2 No 235	AC 125 V DC 48 V	0.63 A...8 A 0.63 A...8 A

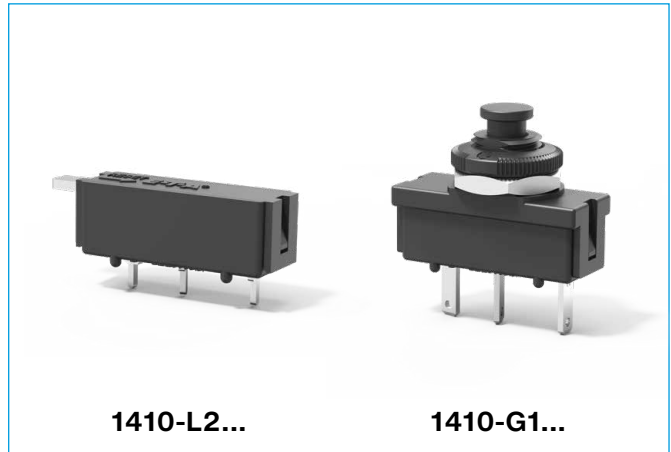

Technical data

For detailed technical information please see www.e-t-a.de/ti_en

Rated voltage	AC 240 V, DC 28 V, DC 50 V AC 250 V (UL)		
Current rating range 1-2	0.63 ... 10 A		
Auxiliary circuit 1-3	0.2 x I _N max. 1 A, AC 250 V		
Typical life AC 240 V: 0.63...2.25 A 500 disconnections at 2 x I _N , inductive 2,5...10 A 500 disconnections at 2 x I _N , resist. DC 50 V: 0.63...2.25 A 500 disconnections at 2 x I _N , inductive DC 28 V: 2.5...10 A 500 disconnections at 2 x I _N , inductive			
Ambient temperature	-20 ... +70 °C		
Insulation coordination (IEC 60664, IEC 60934)	Overvoltage category II (Rated impulse voltage 2.5 kV), pollution degree 2		
Dielectric strength			
Degree of protection	II at actuating area, test voltage AC 3000 V		
Insulation resistance	> 100 MOhm (DC 500 V)		
Interrupting capacity I _{cn} (o-o-o)	0.63 ... 2 A	12 x I _N	
	2.5 ... 8 A	8 x I _N AC, max. 50 A	
	10 A	6 x I _N	
	3.15 ... 10 A	10 x I _N DC	
Rupture capacity	0.63 ... 10 A	2,000 A	at AC 250 V
	0.63 ... 8 A	200 A	at DC 50 V
UL 1077			
Degree of protection (IEC 60529)	Actuating area IP40 IP00 terminal area		
Vibration resistance	8 g (57-500 Hz), ± 0.61 mm (10-57 Hz), Test according to IEC 60068-2-6, test Fc 10 frequency cycles/axis		
Shock resistance	20 g (11 ms) Test according to IEC 60068-2-27, test Ea		
Corrosion	48 hours at 5 % salt mist, Test according to IEC 60068-2-11, test Ka		
Humidity test	96 hrs 95 % RH, test according to IEC 60068-2-78, test Cab		
Mass	approx. 5 g		

Preferred types

[illegible]

Ordering number code

Type number

1410 Circuit breakers with thermal trip principle

Mounting method

L2 Integral mounting or PCB mounting,
grid 10.15 x 7.62 mm

G1 Threadneck mounting or PCB mounting

Number of poles

1 1-pole thermally protected

Design, accessories

0 none

1 with screwed hexagonal and plastic knurled nut (> 5 pieces: hexagonal and plastic knurled nut bulk shipped)

Terminal design

L2 Soldering pins 1 x 0.8 mm, silver-plated

P2 Blade terminals according to IEC 61210, 2.8 x 0.8 mm, silver-plated (for -G only)

Characteristic curve

F1 Fast trip curve

Actuator, type and colour

S01 Reset button, black(1410-G)

S02 Reset slide switch, white (1410-L2)

Current rating range

0.63 ... 10 A

1410- L 2 1 0 - L2 F1 -S01-0.8 A Ordering example


Please observe our minimum order quantities.

Current ratings I_N and typical internal resistance values


Current rating (A)	Internal resistance (Ω)	Current rating (A)	Internal resistance (Ω)
0.63	1.8	4	< 0.1
0.8	1.7	4.5	< 0.1
1	1.3	5	< 0.1
1.5	< 1	6.3	< 0.1
2	< 1	8	< 0.1
2.25	< 0.15	10	< 0.1
3.15	< 0.12		

Dimensions


1410-L210-L2F1-S02

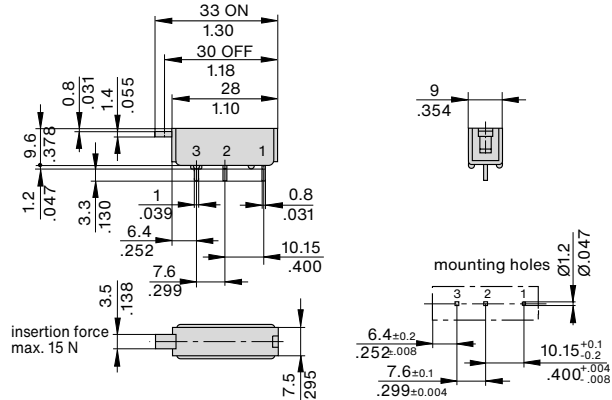

1410-G111-P2F1-S01

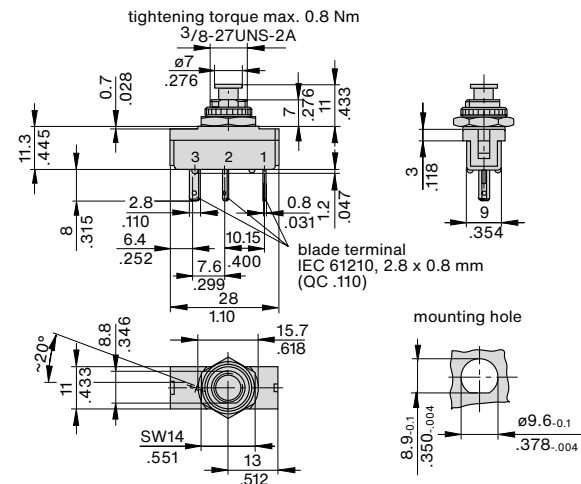


1410-G110-L2F1-S01

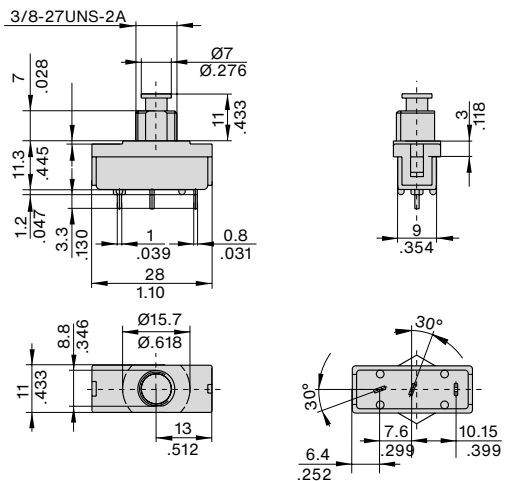

Note


- Avoid stronger pressure on the reset button in ON condition, as this may lead to interruptions
- For maximum service life, the circuit breaker must not be switched on under load

Schematic diagram



Time/current characteristics


Ambient temperature 23 °C

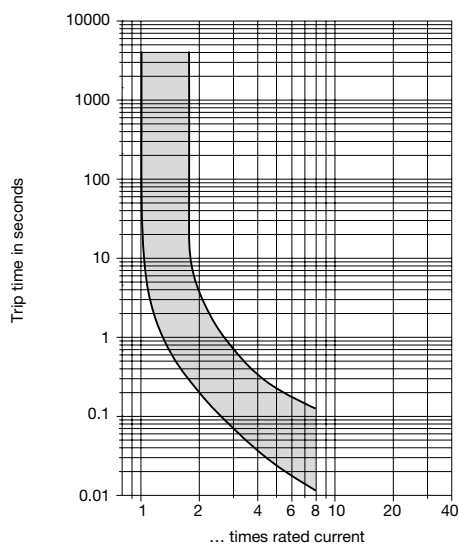


Installation drawing

1410-L2...

Installation behind a cover which can only be removed by means of a tool




1410-G...

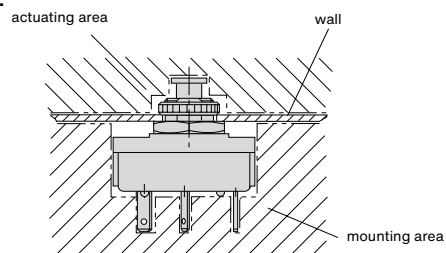


Accessories

Knurled nut 3/8"
plastic
Y 307 117 02



Hex nut 3/8"
nickel-plated brass
Y 300 192 01



All information and data given on our products are accurate and reliable to the best of our knowledge, but E-T-A does not accept any responsibility for the use in applications which are not in accordance with the present specification. E-T-A reserves the right to change specifications at any time in the interest of technical improvement. Dimensions are subject to change without notice. Please enquire for the latest dimensional drawing with tolerances if required. All dimensions, data, pictures and descriptions are for information only and are not binding. Amendments, errors and omissions excepted. Product part numbers may differ from their marking.