# EVERLIGHT ELECTRONICS CO.,LTD.

### **Technical Data Sheet**

### 0603 Package Chip LED(0.8mm Height)

#### 19-21/R6C-AN1P2/3T

#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free
- The product itself will remain within RoHS compliant version.



- The 19-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

#### **Applications**

- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.

#### **Device Selection Guide**

Part No.			
	Material	Emitted Color	Lens Color
19-21/R6C-AN1P2/3T	AlGaInP	Brilliant Red	Water Clear

1)-21/KUC-AMI 2/51



Everlight Electronics Co., Ltd. Device No: SZDSE-191-R13

http://www.everlight.com


Rev.1

Page: 1 of 10


Prepared date: 4-July-2006




# **Package Outline Dimensions**







For reflow soldering

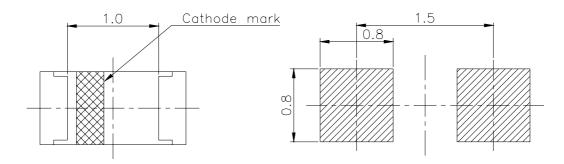

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev.1

Page: 2 of 10

Device No: SZDSE-191-R13

Prepared date: 4-July-2006



### **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit	
Reverse Voltage	$V_R$	5	V	
Forward Current	$I_{F}$	25	mA	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$	
Electrostatic Discharge(HBM)	ESD	2000	V	
Power Dissipation	Pd	60	mW	
Peak Forward Current (Duty 1/10 @1KHz)	$I_{ extsf{FP}}$	60	mA	
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec Hand Soldering: 350 °C for 3 sec.		

### **Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	$I_{V}$	28.5		72.0	mcd	
Peak Wavelength	λр		632		nm	
Dominant Wavelength	λd	617.5		633.5	nm	
Spectrum Radiation Bandwidth	Δλ		20		nm	I <sub>F</sub> =20mA
Viewing Angle	2 \theta 1/2		100		deg	
Forward Voltage	$V_{\mathrm{F}}$	1.70		2.40	V	
Reverse Current	$I_R$			10	$\mu$ A	V <sub>R</sub> =5V

#### **Notes:**

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 3 of 10



### Bin Range Of Dom. Wavelength

Group	Bin	Min	Max	Unit	Condition
A	E4	617.5	621.5		I <sub>F</sub> =20mA
	E5	621.5	625.5	nm	
	E6	625.5	629.5		
	E7	629.5	633.5		

### **Bin Range Of Luminous Intensity**

	<u> </u>			
Bin	Min	Max	Unit	Condition
N1	28.5	36.0	mcd	I <sub>F</sub> =20mA
N2	36.0	45.0		
P1	45.0	57.0		
P2	57.0	57.0		

#### **Notes:**

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 4 of 10





# EVERLIGHT ELECTRONICS CO.,LTD.


### 19-21/R6C-AN1P2/3T


#### **Typical Electro-Optical Characteristics Curves**

















Everlight Electronics Co., Ltd.

http://www.everlight.com

.

Page: 5 of 10

Device No: SZDSE-191-R13

Prepared date: 4-July-2006



#### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 



#### **Reel Dimensions**

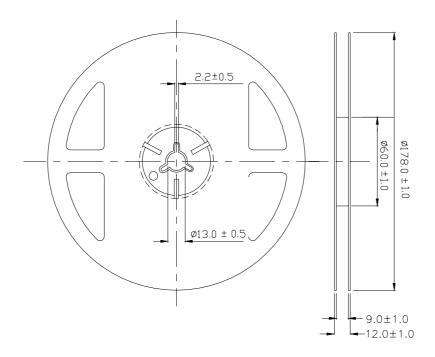


**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 6 of 10




### Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

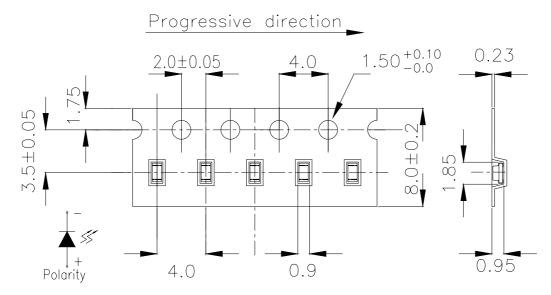

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

#### **Moisture Resistant Packaging**

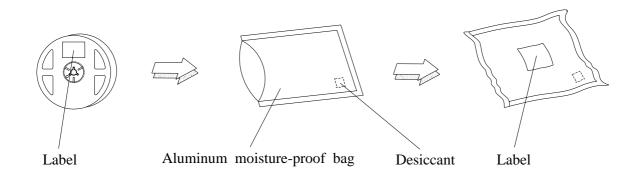

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev.1

Page: 7 of 10

Device No: SZDSE-191-R13

Prepared date: 4-July-2006



#### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int$ 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 8 of 10




#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
  - 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
  - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
  - 3.1 Pb-free solder temperature profile

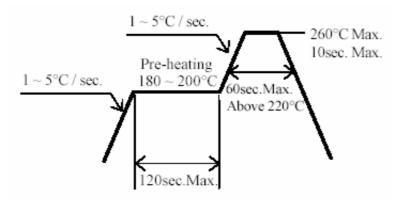

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 9 of 10




#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

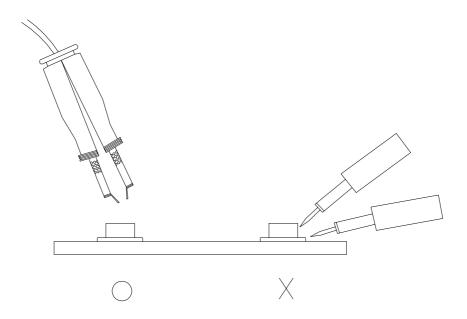

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 10 of 10