Spansion® Analog and Microcontroller Products

The following document contains information on Spansion analog and microcontroller products. Although the document is marked with the name “Fujitsu”, the company that originally developed the specification, Spansion will continue to offer these products to new and existing customers.

Continuity of Specifications

There is no change to this document as a result of offering the device as a Spansion product. Any changes that have been made are the result of normal document improvements and are noted in the document revision summary, where supported. Future routine revisions will occur when appropriate, and changes will be noted in a revision summary.

Continuity of Ordering Part Numbers

Spansion continues to support existing part numbers beginning with “MB”. To order these products, please use only the Ordering Part Numbers listed in this document.

For More Information

Please contact your local sales office for additional information about Spansion memory, analog, and microcontroller products and solutions.

Downloaded from Arrow.com.

FUJITSU MICROELECTRONICS
DATA SHEET

DS07-13802-3E

16-bit Proprietary Microcontroller

CMOS

F²MC-16FX MB96340 Series

MB96345/346 MB96F345 *1
MB96F346/F347/F348

■ DESCRIPTION

MB96340 series is based on Fujitsu's advanced 16FX architecture (16-bit with instruction pipeline for RISC-like performance). The CPU uses the same instruction set as the established 16LX series - thus allowing for easy migration of 16LX Software to the new 16FX products. 16FX improvements compared to the previous generation include significantly improved performance - even at the same operation frequency, reduced power consumption and faster start-up time.

For highest processing speed at optimized power consumption an internal PLL can be selected to supply the CPU with up to 56MHz operation frequency from an external 4MHz resonator. The result is a minimum instruction cycle time of 17.8ns going together with excellent EMI behavior. An on-chip clock modulation circuit significantly reduces emission peaks in the frequency spectrum. The emitted power is minimized by the on-chip voltage regulator that reduces the internal CPU voltage. A flexible clock tree allows to select suitable operation frequencies for peripheral resources independent of the CPU speed.

*1: These devices are under development and specification is preliminary. These products under development may change its specification without notice.

Note: F²MC is the abbreviation of Fujitsu Flexible Microcontroller

For the information for microcontroller support, see the following web site.

http://edevice.fujitsu.com/micom/en-support/

Copyright©2009 FUJITSU MICROELECTRONICS LIMITED All rights reserved
2009.6

FUJITSU

Downloaded from Arrow.com.

■ FEATURES

Feature	Description
Technology	• 0.18µm CMOS
CPU	• F²MC-16FX CPU • Up to 56 MHz internal, 17.8 ns instruction cycle time • Optimized instruction set for controller applications (bit, byte, word and long-word data types; 23 different addressing modes; barrel shift; variety of pointers) • 8-byte instruction execution queue • Signed multiply (16-bit × 16-bit) and divide (32-bit/16-bit) instructions available
System clock	• On-chip PLL clock multiplier (x1 - x25, x1 when PLL stop) • 3 MHz - 16 MHz external crystal oscillator clock (maximum frequency when using ceramic resonator depends on Q-factor). • Up to 56 MHz external clock for devices with fast clock input feature • 32-100 kHz subsystem quartz clock • 100kHz/2MHz internal RC clock for quick and safe startup, oscillator stop detection, watchdog • Clock source selectable from main- and subclock oscillator (part number suffix “W”) and on-chip RC oscillator, independently for CPU and 2 clock domains of peripherals. • Low Power Consumption - 13 operating modes : (different Run, Sleep, Timer modes, Stop mode) • Clock modulator
On-chip voltage regulator	• Internal voltage regulator supports reduced internal MCU voltage, offering low EMI and low power consumption figures
Low voltage reset	• Reset is generated when supply voltage is below minimum.
Code Security	• Protects ROM content from unintended read-out
Memory Patch Function	• Replaces ROM content • Can also be used to implement embedded debug support
DMA	• Automatic transfer function independent of CPU, can be assigned freely to resources
Interrupts	• Fast Interrupt processing • 8 programmable priority levels • Non-Maskable Interrupt (NMI)
Timers	• Three independent clock timers (23-bit RC clock timer, 23-bit Main clock timer, 17-bit Sub clock timer) • Watchdog Timer

Downloaded from Arrow.com.

Feature	Description
CAN	• Supports CAN protocol version 2.0 part A and B • ISO16845 certified • Bit rates up to 1 Mbit/s • 32 message objects • Each message object has its own identifier mask • Programmable FIFO mode (concatenation of message objects) • Maskable interrupt • Disabled Automatic Retransmission mode for Time Triggered CAN applications • Programmable loop-back mode for self-test operation
USART	• Full duplex USARTs (SCI/LIN) • Wide range of baud rate settings using a dedicated reload timer • Special synchronous options for adapting to different synchronous serial protocols • LIN functionality working either as master or slave LIN device
I^2C	• Up to 400 kbps • Master and Slave functionality, 8-bit and 10-bit addressing
A/D converter	• SAR-type • 10-bit resolution • Signals interrupt on conversion end, single conversion mode, continuous conversion mode, stop conversion mode, activation by software, external trigger or reload timer
A/D Converter Reference Voltage switch	• 2 independent positive A/D converter reference voltages available
Reload Timers	• 16-bit wide • Prescaler with $1/2^1$, $1/2^2$, $1/2^3$, $1/2^4$, $1/2^5$, $1/2^6$ of peripheral clock frequency • Event count function
Free Running Timers	• Signals an interrupt on overflow, supports timer clear upon match with Output Compare (0, 4), Prescaler with 1, $1/2^1$, $1/2^2$, $1/2^3$, $1/2^4$, $1/2^5$, $1/2^6$, $1/2^7$,$1/2^8$ of peripheral clock frequency
Input Capture Units	• 16-bit wide • Signals an interrupt upon external event • Rising edge, falling edge or rising & falling edge sensitive
Output Compare Units	• 16-bit wide • Signals an interrupt when a match with 16-bit I/O Timer occurs • A pair of compare registers can be used to generate an output signal.

Downloaded from Arrow.com.

Feature	Description
Programmable Pulse Generator	• 16-bit down counter, cycle and duty setting registers • Interrupt at trigger, counter borrow and/or duty match • PWM operation and one-shot operation • Internal prescaler allows 1, 1/4, 1/16, 1/64 of peripheral clock as counter clock and Reload timer overflow as clock input • Can be triggered by software or reload timer
Real Time Clock	• Can be clocked either from sub oscillator (devices with part number suffix “W”), main oscillator or from the RC oscillator • Facility to correct oscillation deviation of Sub clock or RC oscillator clock (clock calibration) • Read/write accessible second/minute/hour registers • Can signal interrupts every half second/second/minute/hour/day • Internal clock divider and prescaler provide exact 1s clock
External Interrupts	• Edge sensitive or level sensitive • Interrupt mask and pending bit per channel • Each available CAN channel RX has an external interrupt for wake-up • Selected USART channels SIN have an external interrupt for wake-up
Non Maskable Interrupt	• Disabled after reset • Once enabled, can not be disabled other than by reset. • Level high or level low sensitive • Pin shared with external interrupt 0.
External bus interface	• 8-bit or 16-bit bidirectional data • Up to 24-bit addresses • 6 chip select signals • Multiplexed address/data lines • Wait state request • External bus master possible • Timing programmable
Alarm comparator	• Monitors an external voltage and generates an interrupt in case of a voltage lower or higher than the defined thresholds • Threshold voltages defined externally or generated internally • Status is readable, interrupts can be masked separately

Downloaded from Arrow.com.

Feature	Description
I/O Ports	• Virtually all external pins can be used as general purpose I/O • All push-pull outputs (except when used as I2C SDA/SCL line) • Bit-wise programmable as input/output or peripheral signal • Bit-wise programmable input enable • Bit-wise programmable input levels: Automotive / CMOS-Schmitt trigger / TTL (TTL levels not supported by all devices) • Bit-wise programmable pull-up resistor • Bit-wise programmable output driving strength for EMI optimization
Packages	• 100-pin plastic QFP and LQFP
Flash Memory	• Supports automatic programming, Embedded Algorithm • Write/Erase/Erase-Suspend/Resume commands • A flag indicating completion of the algorithm • Number of erase cycles: 10,000 times • Data retention time: 20 years • Erase can be performed on each sector individually • Sector protection • Flash Security feature to protect the content of the Flash • Low voltage detection during Flash erase

Downloaded from Arrow.com.

■ PRODUCT LINEUP

Features		MB96V300B	MB96(F)34x
Product type		Evaluation sample	Flash product: MB96F34x Mask ROM product: MB9634x
Product options			
YS		NA	Low voltage reset persistently on / Single clock
RS			Low voltage reset can be disabled / Single clock
YW			Low voltage reset persistently on / Dual clock
RW			Low voltage reset can be disabled / Dual clock
TS			indep. 32KB Flash / Low voltage reset persistently on / Single clock
HS			indep. 32KB Flash / Low voltage reset can be disabled / Single clock
TW			indep. 32KB Flash / Low voltage reset persistently on / Dual clock
HW			indep. 32KB Flash / Low voltage reset can be disabled / Dual clock
FS			64KB Data Flash / Low voltage reset persistently on / Single clock
DS			64KB Data Flash / Low voltage reset can be disabled / Single clock
FW			64KB Data Flash / Low voltage reset persistently on / Dual clock
DW			64KB Data Flash / Low voltage reset can be disabled / Dual clock
AS			No CAN / Low voltage reset can be disabled / Single clock devices
CS			No CAN / indep. 32KB Flash / Low voltage reset can be disabled / Single clock
AW			No CAN / Low voltage reset can be disabled / Dual clock
CW			No CAN / indep. 32KB Flash / Low voltage reset can be disabled / Dual clock
Flash/ROM	RAM		
160KB	8KB	ROM/Flash memory emulation by external RAM, 92KB internal RAM	MB96345Y [*1], MB96345R [*1]
224KB [Flash A: 160KB, Data Flash A: 64KB]	8KB		MB96F345F [*1], MB96F345D [*1]
288KB	16KB		MB96F346Y, MB96346Y [*1], MB96F346R, MB96346R [*1], MB96F346A
416KB	16KB		MB96F347Y, MB96F347R, MB96F347A
544KB	24KB		MB96F348Y, MB96F348R, MB96F348A
576KB [Flash A: 544KB, Flash B: 32KB]	24KB		MB96F348T, MB96F348H, MB96F348C
Package		BGA416	FPT-100P-M20 FPT-100P-M22

Downloaded from Arrow.com.


Features	MB96V300B	MB96(F)34x
DMA	16 channels	6 channels
USART	10 channels	7 channels
I2C	2 channels	2 channels
A/D Converter	40 channels	24 channels
A/D Converter Reference Voltage switch	yes	yes (except MB96F345Dyy or MB96F345Fyy)
16-bit Reload Timer	6 channels + 1 channel (for PPG)	4 channels + 1 channel (for PPG)
16-bit Free-Running Timer	4 channels	2 channels
16-bit Output Compare	12 channels	8 channels
16-bit Input Capture	12 channels	8 channels
16-bit Programmable Pulse Generator	20 channels	16 channels
CAN Interface	5 channels	MB96(F)34xAyy or MB96(F)34xCyy: no MB96F345Dyy or MB96F345Fyy: 1 channel others: 2 channels
External Interrupts	16 channels	
Non-Maskable Interrupt	1 channel	
Real Time Clock	1	
I/O Ports	136	80 for part number with suffix "W", 82 for part number with suffix "S"
Alarm comparator	2 channels	MB96F345Dyy or MB96F345Fyy: no others: 2 channels
External bus interface	Yes	Yes (multiplexed address/data)
Chip select	6 signals	
Clock output function	2 channels	
Low voltage reset	Yes	
On-chip RC-oscillator	Yes	

*1: These devices are under development and specification is preliminary. These products under development may change its specification without notice.

Downloaded from Arrow.com.

■ BLOCK DIAGRAM

Block diagram of MB96(F)34x

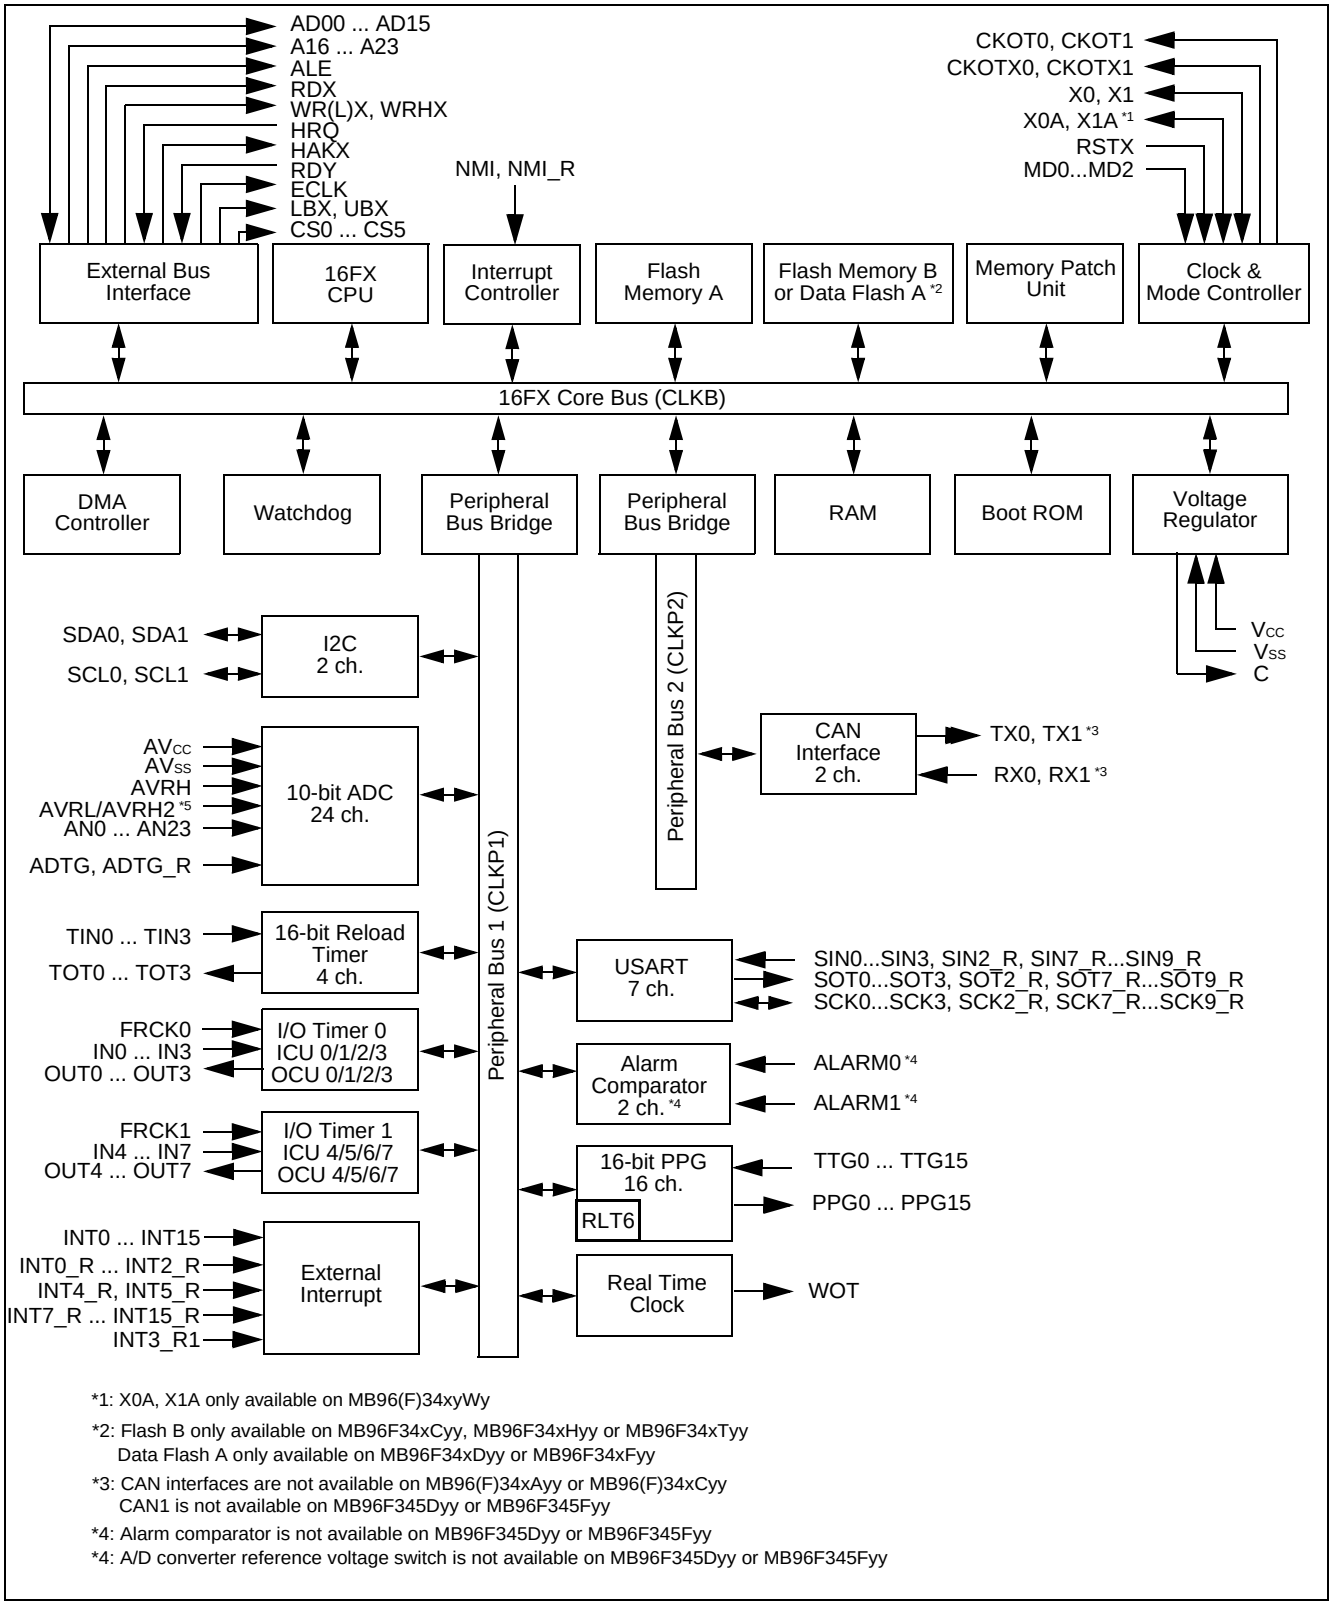

*1: X0A, X1A only available on MB96(F)34xyWy

*2: Flash B only available on MB96F34xCyy, MB96F34xHyy or MB96F34xTyy
Data Flash A only available on MB96F34xDyy or MB96F34xFyy

*3: CAN interfaces are not available on MB96(F)34xAyy or MB96(F)34xCyy
CAN1 is not available on MB96F345Dyy or MB96F345Fyy


*4: Alarm comparator is not available on MB96F345Dyy or MB96F345Fyy

*4: A/D converter reference voltage switch is not available on MB96F345Dyy or MB96F345Fyy

Downloaded from Arrow.com.

■ PIN ASSIGNMENTS

Pin assignment of MB96(F)34x (FPT-100P-M22)

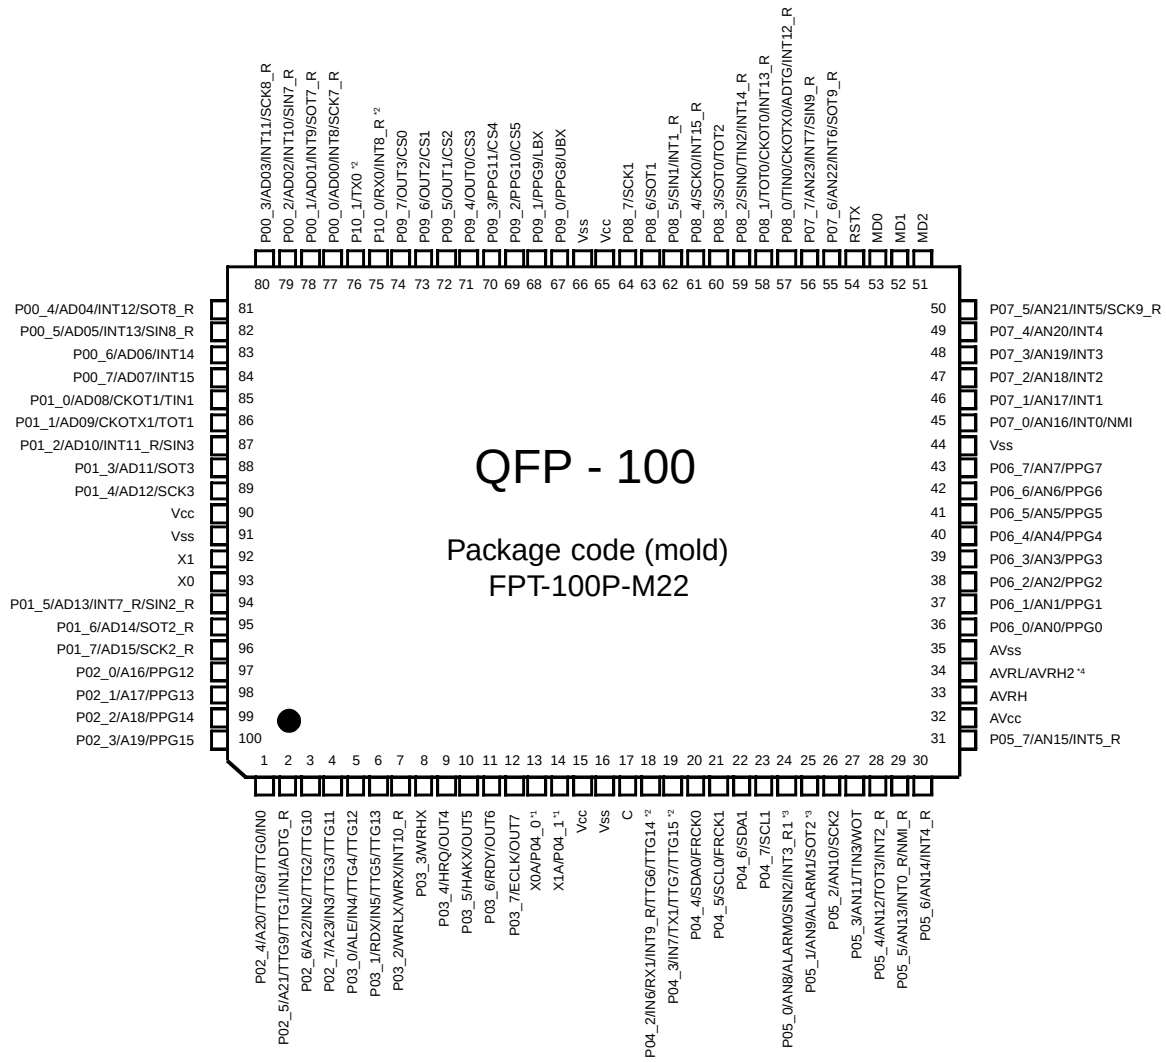

*1: MB96(F)34xyWy: X0A, X1A
MB96(F)34xySy: P04_0, P04_1

*2: TX0, RX0, TX1, RX1 are not available on MB96(F)34xAyy or MB96(F)34xCyy
TX1, RX1 are not available on MB96F345Dyy or MB96F345Fyy

*3: ALARM0, ALARM1 are not available on MB96F345Dyy or MB96F345Fyy

*4: AVRH2 is not available on MB96F345Dyy or MB96F345Fyy


(FPT-100P-M22)

Remark:

MB96(F)34x products are pin-compatible to F²MC-16LX family MB90340 series.

Downloaded from Arrow.com.

Pin assignment of MB96(F)34x (FPT-100P-M20)

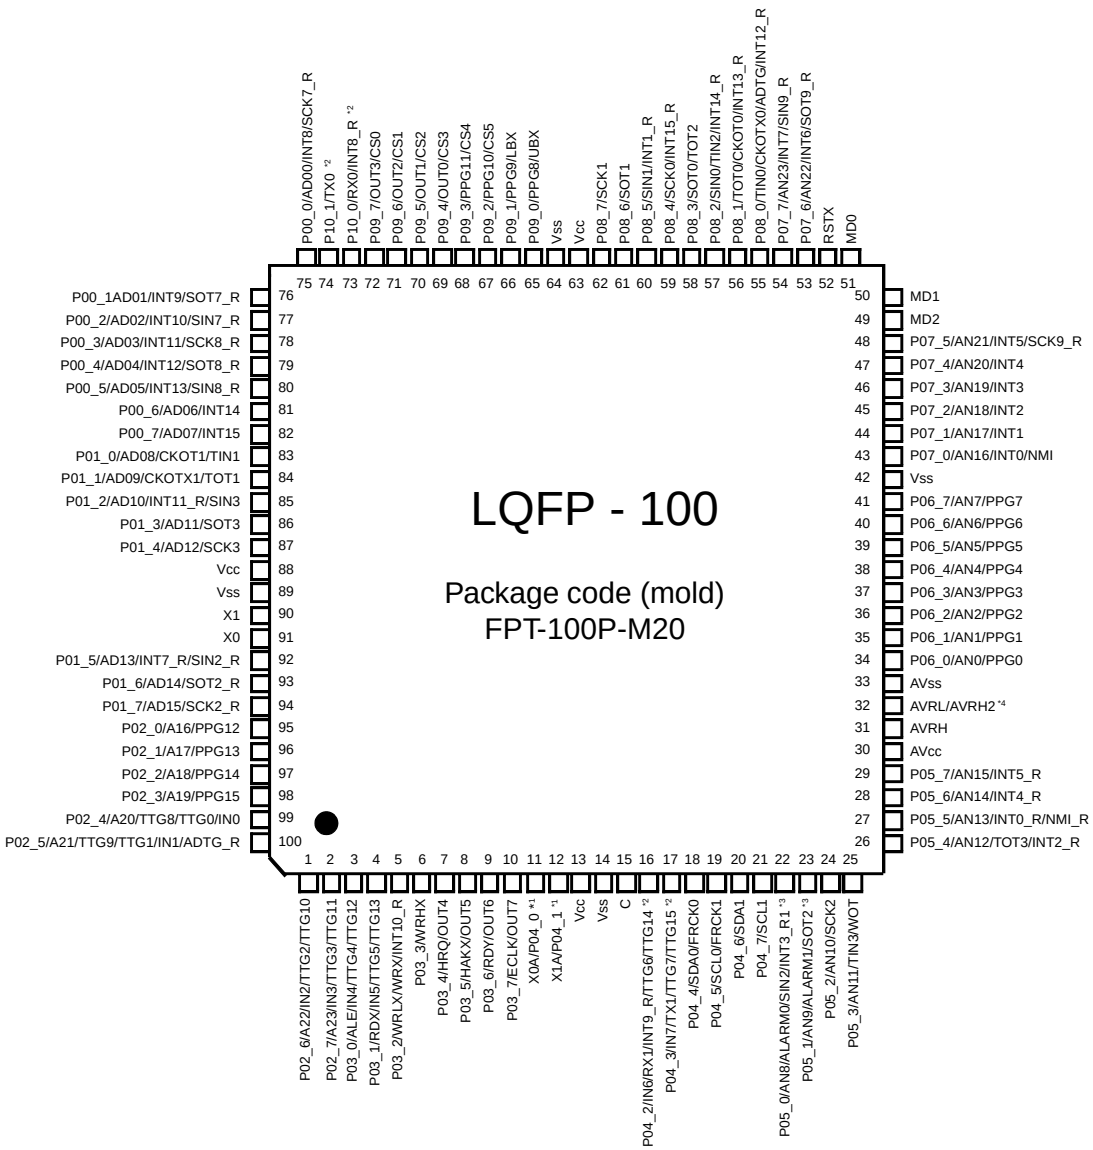

*1: MB96(F)34xyWy: X0A, X1A
MB96(F)34xySy: P04_0, P04_1

*2: TX0, RX0, TX1, RX1 are not available on MB96(F)34xAyy or MB96(F)34xCyy
TX1, RX1 are not available on MB96F345Dyy or MB96F345Fyy

*3: ALARM0, ALARM1 are not available on MB96F345Dyy or MB96F345Fyy

*4: AVRH2 is not available on MB96F345Dyy or MB96F345Fyy

(FPT-100P-M20)

Remark:

MB96(F)34x products are pin-compatible to F²MC-16LX family MB90340 series.

Downloaded from Arrow.com.

■ PIN FUNCTION DESCRIPTION

Pin Function description (1/2)

Pin name	Feature	Description
ADn	External bus	External bus interface (multiplexed mode) address output and data input/output
ADTG	ADC	A/D converter trigger input
ADTG_R	ADC	Relocated A/D converter trigger input
ALARMn	Alarm comparator	Alarm Comparator n input
ALE	External bus	External bus Address Latch Enable output
An	External bus	External bus address output
ANn	ADC	A/D converter channel n input
AV_{CC}	Supply	Analog circuits power supply
AVRH	ADC	A/D converter high reference voltage input
AVRH2	ADC	Alternative A/D converter high reference voltage input
AVRL	ADC	A/D converter low reference voltage input
AV_{SS}	Supply	Analog circuits power supply
C	Voltage regulator	Internally regulated power supply stabilization capacitor pin
CKOTn	Clock output function	Clock Output function n output
CKOTXn	Clock output function	Clock Output function n inverted output
ECLK	External bus	External bus clock output
CSn	External bus	External bus chip select n output
FRCKn	Free Running Timer	Free Running Timer n input
HAKX	External bus	External bus Hold Acknowledge
HRQ	External bus	External bus Hold Request
INn	ICU	Input Capture Unit n input
INTn	External Interrupt	External Interrupt n input
INTn_R	External Interrupt	Relocated External Interrupt n input
LBX	External bus	External Bus Interface Lower Byte select strobe output
MDn	Core	Input pins for specifying the operating mode.
NMI	External Interrupt	Non-Maskable Interrupt input
NMI_R	External Interrupt	Relocated Non-Maskable Interrupt input
OUTn	OCU	Output Compare Unit n waveform output

Downloaded from Arrow.com.

Pin Function description (2/2)

Pin name	Feature	Description
Pxx_n	GPIO	General purpose IO
PPGn	PPG	Programmable Pulse Generator n output
RDX	External bus	External bus interface read strobe output
RDY	External bus	External bus interface external wait state request input
RSTX	Core	Reset input
RXn	CAN	CAN interface n RX input
SCKn	USART	USART n serial clock input/output
SCKn_R	USART	Relocated USART n serial clock input/output
SCLn	I2C	I2C interface n clock I/O input/output
SDAn	I2C	I2C interface n serial data I/O input/output
SINn	USART	USART n serial data input
SINn_R	USART	Relocated USART n serial data input
SOTn	USART	USART n serial data output
SOTn_R	USART	Relocated USART n serial data output
TINn	Reload Timer	Reload Timer n event input
TOTn	Reload Timer	Reload Timer n output
TTGn	PPG	Programmable Pulse Generator n trigger input
TXn	CAN	CAN interface n TX output
UBX	External bus	External Bus Interface Upper Byte select strobe output
V_{CC}	Supply	Power supply
V_{SS}	Supply	Power supply
WOT	RTC	Real Timer clock output
WRHX	External bus	External bus High byte write strobe output
WRLX/WRX	External bus	External bus Low byte / Word write strobe output
X0	Clock	Oscillator input
X0A	Clock	Subclock Oscillator input (only for devices with suffix "W")
X1	Clock	Oscillator output
X1A	Clock	Subclock Oscillator output (only for devices with suffix "W")

Downloaded from Arrow.com.

■ PIN CIRCUIT TYPE

Pin circuit types





FPT-100P-M20	
Pin no.	Circuit type *1
1-10	H
11,12	B *2
11,12	H *3
13,14	Supply
15	F
16,17	H
18-21	N
22-29	I
30	Supply
31-32	G
33	Supply
34 to 41	I
42	Supply
43 to 48	I
49 to 51	C
52	E
53 to 54	I
55 to 62	H
63, 64	Supply
65 to 87	H
88,89	Supply
90, 91	A
92-100	H

FPT-100P-M22	
Pin no.	Circuit type *1
1-12	H
13, 14	B *2
13, 14	H *3
15,16	Supply
17	F
18,19	H
20-23	N
24-31	I
32	Supply
33-34	G
35	Supply
36 to 43	I
44	Supply
45 to 50	I
51 to 53	C
54	E
55 to 56	I
57 to 64	H
65, 66	Supply
67 to 89	H
90, 91	Supply
92, 93	A
94 to 100	H




*1: Please refer to “■ I/O CIRCUIT TYPE” for details on the I/O circuit types
*2: Devices with suffix ”W”
*3: Devices without suffix ”W”

Downloaded from Arrow.com.



■ I/O CIRCUIT TYPE

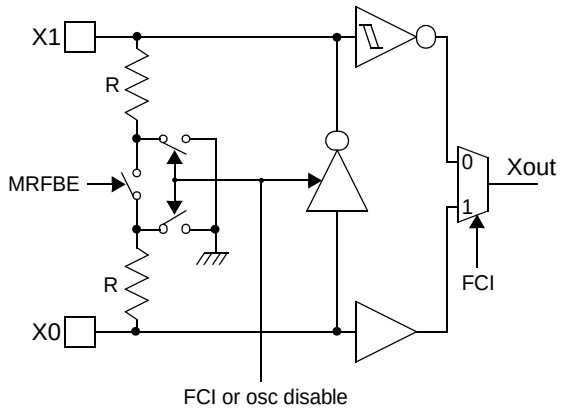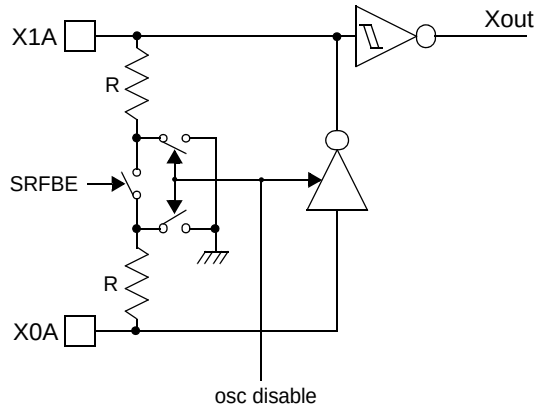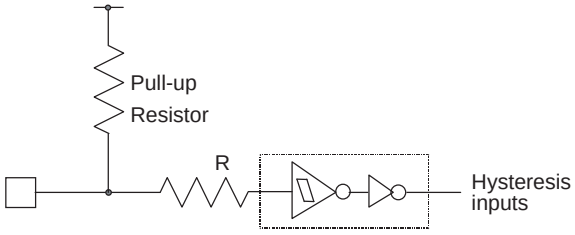Type	Circuit	Remarks
A		High-speed oscillation circuit: • Programmable between oscillation mode (external crystal or resonator connected to X0/X1 pins) and Fast external Clock Input (FCI) mode (external clock connected to X0 pin) • Programmable feedback resistor = approx. 2 * 0.5 MΩ. Feedback resistor is grounded in the center when the oscillator is disabled or in FCI mode
B		Low-speed oscillation circuit: • Programmable feedback resistor = approx. 2 * 5 MΩ. Feedback resistor is grounded in the center when the oscillator is disabled
C		• Mask ROM and EVA device: CMOS Hysteresis input pin • Flash device: CMOS input pin
E		• CMOS Hysteresis input pin • Pull-up resistor value: approx. 50 kΩ

Downloaded from Arrow.com.

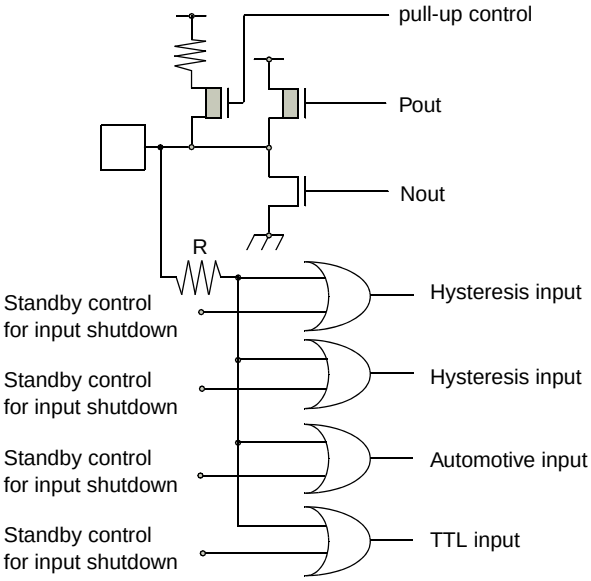
Type	Circuit	Remarks
F		• Power supply input protection circuit
G		• A/D converter ref+ (AVRH/AVRH2) power supply input pin with protection circuit • Flash devices do not have a protection circuit against VCC for pins AVRH/AVRH2 • Devices without AVRH reference switch do not have an analog switch for the AVRL pin
H		• CMOS level output (programmable I_{OL} = 5mA, I_{OH} = -5mA and I_{OL} = 2mA, I_{OH} = -2mA) • 2 different CMOS hysteresis inputs with input shutdown function * • Automotive input with input shutdown function • TTL input with input shutdown function * • Programmable pull-up resistor: 50kΩ approx. * MB96F345Dyy or MB96F345Fyy: Only Automotive input and CMOS hysteresis input (0.7/0.3) are supported

Downloaded from Arrow.com.

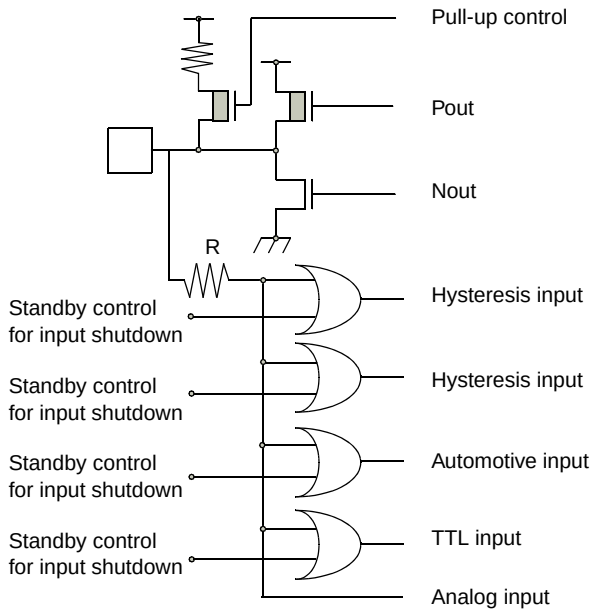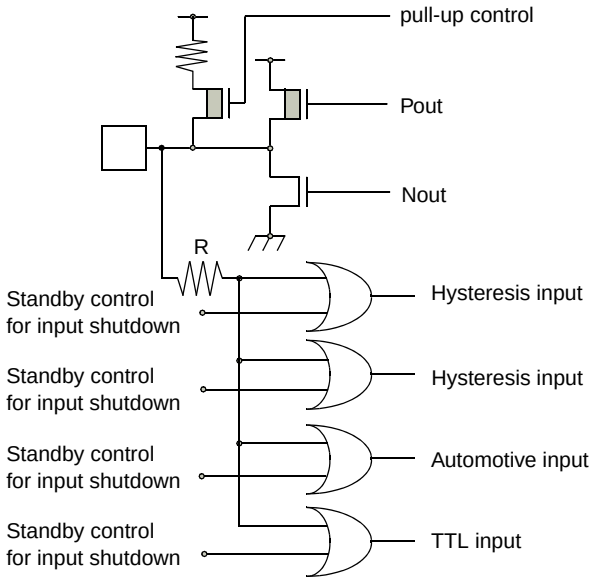Type	Circuit	Remarks
I		• CMOS level output (programmable I_{OL} = 5mA, I_{OH} = -5mA and I_{OL} = 2mA, I_{OH} = -2mA) • 2 different CMOS hysteresis inputs with input shutdown function * • Automotive input with input shutdown function • TTL input with input shutdown function * • Programmable pull-up resistor: 50kΩ approx. • Analog input * MB96F345Dyy or MB96F345Fyy: Only Automotive input and CMOS hysteresis input (0.7/0.3) are supported
N		• CMOS level output (I_{OL} = 3mA, I_{OH} = -3mA) • 2 different CMOS hysteresis inputs with input shutdown function * • Automotive input with input shutdown function • TTL input with input shutdown function * • Programmable pull-up resistor: 50kΩ approx. * MB96F345Dyy or MB96F345Fyy: Only Automotive input and CMOS hysteresis input (0.7/0.3) are supported

Downloaded from Arrow.com.

■ MEMORY MAP

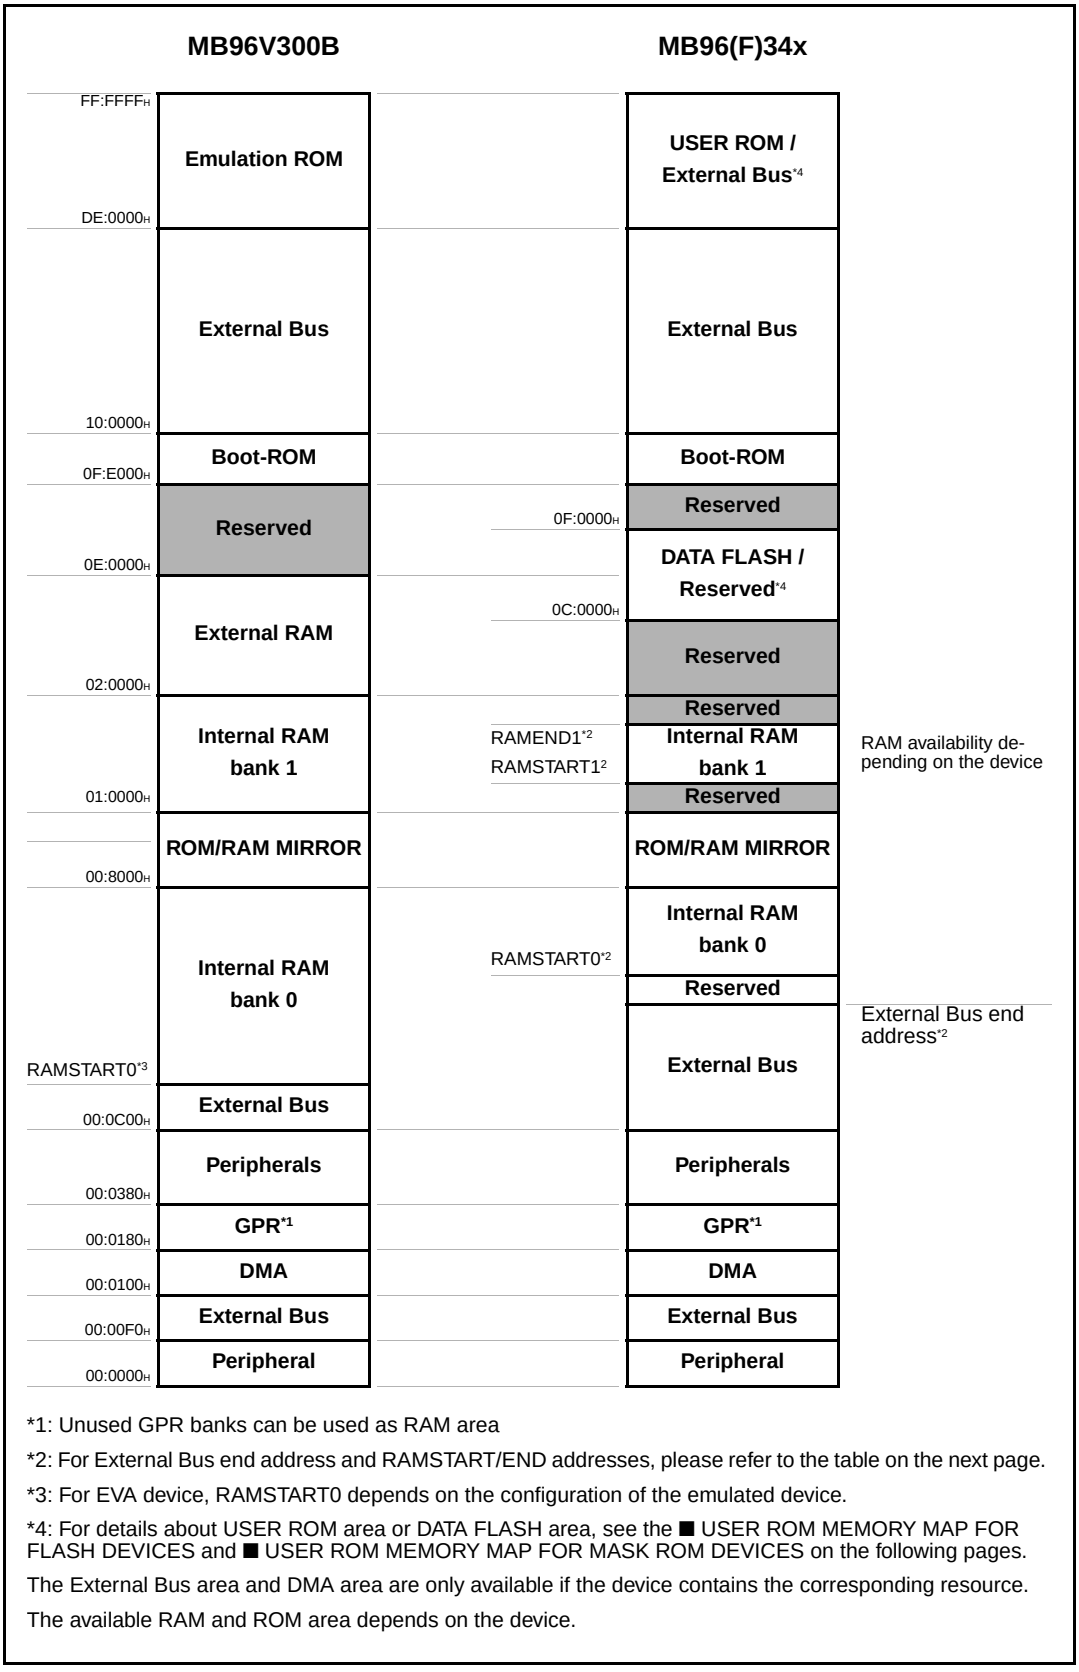

*1: Unused GPR banks can be used as RAM area

*2: For External Bus end address and RAMSTART/END addresses, please refer to the table on the next page.

*3: For EVA device, RAMSTART0 depends on the configuration of the emulated device.

*4: For details about USER ROM area or DATA FLASH area, see the ■ USER ROM MEMORY MAP FOR FLASH DEVICES and ■ USER ROM MEMORY MAP FOR MASK ROM DEVICES on the following pages.

The External Bus area and DMA area are only available if the device contains the corresponding resource.

The available RAM and ROM area depends on the device.

Downloaded from Arrow.com.

■ RAMSTART/END AND EXTERNAL BUS END ADDRESSES

Devices	Bank 0 RAM size	Bank 1 RAM size	External Bus end address	RAMSTART0	RAMSTART1	RAMEND1
MB96(F)345	8KByte	-	00:21FF$_H$	00:6240$_H$	-	-
MB96(F)346, MB96F347	16KByte	-	00:21FF$_H$	00:4240$_H$	-	-
MB96F348	24KByte	-	00:21FF$_H$	00:2240$_H$	-	-

Downloaded from Arrow.com.

■ USER ROM MEMORY MAP FOR FLASH DEVICES


MB96F345D
MB96F345F

Alternative mode CPU address	Flash memory mode address	Flash size 160kByte +64KByte Data Flash	
FF:FFFF$_H$ FF:0000$_H$	3F:FFFF$_H$ 3F:0000$_H$	S39 - 64K	Flash A
FE:FFFF$_H$ FE:0000$_H$	3E:FFFF$_H$ 3E:0000$_H$	S38 - 64K	
FD:FFFF$_H$ FD:0000$_H$	3D:FFFF$_H$ 3D:0000$_H$	External bus	
FC:FFFF$_H$ FC:0000$_H$	3C:FFFF$_H$ 3C:0000$_H$		
FB:FFFF$_H$ FB:0000$_H$	3B:FFFF$_H$ 3B:0000$_H$		
FA:FFFF$_H$ FA:0000$_H$	3A:FFFF$_H$ 3A:0000$_H$		
F9:FFFF$_H$ F9:0000$_H$	39:FFFF$_H$ 39:0000$_H$		
F8:FFFF$_H$ F8:0000$_H$	38:FFFF$_H$ 38:0000$_H$		
F7:FFFF$_H$ F7:0000$_H$	37:FFFF$_H$ 37:0000$_H$		
F6:FFFF$_H$ F6:0000$_H$	36:FFFF$_H$ 36:0000$_H$		
F5:FFFF$_H$ F5:0000$_H$	35:FFFF$_H$ 35:0000$_H$		
F4:FFFF$_H$ F4:0000$_H$	34:FFFF$_H$ 34:0000$_H$		
F3:FFFF$_H$ F3:0000$_H$	33:FFFF$_H$ 33:0000$_H$		
F2:FFFF$_H$ F2:0000$_H$	32:FFFF$_H$ 32:0000$_H$		
F1:FFFF$_H$ F1:0000$_H$	31:FFFF$_H$ 31:0000$_H$		
F0:FFFF$_H$ F0:0000$_H$	30:FFFF$_H$ 30:0000$_H$		
E0:FFFF$_H$ E0:0000$_H$			
DF:FFFF$_H$ DF:8000$_H$		Reserved	
DF:7FFF$_H$ DF:6000$_H$	1F:7FFF$_H$ 1F:6000$_H$	SA3 - 8K	Flash A
DF:5FFF$_H$ DF:4000$_H$	1F:5FFF$_H$ 1F:4000$_H$	SA2 - 8K	
DF:3FFF$_H$ DF:2000$_H$	1F:3FFF$_H$ 1F:2000$_H$	SA1 - 8K	
DF:1FFF$_H$ DF:0000$_H$	1F:1FFF$_H$ 1F:0000$_H$	SA0 - 8K *1	
DE:FFFF$_H$ DE:0000$_H$		Reserved	
0E:FFFF$_H$ 0E:FF00$_H$	(0E:FFFF$_H$) (0E:FF00$_H$)	SDA0-256 *2	Data Flash A
0E:FEFF$_H$ 0E:0000$_H$		Reserved	
0D:FFFF$_H$ 0D:C000$_H$	(0F:FFFF$_H$) (0F:C000$_H$)	SDA4-16K	Data Flash A
0D:BFFF$_H$ 0D:8000$_H$	(0F:BFFF$_H$) (0F:8000$_H$)	SDA3-16K	
0D:7FFF$_H$ 0D:4000$_H$	(0F:7FFF$_H$) (0F:4000$_H$)	SDA2-16K	
0D:3FFF$_H$ 0D:0000$_H$	(0F:3FFF$_H$) (0F:0000$_H$)	SDA1-16K	
0C:FFFF$_H$ 0C:0000$_H$		Reserved	

*1: Sector SA0 contains the ROM Configuration Block RCBA at CPU address DF:0000$_H$ - DF:007F$_H$


*2: Sector SDA0 contains the ROM Configuration Block RCBDA at CPU address DE:FF00$_H$ - DE:FF2F$_H$

Downloaded from Arrow.com.

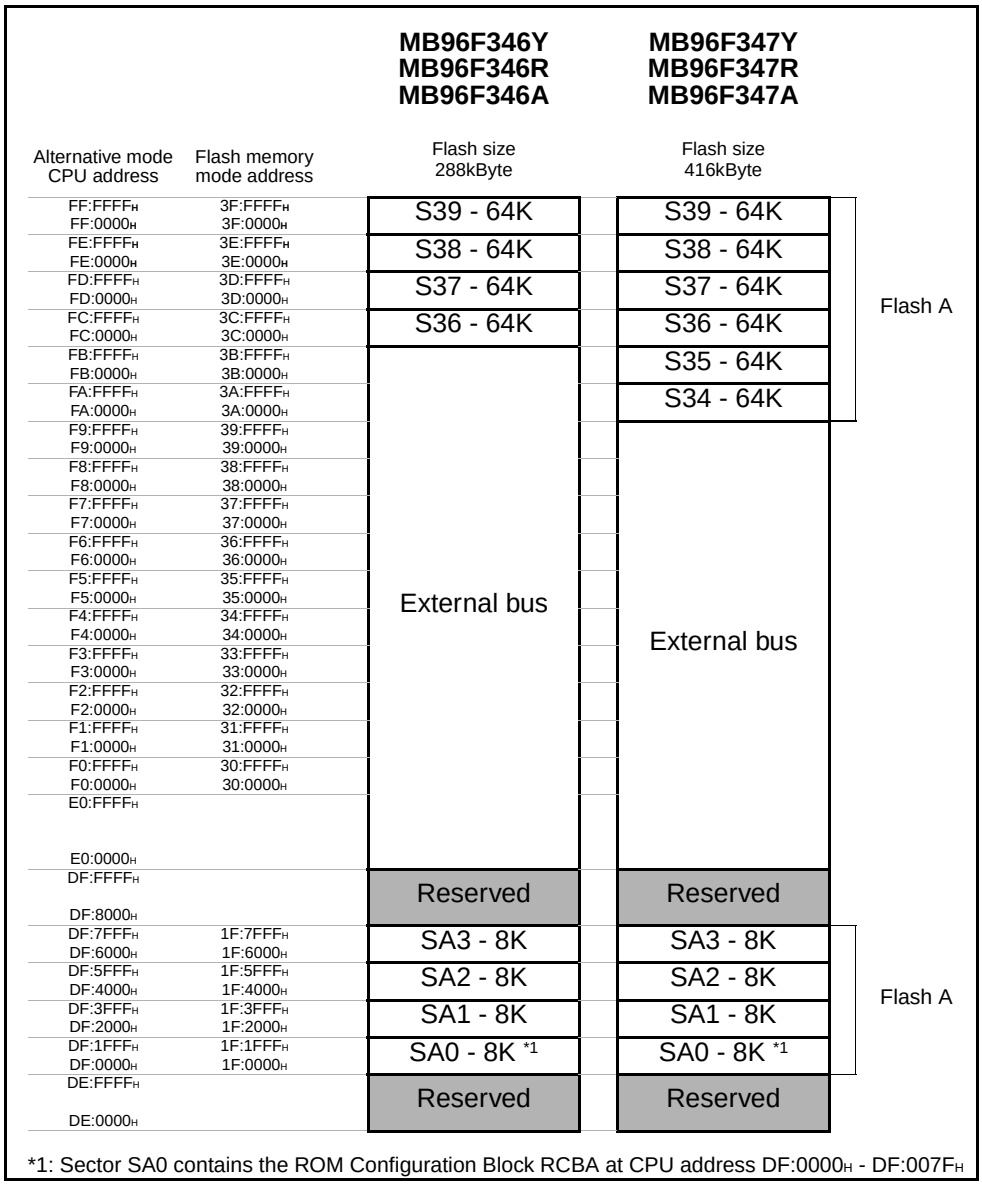

*1: Sector SA0 contains the ROM Configuration Block RCBA at CPU address DF:0000H - DF:007FH

Downloaded from Arrow.com.

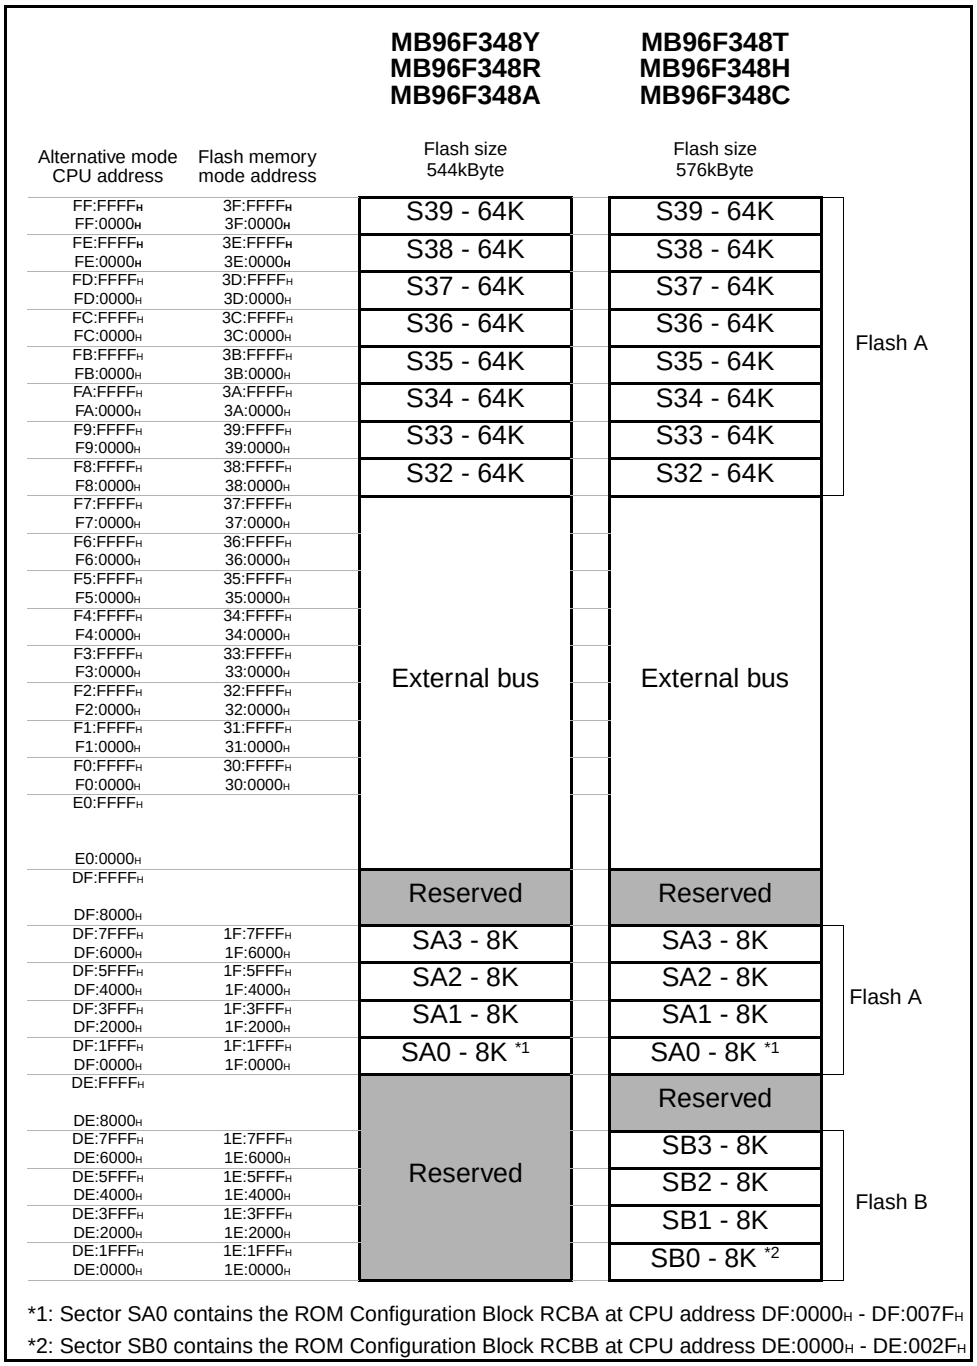


*1: Sector SA0 contains the ROM Configuration Block RCBA at CPU address DF:0000H - DF:007FH

*2: Sector SB0 contains the ROM Configuration Block RCBB at CPU address DE:0000H - DE:002FH

Downloaded from Arrow.com.

■ USER ROM MEMORY MAP FOR MASK ROM DEVICES

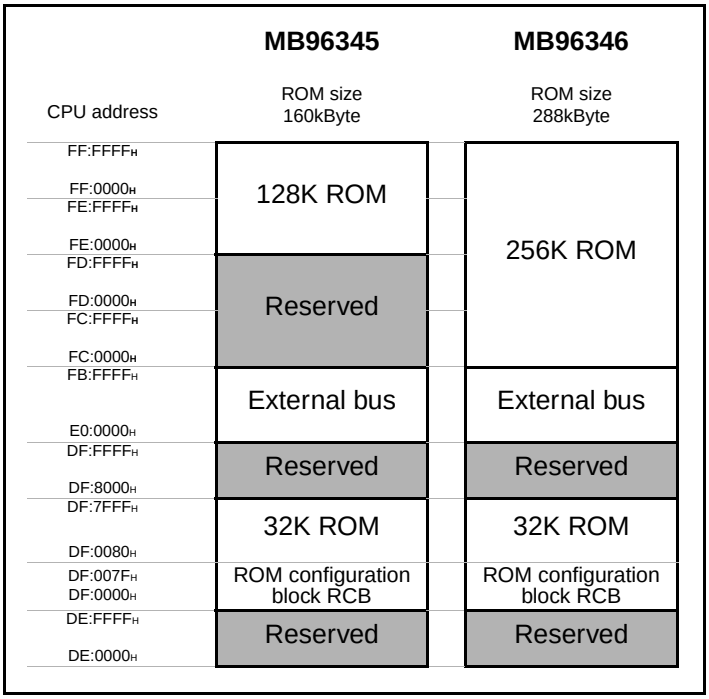

Downloaded from Arrow.com.

■ SERIAL PROGRAMMING COMMUNICATION INTERFACE

USART pins for Flash serial programming (MD[2:0] = 010, Serial Communication mode)

MB96F34x			
Pin number	Pin number	USART Number	Normal function
LQFP-100	QFP-100		
57	59	USART0	SIN0
58	60		SOT0
59	61		SCK0
60	62	USART1	SIN1
61	63		SOT1
62	64		SCK1
22	24	USART2	SIN2
23	25		SOT2
24	26		SCK2
85	87	USART3	SIN3
86	88		SOT3
87	89		SCK3

Note: If a Flash programmer and its software needs to use a handshaking pin, Fujitsu suggests to the tool vendor to support at least port P00_1 on pin 76/78.
If handshaking is used by the tool but P00_1 is not available in customer's application, Fujitsu suggests to the customer to check the tool manual or to contact the tool vendor for alternative handshaking pins.

Downloaded from Arrow.com.

■ I/O MAP

I/O map MB96(F)34x (1/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000000H	I/O Port P00 - Port Data Register	PDR00		R/W
000001H	I/O Port P01 - Port Data Register	PDR01		R/W
000002H	I/O Port P02 - Port Data Register	PDR02		R/W
000003H	I/O Port P03 - Port Data Register	PDR03		R/W
000004H	I/O Port P04 - Port Data Register	PDR04		R/W
000005H	I/O Port P05 - Port Data Register	PDR05		R/W
000006H	I/O Port P06 - Port Data Register	PDR06		R/W
000007H	I/O Port P07 - Port Data Register	PDR07		R/W
000008H	I/O Port P08 - Port Data Register	PDR08		R/W
000009H	I/O Port P09 - Port Data Register	PDR09		R/W
00000AH	I/O Port P10 - Port Data Register	PDR10		R/W
00000BH-000017H	Reserved			-
000018H	ADC0 - Control Status register Low	ADCSL	ADCS	R/W
000019H	ADC0 - Control Status register High	ADCSH		R/W
00001AH	ADC0 - Data Register Low	ADCRL	ADCR	R
00001BH	ADC0 - Data Register High	ADCRH		R
00001CH	ADC0 - Setting Register		ADSR	R/W
00001DH	ADC0 - Setting Register			R/W
00001EH	ADC0 - Extended Configuration Register	ADECR		R/W
00001FH	Reserved			-
000020H	FRT0 - Data register of free-running timer		TCDT0	R/W
000021H	FRT0 - Data register of free-running timer			R/W
000022H	FRT0 - Control status register of free-running timer Low	TCCSL0	TCCS0	R/W
000023H	FRT0 - Control status register of free-running timer High	TCCSH0		R/W
000024H	FRT1 - Data register of free-running timer		TCDT1	R/W
000025H	FRT1 - Data register of free-running timer			R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (2/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000026H	FRT1 - Control status register of free-running timer Low	TCCSL1	TCCS1	R/W
000027H	FRT1 - Control status register of free-running timer High	TCCSH1		R/W
000028H	OCU0 - Output Compare Control Status	OCS0		R/W
000029H	OCU1 - Output Compare Control Status	OCS1		R/W
00002AH	OCU0 - Compare Register		OCCP0	R/W
00002BH	OCU0 - Compare Register			R/W
00002CH	OCU1 - Compare Register		OCCP1	R/W
00002DH	OCU1 - Compare Register			R/W
00002EH	OCU2 - Output Compare Control Status	OCS2		R/W
00002FH	OCU3 - Output Compare Control Status	OCS3		R/W
000030H	OCU2 - Compare Register		OCCP2	R/W
000031H	OCU2 - Compare Register			R/W
000032H	OCU3 - Compare Register		OCCP3	R/W
000033H	OCU3 - Compare Register			R/W
000034H	OCU4 - Output Compare Control Status	OCS4		R/W
000035H	OCU5 - Output Compare Control Status	OCS5		R/W
000036H	OCU4 - Compare Register		OCCP4	R/W
000037H	OCU4 - Compare Register			R/W
000038H	OCU5 - Compare Register		OCCP5	R/W
000039H	OCU5 - Compare Register			R/W
00003AH	OCU6 - Output Compare Control Status	OCS6		R/W
00003BH	OCU7 - Output Compare Control Status	OCS7		R/W
00003CH	OCU6 - Compare Register		OCCP6	R/W
00003DH	OCU6 - Compare Register			R/W
00003EH	OCU7 - Compare Register		OCCP7	R/W
00003FH	OCU7 - Compare Register			R/W
000040H	ICU0/ICU1 - Control Status Register	ICS01		R/W
000041H	ICU0/ICU1 - Edge register	ICE01		R/W
000042H	ICU0 - Capture Register Low	IPCPL0	IPCP0	R

Downloaded from Arrow.com.

I/O map MB96(F)34x (3/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000043H	ICU0 - Capture Register High	IPCPH0		R
000044H	ICU1 - Capture Register Low	IPCPL1	IPCP1	R
000045H	ICU1 - Capture Register High	IPCPH1		R
000046H	ICU2/ICU3 - Control Status Register	ICS23		R/W
000047H	ICU2/ICU3 - Edge register	ICE23		R/W
000048H	ICU2 - Capture Register Low	IPCPL2	IPCP2	R
000049H	ICU2 - Capture Register High	IPCPH2		R
00004AH	ICU3 - Capture Register Low	IPCPL3	IPCP3	R
00004BH	ICU3 - Capture Register High	IPCPH3		R
00004CH	ICU4/ICU5 - Control Status Register	ICS45		R/W
00004DH	ICU4/ICU5 - Edge register	ICE45		R/W
00004EH	ICU4 - Capture Register Low	IPCPL4	IPCP4	R
00004FH	ICU4 - Capture Register High	IPCPH4		R
000050H	ICU5 - Capture Register Low	IPCPL5	IPCP5	R
000051H	ICU5 - Capture Register High	IPCPH5		R
000052H	ICU6/ICU7 - Control Status Register	ICS67		R/W
000053H	ICU6/ICU7 - Edge register	ICE67		R/W
000054H	ICU6 - Capture Register Low	IPCPL6	IPCP6	R
000055H	ICU6 - Capture Register High	IPCPH6		R
000056H	ICU7 - Capture Register Low	IPCPL7	IPCP7	R
000057H	ICU7 - Capture Register High	IPCPH7		R
000058H	EXTINT0 - External Interrupt Enable Register	ENIR0		R/W
000059H	EXTINT0 - External Interrupt Interrupt request Register	EIRR0		R/W
00005AH	EXTINT0 - External Interrupt Level Select Low	ELVRL0	ELVR0	R/W
00005BH	EXTINT0 - External Interrupt Level Select High	ELVRH0		R/W
00005CH	EXTINT1 - External Interrupt Enable Register	ENIR1		R/W
00005DH	EXTINT1 - External Interrupt Interrupt request Register	EIRR1		R/W
00005EH	EXTINT1 - External Interrupt Level Select Low	ELVRL1	ELVR1	R/W
00005FH	EXTINT1 - External Interrupt Level Select High	ELVRH1		R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (4/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000060H	RLT0 - Timer Control Status Register Low	TMCSRL0	TMCSR0	R/W
000061H	RLT0 - Timer Control Status Register High	TMCSRH0		R/W
000062H	RLT0 - Reload Register - for writing		TMRLR0	W
000062H	RLT0 - Reload Register - for reading		TMR0	R
000063H	RLT0 - Reload Register - for writing			W
000063H	RLT0 - Reload Register - for reading			R
000064H	RLT1 - Timer Control Status Register Low	TMCSRL1	TMCSR1	R/W
000065H	RLT1 - Timer Control Status Register High	TMCSRH1		R/W
000066H	RLT1 - Reload Register - for writing		TMRLR1	W
000066H	RLT1 - Reload Register - for reading		TMR1	R
000067H	RLT1 - Reload Register - for writing			W
000067H	RLT1 - Reload Register - for reading			R
000068H	RLT2 - Timer Control Status Register Low	TMCSRL2	TMCSR2	R/W
000069H	RLT2 - Timer Control Status Register High	TMCSRH2		R/W
00006AH	RLT2 - Reload Register - for writing		TMRLR2	W
00006AH	RLT2 - Reload Register - for reading		TMR2	R
00006BH	RLT2 - Reload Register - for writing			W
00006BH	RLT2 - Reload Register - for reading			R
00006CH	RLT3 - Timer Control Status Register Low	TMCSRL3	TMCSR3	R/W
00006DH	RLT3 - Timer Control Status Register High	TMCSRH3		R/W
00006EH	RLT3 - Reload Register - for writing		TMRLR3	W
00006EH	RLT3 - Reload Register - for reading		TMR3	R
00006FH	RLT3 - Reload Register - for writing			W
00006FH	RLT3 - Reload Register - for reading			R
000070H	RLT6 - Timer Control Status Register Low (dedic. RLT for PPG)	TMCSRL6	TMCSR6	R/W
000071H	RLT6 - Timer Control Status Register High (dedic. RLT for PPG)	TMCSRH6		R/W
000072H	RLT6 - Reload Register (dedic. RLT for PPG) - for writing		TMRLR6	W

Downloaded from Arrow.com.

I/O map MB96(F)34x (5/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000072H	RLT6 - Reload Register (dedic. RLT for PPG) - for reading		TMR6	R
000073H	RLT6 - Reload Register (dedic. RLT for PPG) - for writing			W
000073H	RLT6 - Reload Register (dedic. RLT for PPG) - for reading			R
000074H	PPG3-PPG0 - General Control register 1 Low	GCN1L0	GCN10	R/W
000075H	PPG3-PPG0 - General Control register 1 High	GCN1H0		R/W
000076H	PPG3-PPG0 - General Control register 2 Low	GCN2L0	GCN20	R/W
000077H	PPG3-PPG0 - General Control register 2 High	GCN2H0		R/W
000078H	PPG0 - Timer register		PTMR0	R
000079H	PPG0 - Timer register			R
00007AH	PPG0 - Period setting register		PCSR0	W
00007BH	PPG0 - Period setting register			W
00007CH	PPG0 - Duty cycle register		PDUT0	W
00007DH	PPG0 - Duty cycle register			W
00007EH	PPG0 - Control status register Low	PCNL0	PCN0	R/W
00007FH	PPG0 - Control status register High	PCNH0		R/W
000080H	PPG1 - Timer register		PTMR1	R
000081H	PPG1 - Timer register			R
000082H	PPG1 - Period setting register		PCSR1	W
000083H	PPG1 - Period setting register			W
000084H	PPG1 - Duty cycle register		PDUT1	W
000085H	PPG1 - Duty cycle register			W
000086H	PPG1 - Control status register Low	PCNL1	PCN1	R/W
000087H	PPG1 - Control status register High	PCNH1		R/W
000088H	PPG2 - Timer register		PTMR2	R
000089H	PPG2 - Timer register			R
00008AH	PPG2 - Period setting register		PCSR2	W
00008BH	PPG2 - Period setting register			W
00008CH	PPG2 - Duty cycle register		PDUT2	W

Downloaded from Arrow.com.

I/O map MB96(F)34x (6/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
00008D$_H$	PPG2 - Duty cycle register			W
00008E$_H$	PPG2 - Control status register Low	PCNL2	PCN2	R/W
00008F$_H$	PPG2 - Control status register High	PCNH2		R/W
000090$_H$	PPG3 - Timer register		PTMR3	R
000091$_H$	PPG3 - Timer register			R
000092$_H$	PPG3 - Period setting register		PCSR3	W
000093$_H$	PPG3 - Period setting register			W
000094$_H$	PPG3 - Duty cycle register		PDUT3	W
000095$_H$	PPG3 - Duty cycle register			W
000096$_H$	PPG3 - Control status register Low	PCNL3	PCN3	R/W
000097$_H$	PPG3 - Control status register High	PCNH3		R/W
000098$_H$	PPG7-PPG4 - General Control register 1 Low	GCN1L1	GCN11	R/W
000099$_H$	PPG7-PPG4 - General Control register 1 High	GCN1H1		R/W
00009A$_H$	PPG7-PPG4 - General Control register 2 Low	GCN2L1	GCN21	R/W
00009B$_H$	PPG7-PPG4 - General Control register 2 High	GCN2H1		R/W
00009C$_H$	PPG4 - Timer register		PTMR4	R
00009D$_H$	PPG4 - Timer register			R
00009E$_H$	PPG4 - Period setting register		PCSR4	W
00009F$_H$	PPG4 - Period setting register			W
0000A0$_H$	PPG4 - Duty cycle register		PDUT4	W
0000A1$_H$	PPG4 - Duty cycle register			W
0000A2$_H$	PPG4 - Control status register Low	PCNL4	PCN4	R/W
0000A3$_H$	PPG4 - Control status register High	PCNH4		R/W
0000A4$_H$	PPG5 - Timer register		PTMR5	R
0000A5$_H$	PPG5 - Timer register			R
0000A6$_H$	PPG5 - Period setting register		PCSR5	W
0000A7$_H$	PPG5 - Period setting register			W
0000A8$_H$	PPG5 - Duty cycle register		PDUT5	W
0000A9$_H$	PPG5 - Duty cycle register			W
0000AA$_H$	PPG5 - Control status register Low	PCNL5	PCN5	R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (7/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
0000AB$_H$	PPG5 - Control status register High	PCNH5		R/W
0000AC$_H$	I2C0 - Bus Status Register	IBSR0		R
0000AD$_H$	I2C0 - Bus Control Register	IBCR0		R/W
0000AE$_H$	I2C0 - Ten bit Slave address Register Low	ITBAL0	ITBA0	R/W
0000AF$_H$	I2C0 - Ten bit Slave address Register High	ITBAH0		R/W
0000B0$_H$	I2C0 - Ten bit Address mask Register Low	ITMKL0	ITMK0	R/W
0000B1$_H$	I2C0 - Ten bit Address mask Register High	ITMKH0		R/W
0000B2$_H$	I2C0 - Seven bit Slave address Register	ISBA0		R/W
0000B3$_H$	I2C0 - Seven bit Address mask Register	ISMK0		R/W
0000B4$_H$	I2C0 - Data Register	IDAR0		R/W
0000B5$_H$	I2C0 - Clock Control Register	ICCR0		R/W
0000B6$_H$	I2C1 - Bus Status Register	IBSR1		R
0000B7$_H$	I2C1 - Bus Control Register	IBCR1		R/W
0000B8$_H$	I2C1 - Ten bit Slave address Register Low	ITBAL1	ITBA1	R/W
0000B9$_H$	I2C1 - Ten bit Slave address Register High	ITBAH1		R/W
0000BA$_H$	I2C1 - Ten bit Address mask Register Low	ITMKL1	ITMK1	R/W
0000BB$_H$	I2C1 - Ten bit Address mask Register High	ITMKH1		R/W
0000BC$_H$	I2C1 - Seven bit Slave address Register	ISBA1		R/W
0000BD$_H$	I2C1 - Seven bit Address mask Register	ISMK1		R/W
0000BE$_H$	I2C1 - Data Register	IDAR1		R/W
0000BF$_H$	I2C1 - Clock Control Register	ICCR1		R/W
0000C0$_H$	USART0 - Serial Mode Register	SMR0		R/W
0000C1$_H$	USART0 - Serial Control Register	SCR0		R/W
0000C2$_H$	USART0 - TX Register	TDR0		W
0000C2$_H$	USART0 - RX Register	RDR0		R
0000C3$_H$	USART0 - Serial Status	SSR0		R/W
0000C4$_H$	USART0 - Control/Com. Register	ECCR0		R/W
0000C5$_H$	USART0 - Ext. Status Register	ESCR0		R/W
0000C6$_H$	USART0 - Baud Rate Generator Register Low	BGRL0	BGR0	R/W
0000C7$_H$	USART0 - Baud Rate Generator Register High	BGRH0		R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (8/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
0000C8H	USART0 - Extended Serial Interrupt Register	ESIR0		R/W
0000C9H	Reserved			-
0000CAH	USART1 - Serial Mode Register	SMR1		R/W
0000CBH	USART1 - Serial Control Register	SCR1		R/W
0000CCH	USART1 - TX Register	TDR1		W
0000CCH	USART1 - RX Register	RDR1		R
0000CDH	USART1 - Serial Status	SSR1		R/W
0000CEH	USART1 - Control/Com. Register	ECCR1		R/W
0000CFH	USART1 - Ext. Status Register	ESCR1		R/W
0000D0H	USART1 - Baud Rate Generator Register Low	BGRL1	BGR1	R/W
0000D1H	USART1 - Baud Rate Generator Register High	BGRH1		R/W
0000D2H	USART1 - Extended Serial Interrupt Register	ESIR1		R/W
0000D3H	Reserved			-
0000D4H	USART2 - Serial Mode Register	SMR2		R/W
0000D5H	USART2 - Serial Control Register	SCR2		R/W
0000D6H	USART2 - TX Register	TDR2		W
0000D6H	USART2 - RX Register	RDR2		R
0000D7H	USART2 - Serial Status	SSR2		R/W
0000D8H	USART2 - Control/Com. Register	ECCR2		R/W
0000D9H	USART2 - Ext. Status Register	ESCR2		R/W
0000DAH	USART2 - Baud Rate Generator Register Low	BGRL2	BGR2	R/W
0000DBH	USART2 - Baud Rate Generator Register High	BGRH2		R/W
0000DCH	USART2 - Extended Serial Interrupt Register	ESIR2		R/W
0000DDH	Reserved			-
0000DEH	USART3 - Serial Mode Register	SMR3		R/W
0000DFH	USART3 - Serial Control Register	SCR3		R/W
0000E0H	USART3 - TX Register	TDR3		W
0000E0H	USART3 - RX Register	RDR3		R
0000E1H	USART3 - Serial Status	SSR3		R/W
0000E2H	USART3 - Control/Com. Register	ECCR3		R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (9/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
0000E3H	USART3 - Ext. Status Register	ESCR3		R/W
0000E4H	USART3 - Baud Rate Generator Register Low	BGRL3	BGR3	R/W
0000E5H	USART3 - Baud Rate Generator Register High	BGRH3		R/W
0000E6H	USART3 - Extended Serial Interrupt Register	ESIR3		R/W
0000E7H-0000EFH	Reserved			-
0000F0H-0000FFH	External Bus area	EXTBUS0		R/W
000100H	DMA0 - Buffer address pointer low byte	BAPL0		R/W
000101H	DMA0 - Buffer address pointer middle byte	BAPM0		R/W
000102H	DMA0 - Buffer address pointer high byte	BAPH0		R/W
000103H	DMA0 - DMA control register	DMACS0		R/W
000104H	DMA0 - I/O register address pointer low byte	IOAL0	IOA0	R/W
000105H	DMA0 - I/O register address pointer high byte	IOAH0		R/W
000106H	DMA0 - Data counter low byte	DCTL0	DCT0	R/W
000107H	DMA0 - Data counter high byte	DCTH0		R/W
000108H	DMA1 - Buffer address pointer low byte	BAPL1		R/W
000109H	DMA1 - Buffer address pointer middle byte	BAPM1		R/W
00010AH	DMA1 - Buffer address pointer high byte	BAPH1		R/W
00010BH	DMA1 - DMA control register	DMACS1		R/W
00010CH	DMA1 - I/O register address pointer low byte	IOAL1	IOA1	R/W
00010DH	DMA1 - I/O register address pointer high byte	IOAH1		R/W
00010EH	DMA1 - Data counter low byte	DCTL1	DCT1	R/W
00010FH	DMA1 - Data counter high byte	DCTH1		R/W
000110H	DMA2 - Buffer address pointer low byte	BAPL2		R/W
000111H	DMA2 - Buffer address pointer middle byte	BAPM2		R/W
000112H	DMA2 - Buffer address pointer high byte	BAPH2		R/W
000113H	DMA2 - DMA control register	DMACS2		R/W
000114H	DMA2 - I/O register address pointer low byte	IOAL2	IOA2	R/W
000115H	DMA2 - I/O register address pointer high byte	IOAH2		R/W
000116H	DMA2 - Data counter low byte	DCTL2	DCT2	R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (10/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000117H	DMA2 - Data counter high byte	DCTH2		R/W
000118H	DMA3 - Buffer address pointer low byte	BAPL3		R/W
000119H	DMA3 - Buffer address pointer middle byte	BAPM3		R/W
00011AH	DMA3 - Buffer address pointer high byte	BAPH3		R/W
00011BH	DMA3 - DMA control register	DMACS3		R/W
00011CH	DMA3 - I/O register address pointer low byte	IOAL3	IOA3	R/W
00011DH	DMA3 - I/O register address pointer high byte	IOAH3		R/W
00011EH	DMA3 - Data counter low byte	DCTL3	DCT3	R/W
00011FH	DMA3 - Data counter high byte	DCTH3		R/W
000120H	DMA4 - Buffer address pointer low byte	BAPL4		R/W
000121H	DMA4 - Buffer address pointer middle byte	BAPM4		R/W
000122H	DMA4 - Buffer address pointer high byte	BAPH4		R/W
000123H	DMA4 - DMA control register	DMACS4		R/W
000124H	DMA4 - I/O register address pointer low byte	IOAL4	IOA4	R/W
000125H	DMA4 - I/O register address pointer high byte	IOAH4		R/W
000126H	DMA4 - Data counter low byte	DCTL4	DCT4	R/W
000127H	DMA4 - Data counter high byte	DCTH4		R/W
000128H	DMA5 - Buffer address pointer low byte	BAPL5		R/W
000129H	DMA5 - Buffer address pointer middle byte	BAPM5		R/W
00012AH	DMA5 - Buffer address pointer high byte	BAPH5		R/W
00012BH	DMA5 - DMA control register	DMACS5		R/W
00012CH	DMA5 - I/O register address pointer low byte	IOAL5	IOA5	R/W
00012DH	DMA5 - I/O register address pointer high byte	IOAH5		R/W
00012EH	DMA5 - Data counter low byte	DCTL5	DCT5	R/W
00012FH	DMA5 - Data counter high byte	DCTH5		R/W
000130H-00017FH	Reserved			-
000180H-00037FH	CPU - General Purpose registers (RAM access)	GPR_RAM		R/W
000380H	DMA0 - Interrupt select	DISEL0		R/W
000381H	DMA1 - Interrupt select	DISEL1		R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (11/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000382H	DMA2 - Interrupt select	DISEL2		R/W
000383H	DMA3 - Interrupt select	DISEL3		R/W
000384H	DMA4 - Interrupt select	DISEL4		R/W
000385H	DMA5 - Interrupt select	DISEL5		R/W
000386H-00038FH	Reserved			-
000390H	DMA - Status register low byte	DSRL	DSR	R/W
000391H	DMA - Status register high byte	DSRH		R/W
000392H	DMA - Stop status register low byte	DSSRL	DSSR	R/W
000393H	DMA - Stop status register high byte	DSSRH		R/W
000394H	DMA - Enable register low byte	DERL	DER	R/W
000395H	DMA - Enable register high byte	DERH		R/W
000396H-00039FH	Reserved			-
0003A0H	Interrupt level register	ILR	ICR	R/W
0003A1H	Interrupt index register	IDX		R/W
0003A2H	Interrupt vector table base register Low	TBRL	TBR	R/W
0003A3H	Interrupt vector table base register High	TBRH		R/W
0003A4H	Delayed Interrupt register	DIRR		R/W
0003A5H	Non Maskable Interrupt register	NMI		R/W
0003A6H-0003ABH	Reserved			-
0003ACH	EDSU communication interrupt selection Low	EDSU2L	EDSU2	R/W
0003ADH	EDSU communication interrupt selection High	EDSU2H		R/W
0003AEH	ROM mirror control register	ROMM		R/W
0003AFH	EDSU configuration register	EDSU		R/W
0003B0H	Memory patch control/status register ch 0/1		PFCS0	R/W
0003B1H	Memory patch control/status register ch 0/1			R/W
0003B2H	Memory patch control/status register ch 2/3		PFCS1	R/W
0003B3H	Memory patch control/status register ch 2/3			R/W
0003B4H	Memory patch control/status register ch 4/5		PFCS2	R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (12/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
0003B5H	Memory patch control/status register ch 4/5			R/W
0003B6H	Memory patch control/status register ch 6/7		PFCS3	R/W
0003B7H	Memory patch control/status register ch 6/7			R/W
0003B8H	Memory Patch function - Patch address 0 low	PFAL0		R/W
0003B9H	Memory Patch function - Patch address 0 middle	PFAM0		R/W
0003BAH	Memory Patch function - Patch address 0 high	PFAH0		R/W
0003BBH	Memory Patch function - Patch address 1 low	PFAL1		R/W
0003BCH	Memory Patch function - Patch address 1 middle	PFAM1		R/W
0003BDH	Memory Patch function - Patch address 1 high	PFAH1		R/W
0003BEH	Memory Patch function - Patch address 2 low	PFAL2		R/W
0003BFH	Memory Patch function - Patch address 2 middle	PFAM2		R/W
0003C0H	Memory Patch function - Patch address 2 high	PFAH2		R/W
0003C1H	Memory Patch function - Patch address 3 low	PFAL3		R/W
0003C2H	Memory Patch function - Patch address 3 middle	PFAM3		R/W
0003C3H	Memory Patch function - Patch address 3 high	PFAH3		R/W
0003C4H	Memory Patch function - Patch address 4 low	PFAL4		R/W
0003C5H	Memory Patch function - Patch address 4 middle	PFAM4		R/W
0003C6H	Memory Patch function - Patch address 4 high	PFAH4		R/W
0003C7H	Memory Patch function - Patch address 5 low	PFAL5		R/W
0003C8H	Memory Patch function - Patch address 5 middle	PFAM5		R/W
0003C9H	Memory Patch function - Patch address 5 high	PFAH5		R/W
0003CAH	Memory Patch function - Patch address 6 low	PFAL6		R/W
0003CBH	Memory Patch function - Patch address 6 middle	PFAM6		R/W
0003CCH	Memory Patch function - Patch address 6 high	PFAH6		R/W
0003CDH	Memory Patch function - Patch address 7 low	PFAL7		R/W
0003CEH	Memory Patch function - Patch address 7 middle	PFAM7		R/W
0003CFH	Memory Patch function - Patch address 7 high	PFAH7		R/W
0003D0H	Memory Patch function - Patch data 0 Low	PFDL0	PFD0	R/W
0003D1H	Memory Patch function - Patch data 0 High	PFDH0		R/W
0003D2H	Memory Patch function - Patch data 1 Low	PFDL1	PFD1	R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (13/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
0003D3H	Memory Patch function - Patch data 1 High	PFDH1		R/W
0003D4H	Memory Patch function - Patch data 2 Low	PFDL2	PFD2	R/W
0003D5H	Memory Patch function - Patch data 2 High	PFDH2		R/W
0003D6H	Memory Patch function - Patch data 3 Low	PFDL3	PFD3	R/W
0003D7H	Memory Patch function - Patch data 3 High	PFDH3		R/W
0003D8H	Memory Patch function - Patch data 4 Low	PFDL4	PFD4	R/W
0003D9H	Memory Patch function - Patch data 4 High	PFDH4		R/W
0003DAH	Memory Patch function - Patch data 5 Low	PFDL5	PFD5	R/W
0003DBH	Memory Patch function - Patch data 5 High	PFDH5		R/W
0003DCH	Memory Patch function - Patch data 6 Low	PFDL6	PFD6	R/W
0003DDH	Memory Patch function - Patch data 6 High	PFDH6		R/W
0003DEH	Memory Patch function - Patch data 7 Low	PFDL7	PFD7	R/W
0003DFH	Memory Patch function - Patch data 7 High	PFDH7		R/W
0003E0H	Data Flash Control and Status register A	DFCSA		R/W
0003E1H	Data Flash Write command sequencer Control register A	DFWCA		R/W
0003E2H	Data Flash Write command sequencer Status register A	DFWSA		R/W
0003E3H-0003F0H	Reserved			-
0003F1H	Memory Control Status Register A	MCSRA		R/W
0003F2H	Memory Timing Configuration Register A Low	MTCRAL	MTCRA	R/W
0003F3H	Memory Timing Configuration Register A High	MTCRAH		R/W
0003F4H	Reserved			-
0003F5H	Memory Control Status Register B	MCSRB		R/W
0003F6H	Memory Timing Configuration Register B Low	MTCRBL	MTCRB	R/W
0003F7H	Memory Timing Configuration Register B High	MTCRBH		R/W
0003F8H	Flash Memory Write Control register 0	FMWC0		R/W
0003F9H	Flash Memory Write Control register 1	FMWC1		R/W
0003FAH	Flash Memory Write Control register 2	FMWC2		R/W
0003FBH	Flash Memory Write Control register 3	FMWC3		R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (14/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
0003FC$_H$	Flash Memory Write Control register 4	FMWC4		R/W
0003FD$_H$	Flash Memory Write Control register 5	FMWC5		R/W
0003FE$_H$-0003FF$_H$	Reserved			-
000400$_H$	Standby Mode control register	SMCR		R/W
000401$_H$	Clock select register	CKSR		R/W
000402$_H$	Clock Stabilization select register	CKSSR		R/W
000403$_H$	Clock monitor register	CKMR		R
000404$_H$	Clock Frequency control register Low	CKFCRL	CKFCR	R/W
000405$_H$	Clock Frequency control register High	CKFCRH		R/W
000406$_H$	PLL Control register Low	PLLCRL	PLLCR	R/W
000407$_H$	PLL Control register High	PLLCRH		R/W
000408$_H$	RC clock timer control register	RCTCR		R/W
000409$_H$	Main clock timer control register	MCTCR		R/W
00040A$_H$	Sub clock timer control register	SCTCR		R/W
00040B$_H$	Reset cause and clock status register with clear function	RCCSRC		R
00040C$_H$	Reset configuration register	RCR		R/W
00040D$_H$	Reset cause and clock status register	RCCSR		R
00040E$_H$	Watch dog timer configuration register	WDTC		R/W
00040F$_H$	Watch dog timer clear pattern register	WDTCP		W
000410$_H$-000414$_H$	Reserved			-
000415$_H$	Clock output activation register	COAR		R/W
000416$_H$	Clock output configuration register 0	COCR0		R/W
000417$_H$	Clock output configuration register 1	COCR1		R/W
000418$_H$	Clock Modulator control register	CMCR		R/W
000419$_H$	Reserved			-
00041A$_H$	Clock Modulator Parameter register Low	CMPRL	CMPR	R/W
00041B$_H$	Clock Modulator Parameter register High	CMPRH		R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (15/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
00041C$_H$-00042B$_H$	Reserved			-
00042C$_H$	Voltage Regulator Control register	VRCR		R/W
00042D$_H$	Clock Input and LVD Control Register	CILCR		R/W
00042E$_H$-00042F$_H$	Reserved			-
000430$_H$	I/O Port P00 - Data Direction Register	DDR00		R/W
000431$_H$	I/O Port P01 - Data Direction Register	DDR01		R/W
000432$_H$	I/O Port P02 - Data Direction Register	DDR02		R/W
000433$_H$	I/O Port P03 - Data Direction Register	DDR03		R/W
000434$_H$	I/O Port P04 - Data Direction Register	DDR04		R/W
000435$_H$	I/O Port P05 - Data Direction Register	DDR05		R/W
000436$_H$	I/O Port P06 - Data Direction Register	DDR06		R/W
000437$_H$	I/O Port P07 - Data Direction Register	DDR07		R/W
000438$_H$	I/O Port P08 - Data Direction Register	DDR08		R/W
000439$_H$	I/O Port P09 - Data Direction Register	DDR09		R/W
00043A$_H$	I/O Port P10 - Data Direction Register	DDR10		R/W
00043B$_H$-000443$_H$	Reserved			-
000444$_H$	I/O Port P00 - Port Input Enable Register	PIER00		R/W
000445$_H$	I/O Port P01 - Port Input Enable Register	PIER01		R/W
000446$_H$	I/O Port P02 - Port Input Enable Register	PIER02		R/W
000447$_H$	I/O Port P03 - Port Input Enable Register	PIER03		R/W
000448$_H$	I/O Port P04 - Port Input Enable Register	PIER04		R/W
000449$_H$	I/O Port P05 - Port Input Enable Register	PIER05		R/W
00044A$_H$	I/O Port P06 - Port Input Enable Register	PIER06		R/W
00044B$_H$	I/O Port P07 - Port Input Enable Register	PIER07		R/W
00044C$_H$	I/O Port P08 - Port Input Enable Register	PIER08		R/W
00044D$_H$	I/O Port P09 - Port Input Enable Register	PIER09		R/W
00044E$_H$	I/O Port P10 - Port Input Enable Register	PIER10		R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (16/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
00044F$_H$-000457$_H$	Reserved			-
000458$_H$	I/O Port P00 - Port Input Level Register	PILR00		R/W
000459$_H$	I/O Port P01 - Port Input Level Register	PILR01		R/W
00045A$_H$	I/O Port P02 - Port Input Level Register	PILR02		R/W
00045B$_H$	I/O Port P03 - Port Input Level Register	PILR03		R/W
00045C$_H$	I/O Port P04 - Port Input Level Register	PILR04		R/W
00045D$_H$	I/O Port P05 - Port Input Level Register	PILR05		R/W
00045E$_H$	I/O Port P06 - Port Input Level Register	PILR06		R/W
00045F$_H$	I/O Port P07 - Port Input Level Register	PILR07		R/W
000460$_H$	I/O Port P08 - Port Input Level Register	PILR08		R/W
000461$_H$	I/O Port P09 - Port Input Level Register	PILR09		R/W
000462$_H$	I/O Port P10 - Port Input Level Register	PILR10		R/W
000463$_H$-00046B$_H$	Reserved			-
00046C$_H$	I/O Port P00 - Extended Port Input Level Register	EPILR00		R/W
00046D$_H$	I/O Port P01 - Extended Port Input Level Register	EPILR01		R/W
00046E$_H$	I/O Port P02 - Extended Port Input Level Register	EPILR02		R/W
00046F$_H$	I/O Port P03 - Extended Port Input Level Register	EPILR03		R/W
000470$_H$	I/O Port P04 - Extended Port Input Level Register	EPILR04		R/W
000471$_H$	I/O Port P05 - Extended Port Input Level Register	EPILR05		R/W
000472$_H$	I/O Port P06 - Extended Port Input Level Register	EPILR06		R/W
000473$_H$	I/O Port P07 - Extended Port Input Level Register	EPILR07		R/W
000474$_H$	I/O Port P08 - Extended Port Input Level Register	EPILR08		R/W
000475$_H$	I/O Port P09 - Extended Port Input Level Register	EPILR09		R/W
000476$_H$	I/O Port P10 - Extended Port Input Level Register	EPILR10		R/W
000477$_H$-00047F$_H$	Reserved			-
000480$_H$	I/O Port P00 - Port Output Drive Register	PODR00		R/W
000481$_H$	I/O Port P01 - Port Output Drive Register	PODR01		R/W
000482$_H$	I/O Port P02 - Port Output Drive Register	PODR02		R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (17/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000483H	I/O Port P03 - Port Output Drive Register	PODR03		R/W
000484H	I/O Port P04 - Port Output Drive Register	PODR04		R/W
000485H	I/O Port P05 - Port Output Drive Register	PODR05		R/W
000486H	I/O Port P06 - Port Output Drive Register	PODR06		R/W
000487H	I/O Port P07 - Port Output Drive Register	PODR07		R/W
000488H	I/O Port P08 - Port Output Drive Register	PODR08		R/W
000489H	I/O Port P09 - Port Output Drive Register	PODR09		R/W
00048AH	I/O Port P10 - Port Output Drive Register	PODR10		R/W
00048BH-00049BH	Reserved			-
00049CH	I/O Port P08 - Port High Drive Register	PHDR08		R/W
00049DH	I/O Port P09 - Port High Drive Register	PHDR09		R/W
00049EH	I/O Port P10 - Port High Drive Register	PHDR10		R/W
00049FH-0004A7H	Reserved			-
0004A8H	I/O Port P00 - Pull-Up resistor Control Register	PUCR00		R/W
0004A9H	I/O Port P01 - Pull-Up resistor Control Register	PUCR01		R/W
0004AAH	I/O Port P02 - Pull-Up resistor Control Register	PUCR02		R/W
0004ABH	I/O Port P03 - Pull-Up resistor Control Register	PUCR03		R/W
0004ACH	I/O Port P04 - Pull-Up resistor Control Register	PUCR04		R/W
0004ADH	I/O Port P05 - Pull-Up resistor Control Register	PUCR05		R/W
0004AEH	I/O Port P06 - Pull-Up resistor Control Register	PUCR06		R/W
0004AFH	I/O Port P07 - Pull-Up resistor Control Register	PUCR07		R/W
0004B0H	I/O Port P08 - Pull-Up resistor Control Register	PUCR08		R/W
0004B1H	I/O Port P09 - Pull-Up resistor Control Register	PUCR09		R/W
0004B2H	I/O Port P10 - Pull-Up resistor Control Register	PUCR10		R/W
0004B3H-0004BBH	Reserved			-
0004BCH	I/O Port P00 - External Pin State Register	EPSR00		R
0004BDH	I/O Port P01 - External Pin State Register	EPSR01		R
0004BEH	I/O Port P02 - External Pin State Register	EPSR02		R

Downloaded from Arrow.com.

I/O map MB96(F)34x (18/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
0004BF$_H$	I/O Port P03 - External Pin State Register	EPSR03		R
0004C0$_H$	I/O Port P04 - External Pin State Register	EPSR04		R
0004C1$_H$	I/O Port P05 - External Pin State Register	EPSR05		R
0004C2$_H$	I/O Port P06 - External Pin State Register	EPSR06		R
0004C3$_H$	I/O Port P07 - External Pin State Register	EPSR07		R
0004C4$_H$	I/O Port P08 - External Pin State Register	EPSR08		R
0004C5$_H$	I/O Port P09 - External Pin State Register	EPSR09		R
0004C6$_H$	I/O Port P10 - External Pin State Register	EPSR10		R
0004C7$_H$-0004CF$_H$	Reserved			-
0004D0$_H$	ADC analog input enable register 0	ADER0		R/W
0004D1$_H$	ADC analog input enable register 1	ADER1		R/W
0004D2$_H$	ADC analog input enable register 2	ADER2		R/W
0004D3$_H$	ADC analog input enable register 3	ADER3		R/W
0004D4$_H$	ADC analog input enable register 4	ADER4		R/W
0004D5$_H$	Reserved			-
0004D6$_H$	Peripheral Resource Relocation Register 0	PRRR0		R/W
0004D7$_H$	Peripheral Resource Relocation Register 1	PRRR1		R/W
0004D8$_H$	Peripheral Resource Relocation Register 2	PRRR2		R/W
0004D9$_H$	Peripheral Resource Relocation Register 3	PRRR3		R/W
0004DA$_H$	Peripheral Resource Relocation Register 4	PRRR4		R/W
0004DB$_H$	Peripheral Resource Relocation Register 5	PRRR5		R/W
0004DC$_H$	Peripheral Resource Relocation Register 6	PRRR6		R/W
0004DD$_H$	Peripheral Resource Relocation Register 7	PRRR7		R/W
0004DE$_H$	Peripheral Resource Relocation Register 8	PRRR8		R/W
0004DF$_H$	Peripheral Resource Relocation Register 9	PRRR9		R/W
0004E0$_H$	RTC - Sub Second Register L	WTBRL0	WTBR0	R/W
0004E1$_H$	RTC - Sub Second Register M	WTBRH0		R/W
0004E2$_H$	RTC - Sub-Second Register H	WTBR1		R/W
0004E3$_H$	RTC - Second Register	WTSR		R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (19/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
0004E4H	RTC - Minutes	WTMR		R/W
0004E5H	RTC - Hour	WTHR		R/W
0004E6H	RTC - Timer Control Extended Register	WTCER		R/W
0004E7H	RTC - Clock select register	WTCKSR		R/W
0004E8H	RTC - Timer Control Register Low	WTCRL	WTCR	R/W
0004E9H	RTC - Timer Control Register High	WTCRH		R/W
0004EAH	CAL - Calibration unit Control register	CUCR		R/W
0004EBH	Reserved			-
0004ECH	CAL - Duration Timer Data Register Low	CUTDL	CUTD	R/W
0004EDH	CAL - Duration Timer Data Register High	CUTDH		R/W
0004EEH	CAL - Calibration Timer Register 2 Low	CUTR2L	CUTR2	R
0004EFH	CAL - Calibration Timer Register 2 High	CUTR2H		R
0004F0H	CAL - Calibration Timer Register 1 Low	CUTR1L	CUTR1	R
0004F1H	CAL - Calibration Timer Register 1 High	CUTR1H		R
0004F2H-0004F9H	Reserved			-
0004FAH	RLT - Timer input select (for Cascading)	TMISR		R/W
0004FBH-00053DH	Reserved			-
00053EH	USART7 - Serial Mode Register	SMR7		R/W
00053FH	USART7 - Serial Control Register	SCR7		R/W
000540H	USART7 - Serial TX Register	TDR7		W
000540H	USART7 - Serial RX Register	RDR7		R
000541H	USART7 - Serial Status Register	SSR7		R/W
000542H	USART7 - Ext. Control/Com. Register	ECCR7		R/W
000543H	USART7 - Ext. Status Com. Register	ESCR7		R/W
000544H	USART7 - Baud Rate Generator Register Low	BGRL7	BGR7	R/W
000545H	USART7 - Baud Rate Generator Register High	BGRH7		R/W
000546H	USART7 - Extended Serial Interrupt Register	ESIR7		R/W
000547H	Reserved			-
000548H	USART8 - Serial Mode Register	SMR8		R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (20/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000549H	USART8 - Serial Control Register	SCR8		R/W
00054AH	USART8 - Serial TX Register	TDR8		W
00054AH	USART8 - Serial RX Register	RDR8		R
00054BH	USART8 - Serial Status Register	SSR8		R/W
00054CH	USART8 - Ext. Control/Com. Register	ECCR8		R/W
00054DH	USART8 - Ext. Status Com. Register	ESCR8		R/W
00054EH	USART8 - Baud Rate Generator Register Low	BGRL8	BGR8	R/W
00054FH	USART8 - Baud Rate Generator Register High	BGRH8		R/W
000550H	USART8 - Extended Serial Interrupt Register	ESIR8		R/W
000551H	Reserved			-
000552H	USART9 - Serial Mode Register	SMR9		R/W
000553H	USART9 - Serial Control Register	SCR9		R/W
000554H	USART9 - Serial TX Register	TDR9		W
000554H	USART9 - Serial RX Register	RDR9		R
000555H	USART9 - Serial Status Register	SSR9		R/W
000556H	USART9 - Ext. Control/Com. Register	ECCR9		R/W
000557H	USART9 - Ext. Status Com. Register	ESCR9		R/W
000558H	USART9 - Baud Rate Generator Register Low	BGRL9	BGR9	R/W
000559H	USART9 - Baud Rate Generator Register High	BGRH9		R/W
00055AH	USART9 - Extended Serial Interrupt Register	ESIR9		R/W
00055BH-00055FH	Reserved			-
000560H	ALARM0 - Control Status Register	ACSR0		R/W
000561H	ALARM0 - Extended Control Status Register	AECSR0		R/W
000562H	ALARM1 - Control Status Register	ACSR1		R/W
000563H	ALARM1 - Extended Control Status Register	AECSR1		R/W
000564H	PPG6 - Timer register		PTMR6	R
000565H	PPG6 - Timer register			R
000566H	PPG6 - Period setting register		PCSR6	W
000567H	PPG6 - Period setting register			W

Downloaded from Arrow.com.

I/O map MB96(F)34x (21/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000568H	PPG6 - Duty cycle register		PDUT6	W
000569H	PPG6 - Duty cycle register			W
00056AH	PPG6 - Control status register Low	PCNL6	PCN6	R/W
00056BH	PPG6 - Control status register High	PCNH6		R/W
00056CH	PPG7 - Timer register		PTMR7	R
00056DH	PPG7 - Timer register			R
00056EH	PPG7 - Period setting register		PCSR7	W
00056FH	PPG7 - Period setting register			W
000570H	PPG7 - Duty cycle register		PDUT7	W
000571H	PPG7 - Duty cycle register			W
000572H	PPG7 - Control status register Low	PCNL7	PCN7	R/W
000573H	PPG7 - Control status register High	PCNH7		R/W
000574H	PPG11-PPG8 - General Control register 1 Low	GCN1L2	GCN12	R/W
000575H	PPG11-PPG8 - General Control register 1 High	GCN1H2		R/W
000576H	PPG11-PPG8 - General Control register 2 Low	GCN2L2	GCN22	R/W
000577H	PPG11-PPG8 - General Control register 2 High	GCN2H2		R/W
000578H	PPG8 - Timer register		PTMR8	R
000579H	PPG8 - Timer register			R
00057AH	PPG8 - Period setting register		PCSR8	W
00057BH	PPG8 - Period setting register			W
00057CH	PPG8 - Duty cycle register		PDUT8	W
00057DH	PPG8 - Duty cycle register			W
00057EH	PPG8 - Control status register Low	PCNL8	PCN8	R/W
00057FH	PPG8 - Control status register High	PCNH8		R/W
000580H	PPG9 - Timer register		PTMR9	R
000581H	PPG9 - Timer register			R
000582H	PPG9 - Period setting register		PCSR9	W
000583H	PPG9 - Period setting register			W
000584H	PPG9 - Duty cycle register		PDUT9	W
000585H	PPG9 - Duty cycle register			W

Downloaded from Arrow.com.

I/O map MB96(F)34x (22/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000586H	PPG9 - Control status register Low	PCNL9	PCN9	R/W
000587H	PPG9 - Control status register High	PCNH9		R/W
000588H	PPG10 - Timer register		PTMR10	R
000589H	PPG10 - Timer register			R
00058AH	PPG10 - Period setting register		PCSR10	W
00058BH	PPG10 - Period setting register			W
00058CH	PPG10 - Duty cycle register		PDUT10	W
00058DH	PPG10 - Duty cycle register			W
00058EH	PPG10 - Control status register Low	PCNL10	PCN10	R/W
00058FH	PPG10 - Control status register High	PCNH10		R/W
000590H	PPG11 - Timer register		PTMR11	R
000591H	PPG11 - Timer register			R
000592H	PPG11 - Period setting register		PCSR11	W
000593H	PPG11 - Period setting register			W
000594H	PPG11 - Duty cycle register		PDUT11	W
000595H	PPG11 - Duty cycle register			W
000596H	PPG11 - Control status register Low	PCNL11	PCN11	R/W
000597H	PPG11 - Control status register High	PCNH11		R/W
000598H	PPG15-PPG12 - General Control register 1 Low	GCN1L3	GCN13	R/W
000599H	PPG15-PPG12 - General Control register 1 High	GCN1H3		R/W
00059AH	PPG15-PPG12 - General Control register 2 Low	GCN2L3	GCN23	R/W
00059BH	PPG15-PPG12 - General Control register 2 High	GCN2H3		R/W
00059CH	PPG12 - Timer register		PTMR12	R
00059DH	PPG12 - Timer register			R
00059EH	PPG12 - Period setting register		PCSR12	W
00059FH	PPG12 - Period setting register			W
0005A0H	PPG12 - Duty cycle register		PDUT12	W
0005A1H	PPG12 - Duty cycle register			W
0005A2H	PPG12 - Control status register Low	PCNL12	PCN12	R/W
0005A3H	PPG12 - Control status register High	PCNH12		R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (23/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
0005A4H	PPG13 - Timer register		PTMR13	R
0005A5H	PPG13 - Timer register			R
0005A6H	PPG13 - Period setting register		PCSR13	W
0005A7H	PPG13 - Period setting register			W
0005A8H	PPG13 - Duty cycle register		PDUT13	W
0005A9H	PPG13 - Duty cycle register			W
0005AAH	PPG13 - Control status register Low	PCNL13	PCN13	R/W
0005ABH	PPG13 - Control status register High	PCNH13		R/W
0005ACH	PPG14 - Timer register		PTMR14	R
0005ADH	PPG14 - Timer register			R
0005AEH	PPG14 - Period setting register		PCSR14	W
0005AFH	PPG14 - Period setting register			W
0005B0H	PPG14 - Duty cycle register		PDUT14	W
0005B1H	PPG14 - Duty cycle register			W
0005B2H	PPG14 - Control status register Low	PCNL14	PCN14	R/W
0005B3H	PPG14 - Control status register High	PCNH14		R/W
0005B4H	PPG15 - Timer register		PTMR15	R
0005B5H	PPG15 - Timer register			R
0005B6H	PPG15 - Period setting register		PCSR15	W
0005B7H	PPG15 - Period setting register			W
0005B8H	PPG15 - Duty cycle register		PDUT15	W
0005B9H	PPG15 - Duty cycle register			W
0005BAH	PPG15 - Control status register Low	PCNL15	PCN15	R/W
0005BBH	PPG15 - Control status register High	PCNH15		R/W
0005BCH-00065FH	Reserved			-
000660H	Peripheral Resource Relocation Register 10	PRRR10		R/W
000661H	Peripheral Resource Relocation Register 11	PRRR11		R/W
000662H	Peripheral Resource Relocation Register 12	PRRR12		R/W
000663H	Peripheral Resource Relocation Register 13	PRRR13		W

Downloaded from Arrow.com.

I/O map MB96(F)34x (24/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000664H-0006DFH	Reserved			-
0006E0H	External Bus - Area configuration register 0 Low	EACL0	EAC0	R/W
0006E1H	External Bus - Area configuration register 0 High	EACH0		R/W
0006E2H	External Bus - Area configuration register 1 Low	EACL1	EAC1	R/W
0006E3H	External Bus - Area configuration register 1 High	EACH1		R/W
0006E4H	External Bus - Area configuration register 2 Low	EACL2	EAC2	R/W
0006E5H	External Bus - Area configuration register 2 High	EACH2		R/W
0006E6H	External Bus - Area configuration register 3 Low	EACL3	EAC3	R/W
0006E7H	External Bus - Area configuration register 3 High	EACH3		R/W
0006E8H	External Bus - Area configuration register 4 Low	EACL4	EAC4	R/W
0006E9H	External Bus - Area configuration register 4 High	EACH4		R/W
0006EAH	External Bus - Area configuration register 5 Low	EACL5	EAC5	R/W
0006EBH	External Bus - Area configuration register 5 High	EACH5		R/W
0006ECH	External Bus - Area select register 2	EAS2		R/W
0006EDH	External Bus - Area select register 3	EAS3		R/W
0006EEH	External Bus - Area select register 4	EAS4		R/W
0006EFH	External Bus - Area select register 5	EAS5		R/W
0006F0H	External Bus - Mode register	EBM		R/W
0006F1H	External Bus - Clock and Function register	EBCF		R/W
0006F2H	External Bus - Address output enable register 0	EBAE0		R/W
0006F3H	External Bus - Address output enable register 1	EBAE1		R/W
0006F4H	External Bus - Address output enable register 2	EBAE2		R/W
0006F5H	External Bus - Control signal register	EBCS		R/W
0006F6H-0006FFH	Reserved			-
000700H	CAN0 - Control register Low	CTRLRL0	CTRLR0	R/W
000701H	CAN0 - Control register High (reserved)	CTRLRH0		R
000702H	CAN0 - Status register Low	STATRL0	STATR0	R/W
000703H	CAN0 - Status register High (reserved)	STATRH0		R
000704H	CAN0 - Error Counter Low (Transmit)	ERRCNTL0	ERRCNT0	R

Downloaded from Arrow.com.

I/O map MB96(F)34x (25/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000705H	CAN0 - Error Counter High (Receive)	ERRCNTH0		R
000706H	CAN0 - Bit Timing Register Low	BTRL0	BTR0	R/W
000707H	CAN0 - Bit Timing Register High	BTRH0		R/W
000708H	CAN0 - Interrupt Register Low	INTRL0	INTR0	R
000709H	CAN0 - Interrupt Register High	INTRH0		R
00070AH	CAN0 - Test Register Low	TESTRL0	TESTR0	R/W
00070BH	CAN0 - Test Register High (reserved)	TESTRH0		R
00070CH	CAN0 - BRP Extension register Low	BRPERL0	BRPER0	R/W
00070DH	CAN0 - BRP Extension register High (reserved)	BRPERH0		R
00070EH-00070FH	Reserved			-
000710H	CAN0 - IF1 Command request register Low	IF1CREQL0	IF1CREQ0	R/W
000711H	CAN0 - IF1 Command request register High	IF1CREQH0		R/W
000712H	CAN0 - IF1 Command Mask register Low	IF1CMSKL0	IF1CMSK0	R/W
000713H	CAN0 - IF1 Command Mask register High (reserved)	IF1CMSKH0		R
000714H	CAN0 - IF1 Mask 1 Register Low	IF1MSK1L0	IF1MSK10	R/W
000715H	CAN0 - IF1 Mask 1 Register High	IF1MSK1H0		R/W
000716H	CAN0 - IF1 Mask 2 Register Low	IF1MSK2L0	IF1MSK20	R/W
000717H	CAN0 - IF1 Mask 2 Register High	IF1MSK2H0		R/W
000718H	CAN0 - IF1 Arbitration 1 Register Low	IF1ARB1L0	IF1ARB10	R/W
000719H	CAN0 - IF1 Arbitration 1 Register High	IF1ARB1H0		R/W
00071AH	CAN0 - IF1 Arbitration 2 Register Low	IF1ARB2L0	IF1ARB20	R/W
00071BH	CAN0 - IF1 Arbitration 2 Register High	IF1ARB2H0		R/W
00071CH	CAN0 - IF1 Message Control Register Low	IF1MCTRL0	IF1MCTR0	R/W
00071DH	CAN0 - IF1 Message Control Register High	IF1MCTRH0		R/W
00071EH	CAN0 - IF1 Data A1 Low	IF1DTA1L0	IF1DTA10	R/W
00071FH	CAN0 - IF1 Data A1 High	IF1DTA1H0		R/W
000720H	CAN0 - IF1 Data A2 Low	IF1DTA2L0	IF1DTA20	R/W
000721H	CAN0 - IF1 Data A2 High	IF1DTA2H0		R/W
000722H	CAN0 - IF1 Data B1 Low	IF1DTB1L0	IF1DTB10	R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (26/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000723H	CAN0 - IF1 Data B1 High	IF1DTB1H0		R/W
000724H	CAN0 - IF1 Data B2 Low	IF1DTB2L0	IF1DTB20	R/W
000725H	CAN0 - IF1 Data B2 High	IF1DTB2H0		R/W
000726H-00073FH	Reserved			-
000740H	CAN0 - IF2 Command request register Low	IF2CREQL0	IF2CREQ0	R/W
000741H	CAN0 - IF2 Command request register High	IF2CREQH0		R/W
000742H	CAN0 - IF2 Command Mask register Low	IF2CMSKL0	IF2CMSK0	R/W
000743H	CAN0 - IF2 Command Mask register High (reserved)	IF2CMSKH0		R
000744H	CAN0 - IF2 Mask 1 Register Low	IF2MSK1L0	IF2MSK10	R/W
000745H	CAN0 - IF2 Mask 1 Register High	IF2MSK1H0		R/W
000746H	CAN0 - IF2 Mask 2 Register Low	IF2MSK2L0	IF2MSK20	R/W
000747H	CAN0 - IF2 Mask 2 Register High	IF2MSK2H0		R/W
000748H	CAN0 - IF2 Arbitration 1 Register Low	IF2ARB1L0	IF2ARB10	R/W
000749H	CAN0 - IF2 Arbitration 1 Register High	IF2ARB1H0		R/W
00074AH	CAN0 - IF2 Arbitration 2 Register Low	IF2ARB2L0	IF2ARB20	R/W
00074BH	CAN0 - IF2 Arbitration 2 Register High	IF2ARB2H0		R/W
00074CH	CAN0 - IF2 Message Control Register Low	IF2MCTRL0	IF2MCTR0	R/W
00074DH	CAN0 - IF2 Message Control Register High	IF2MCTRH0		R/W
00074EH	CAN0 - IF2 Data A1 Low	IF2DTA1L0	IF2DTA10	R/W
00074FH	CAN0 - IF2 Data A1 High	IF2DTA1H0		R/W
000750H	CAN0 - IF2 Data A2 Low	IF2DTA2L0	IF2DTA20	R/W
000751H	CAN0 - IF2 Data A2 High	IF2DTA2H0		R/W
000752H	CAN0 - IF2 Data B1 Low	IF2DTB1L0	IF2DTB10	R/W
000753H	CAN0 - IF2 Data B1 High	IF2DTB1H0		R/W
000754H	CAN0 - IF2 Data B2 Low	IF2DTB2L0	IF2DTB20	R/W
000755H	CAN0 - IF2 Data B2 High	IF2DTB2H0		R/W
000756H-00077FH	Reserved			-
000780H	CAN0 - Transmission Request 1 Register Low	TREQR1L0	TREQR10	R

Downloaded from Arrow.com.

I/O map MB96(F)34x (27/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000781H	CAN0 - Transmission Request 1 Register High	TREQR1H0		R
000782H	CAN0 - Transmission Request 2 Register Low	TREQR2L0	TREQR20	R
000783H	CAN0 - Transmission Request 2 Register High	TREQR2H0		R
000784H-00078FH	Reserved			-
000790H	CAN0 - New Data 1 Register Low	NEWDT1L0	NEWDT10	R
000791H	CAN0 - New Data 1 Register High	NEWDT1H0		R
000792H	CAN0 - New Data 2 Register Low	NEWDT2L0	NEWDT20	R
000793H	CAN0 - New Data 2 Register High	NEWDT2H0		R
000794H-00079FH	Reserved			-
0007A0H	CAN0 - Interrupt Pending 1 Register Low	INTPND1L0	INTPND10	R
0007A1H	CAN0 - Interrupt Pending 1 Register High	INTPND1H0		R
0007A2H	CAN0 - Interrupt Pending 2 Register Low	INTPND2L0	INTPND20	R
0007A3H	CAN0 - Interrupt Pending 2 Register High	INTPND2H0		R
0007A4H-0007AFH	Reserved			-
0007B0H	CAN0 - Message Valid 1 Register Low	MSGVAL1L0	MSGVAL10	R
0007B1H	CAN0 - Message Valid 1 Register High	MSGVAL1H0		R
0007B2H	CAN0 - Message Valid 2 Register Low	MSGVAL2L0	MSGVAL20	R
0007B3H	CAN0 - Message Valid 2 Register High	MSGVAL2H0		R
0007B4H-0007CDH	Reserved			-
0007CEH	CAN0 - Output enable register	COER0		R/W
0007CFH-0007FFH	Reserved			-
000800H	CAN1 - Control register Low	CTRLRL1	CTRLR1	R/W
000801H	CAN1 - Control register High (reserved)	CTRLRH1		R
000802H	CAN1 - Status register Low	STATRL1	STATR1	R/W
000803H	CAN1 - Status register High (reserved)	STATRH1		R
000804H	CAN1 - Error Counter Low (Transmit)	ERRCNTL1	ERRCNT1	R
000805H	CAN1 - Error Counter High (Receive)	ERRCNTH1		R

Downloaded from Arrow.com.

I/O map MB96(F)34x (28/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000806H	CAN1 - Bit Timing Register Low	BTRL1	BTR1	R/W
000807H	CAN1 - Bit Timing Register High	BTRH1		R/W
000808H	CAN1 - Interrupt Register Low	INTRL1	INTR1	R
000809H	CAN1 - Interrupt Register High	INTRH1		R
00080AH	CAN1 - Test Register Low	TESTRL1	TESTR1	R/W
00080BH	CAN1 - Test Register High (reserved)	TESTRH1		R
00080CH	CAN1 - BRP Extension register Low	BRPERL1	BRPER1	R/W
00080DH	CAN1 - BRP Extension register High (reserved)	BRPERH1		R
00080EH-00080FH	Reserved			-
000810H	CAN1 - IF1 Command request register Low	IF1CREQL1	IF1CREQ1	R/W
000811H	CAN1 - IF1 Command request register High	IF1CREQH1		R/W
000812H	CAN1 - IF1 Command Mask register Low	IF1CMSKL1	IF1CMSK1	R/W
000813H	CAN1 - IF1 Command Mask register High (reserved)	IF1CMSKH1		R
000814H	CAN1 - IF1 Mask 1 Register Low	IF1MSK1L1	IF1MSK11	R/W
000815H	CAN1 - IF1 Mask 1 Register High	IF1MSK1H1		R/W
000816H	CAN1 - IF1 Mask 2 Register Low	IF1MSK2L1	IF1MSK21	R/W
000817H	CAN1 - IF1 Mask 2 Register High	IF1MSK2H1		R/W
000818H	CAN1 - IF1 Arbitration 1 Register Low	IF1ARB1L1	IF1ARB11	R/W
000819H	CAN1 - IF1 Arbitration 1 Register High	IF1ARB1H1		R/W
00081AH	CAN1 - IF1 Arbitration 2 Register Low	IF1ARB2L1	IF1ARB21	R/W
00081BH	CAN1 - IF1 Arbitration 2 Register High	IF1ARB2H1		R/W
00081CH	CAN1 - IF1 Message Control Register Low	IF1MCTRL1	IF1MCTR1	R/W
00081DH	CAN1 - IF1 Message Control Register High	IF1MCTRH1		R/W
00081EH	CAN1 - IF1 Data A1 Low	IF1DTA1L1	IF1DTA11	R/W
00081FH	CAN1 - IF1 Data A1 High	IF1DTA1H1		R/W
000820H	CAN1 - IF1 Data A2 Low	IF1DTA2L1	IF1DTA21	R/W
000821H	CAN1 - IF1 Data A2 High	IF1DTA2H1		R/W
000822H	CAN1 - IF1 Data B1 Low	IF1DTB1L1	IF1DTB11	R/W
000823H	CAN1 - IF1 Data B1 High	IF1DTB1H1		R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (29/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000824H	CAN1 - IF1 Data B2 Low	IF1DTB2L1	IF1DTB21	R/W
000825H	CAN1 - IF1 Data B2 High	IF1DTB2H1		R/W
000826H-00083FH	Reserved			-
000840H	CAN1 - IF2 Command request register Low	IF2CREQL1	IF2CREQ1	R/W
000841H	CAN1 - IF2 Command request register High	IF2CREQH1		R/W
000842H	CAN1 - IF2 Command Mask register Low	IF2CMSKL1	IF2CMSK1	R/W
000843H	CAN1 - IF2 Command Mask register High (reserved)	IF2CMSKH1		R
000844H	CAN1 - IF2 Mask 1 Register Low	IF2MSK1L1	IF2MSK11	R/W
000845H	CAN1 - IF2 Mask 1 Register High	IF2MSK1H1		R/W
000846H	CAN1 - IF2 Mask 2 Register Low	IF2MSK2L1	IF2MSK21	R/W
000847H	CAN1 - IF2 Mask 2 Register High	IF2MSK2H1		R/W
000848H	CAN1 - IF2 Arbitration 1 Register Low	IF2ARB1L1	IF2ARB11	R/W
000849H	CAN1 - IF2 Arbitration 1 Register High	IF2ARB1H1		R/W
00084AH	CAN1 - IF2 Arbitration 2 Register Low	IF2ARB2L1	IF2ARB21	R/W
00084BH	CAN1 - IF2 Arbitration 2 Register High	IF2ARB2H1		R/W
00084CH	CAN1 - IF2 Message Control Register Low	IF2MCTRL1	IF2MCTR1	R/W
00084DH	CAN1 - IF2 Message Control Register High	IF2MCTRH1		R/W
00084EH	CAN1 - IF2 Data A1 Low	IF2DTA1L1	IF2DTA11	R/W
00084FH	CAN1 - IF2 Data A1 High	IF2DTA1H1		R/W
000850H	CAN1 - IF2 Data A2 Low	IF2DTA2L1	IF2DTA21	R/W
000851H	CAN1 - IF2 Data A2 High	IF2DTA2H1		R/W
000852H	CAN1 - IF2 Data B1 Low	IF2DTB1L1	IF2DTB11	R/W
000853H	CAN1 - IF2 Data B1 High	IF2DTB1H1		R/W
000854H	CAN1 - IF2 Data B2 Low	IF2DTB2L1	IF2DTB21	R/W
000855H	CAN1 - IF2 Data B2 High	IF2DTB2H1		R/W
000856H-00087FH	Reserved			-
000880H	CAN1 - Transmission Request 1 Register Low	TREQR1L1	TREQR11	R
000881H	CAN1 - Transmission Request 1 Register High	TREQR1H1		R

Downloaded from Arrow.com.

I/O map MB96(F)34x (30/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000882H	CAN1 - Transmission Request 2 Register Low	TREQR2L1	TREQR21	R
000883H	CAN1 - Transmission Request 2 Register High	TREQR2H1		R
000884H-00088FH	Reserved			-
000890H	CAN1 - New Data 1 Register Low	NEWDT1L1	NEWDT11	R
000891H	CAN1 - New Data 1 Register High	NEWDT1H1		R
000892H	CAN1 - New Data 2 Register Low	NEWDT2L1	NEWDT21	R
000893H	CAN1 - New Data 2 Register High	NEWDT2H1		R
000894H-00089FH	Reserved			-
0008A0H	CAN1 - Interrupt Pending 1 Register Low	INTPND1L1	INTPND11	R
0008A1H	CAN1 - Interrupt Pending 1 Register High	INTPND1H1		R
0008A2H	CAN1 - Interrupt Pending 2 Register Low	INTPND2L1	INTPND21	R
0008A3H	CAN1 - Interrupt Pending 2 Register High	INTPND2H1		R
0008A4H-0008AFH	Reserved			-
0008B0H	CAN1 - Message Valid 1 Register Low	MSGVAL1L1	MSGVAL11	R
0008B1H	CAN1 - Message Valid 1 Register High	MSGVAL1H1		R
0008B2H	CAN1 - Message Valid 2 Register Low	MSGVAL2L1	MSGVAL21	R
0008B3H	CAN1 - Message Valid 2 Register High	MSGVAL2H1		R
0008B4H-0008CDH	Reserved			-
0008CEH	CAN1 - Output enable register	COER1		R/W
0008CFH-0009FFH	Reserved			-
000A00H	DMA - IO address block register 0	IOABK0		R/W
000A01H	DMA - IO address block register 1	IOABK1		R/W
000A02H	DMA - IO address block register 2	IOABK2		R/W
000A03H	DMA - IO address block register 3	IOABK3		R/W
000A04H	DMA - IO address block register 4	IOABK4		R/W
000A05H	DMA - IO address block register 5	IOABK5		R/W

Downloaded from Arrow.com.

I/O map MB96(F)34x (31/31)

Address	Register	Abbreviation 8-bit access	Abbreviation 16-bit access	Access
000A06$_H$-000BFF$_H$	Reserved			-

Note: Any write access to reserved addresses in the I/O map should not be performed. A read access to a reserved address results in reading ‘X’.
Registers of resources which are described in this table, but which are not supported by the device, should also be handled as “Reserved”.

Downloaded from Arrow.com.

■ INTERRUPT VECTOR TABLE

Interrupt vector table MB96(F)34x (1/4)

Vector number	Offset in vector table	Vector name	Cleared by DMA	Index in ICR to program	Description
0	3FC$_H$	CALLV0	No	-	
1	3F8$_H$	CALLV1	No	-	
2	3F4$_H$	CALLV2	No	-	
3	3F0$_H$	CALLV3	No	-	
4	3EC$_H$	CALLV4	No	-	
5	3E8$_H$	CALLV5	No	-	
6	3E4$_H$	CALLV6	No	-	
7	3E0$_H$	CALLV7	No	-	
8	3DC$_H$	RESET	No	-	
9	3D8$_H$	INT9	No	-	
10	3D4$_H$	EXCEPTION	No	-	
11	3D0$_H$	NMI	No	-	Non-Maskable Interrupt
12	3CC$_H$	DLY	No	12	Delayed Interrupt
13	3C8$_H$	RC_TIMER	No	13	RC Timer
14	3C4$_H$	MC_TIMER	No	14	Main Clock Timer
15	3C0$_H$	SC_TIMER	No	15	Sub Clock Timer
16	3BC$_H$	RESERVED	No	16	Reserved
17	3B8$_H$	EXTINT0	Yes	17	External Interrupt 0
18	3B4$_H$	EXTINT1	Yes	18	External Interrupt 1
19	3B0$_H$	EXTINT2	Yes	19	External Interrupt 2
20	3AC$_H$	EXTINT3	Yes	20	External Interrupt 3
21	3A8$_H$	EXTINT4	Yes	21	External Interrupt 4
22	3A4$_H$	EXTINT5	Yes	22	External Interrupt 5
23	3A0$_H$	EXTINT6	Yes	23	External Interrupt 6
24	39C$_H$	EXTINT7	Yes	24	External Interrupt 7
25	398$_H$	EXTINT8	Yes	25	External Interrupt 8
26	394$_H$	EXTINT9	Yes	26	External Interrupt 9
27	390$_H$	EXTINT10	Yes	27	External Interrupt 10

Downloaded from Arrow.com.

Interrupt vector table MB96(F)34x (2/4)

Vector number	Offset in vector table	Vector name	Cleared by DMA	Index in ICR to program	Description
28	38CH	EXTINT11	Yes	28	External Interrupt 11
29	388H	EXTINT12	Yes	29	External Interrupt 12
30	384H	EXTINT13	Yes	30	External Interrupt 13
31	380H	EXTINT14	Yes	31	External Interrupt 14
32	37CH	EXTINT15	Yes	32	External Interrupt 15
33	378H	CAN0	No	33	CAN Controller 0 (except MB96(F)34xAyy or MB96(F)34xCyy)
34	374H	CAN1	No	34	CAN Controller 1 (except MB96(F)34xAyy, MB96(F)34xCyy, MB96F345Dyy or MB96F345Fyy)
35	370H	PPG0	Yes	35	Programmable Pulse Generator 0
36	36CH	PPG1	Yes	36	Programmable Pulse Generator 1
37	368H	PPG2	Yes	37	Programmable Pulse Generator 2
38	364H	PPG3	Yes	38	Programmable Pulse Generator 3
39	360H	PPG4	Yes	39	Programmable Pulse Generator 4
40	35CH	PPG5	Yes	40	Programmable Pulse Generator 5
41	358H	PPG6	Yes	41	Programmable Pulse Generator 6
42	354H	PPG7	Yes	42	Programmable Pulse Generator 7
43	350H	PPG8	Yes	43	Programmable Pulse Generator 8
44	34CH	PPG9	Yes	44	Programmable Pulse Generator 9
45	348H	PPG10	Yes	45	Programmable Pulse Generator 10
46	344H	PPG11	Yes	46	Programmable Pulse Generator 11
47	340H	PPG12	Yes	47	Programmable Pulse Generator 12
48	33CH	PPG13	Yes	48	Programmable Pulse Generator 13
49	338H	PPG14	Yes	49	Programmable Pulse Generator 14
50	334H	PPG15	Yes	50	Programmable Pulse Generator 15
51	330H	RLT0	Yes	51	Reload Timer 0
52	32CH	RLT1	Yes	52	Reload Timer 1
53	328H	RLT2	Yes	53	Reload Timer 2
54	324H	RLT3	Yes	54	Reload Timer 3

Downloaded from Arrow.com.

Interrupt vector table MB96(F)34x (3/4)

Vector number	Offset in vector table	Vector name	Cleared by DMA	Index in ICR to program	Description
55	320H	PPGRLT	Yes	55	Reload Timer 6 - dedicated for PPG
56	31CH	ICU0	Yes	56	Input Capture Unit 0
57	318H	ICU1	Yes	57	Input Capture Unit 1
58	314H	ICU2	Yes	58	Input Capture Unit 2
59	310H	ICU3	Yes	59	Input Capture Unit 3
60	30CH	ICU4	Yes	60	Input Capture Unit 4
61	308H	ICU5	Yes	61	Input Capture Unit 5
62	304H	ICU6	Yes	62	Input Capture Unit 6
63	300H	ICU7	Yes	63	Input Capture Unit 7
64	2FCH	OCU0	Yes	64	Output Compare Unit 0
65	2F8H	OCU1	Yes	65	Output Compare Unit 1
66	2F4H	OCU2	Yes	66	Output Compare Unit 2
67	2F0H	OCU3	Yes	67	Output Compare Unit 3
68	2ECH	OCU4	Yes	68	Output Compare Unit 4
69	2E8H	OCU5	Yes	69	Output Compare Unit 5
70	2E4H	OCU6	Yes	70	Output Compare Unit 6
71	2E0H	OCU7	Yes	71	Output Compare Unit 7
72	2DCH	FRT0	Yes	72	Free Running Timer 0
73	2D8H	FRT1	Yes	73	Free Running Timer 1
74	2D4H	IIC0	Yes	74	I2C interface
75	2D0H	IIC1	Yes	75	I2C interface
76	2CCH	ADC0	Yes	76	A/D Converter
77	2C8H	ALARM0	No	77	Alarm Comparator 0 (except MB96F345Dyy or MB96F345Fyy)
78	2C4H	ALARM1	No	78	Alarm Comparator 1 (except MB96F345Dyy or MB96F345Fyy)
79	2C0H	LINR0	Yes	79	LIN USART 0 RX
80	2BCH	LINT0	Yes	80	LIN USART 0 TX
81	2B8H	LINR1	Yes	81	LIN USART 1 RX
82	2B4H	LINT1	Yes	82	LIN USART 1 TX

Downloaded from Arrow.com.

Interrupt vector table MB96(F)34x (4/4)

Vector number	Offset in vector table	Vector name	Cleared by DMA	Index in ICR to program	Description
83	2B0H	LINR2	Yes	83	LIN USART 2 RX
84	2ACH	LINT2	Yes	84	LIN USART 2 TX
85	2A8H	LINR3	Yes	85	LIN USART 3 RX
86	2A4H	LINT3	Yes	86	LIN USART 3 TX
87	2A0H	FLASH_A	No	87	Flash memory A (only Flash devices)
88	29CH	FLASH_B	No	88	Flash memory B (only MB96F348T/H/C)
89	298H	LINR7	Yes	89	LIN USART 7 RX
90	294H	LINT7	Yes	90	LIN USART 7 TX
91	290H	LINR8	Yes	91	LIN USART 8 RX
92	28CH	LINT8	Yes	92	LIN USART 8 TX
93	288H	LINR9	Yes	93	LIN USART 9 RX
94	284H	LINT9	Yes	94	LIN USART 9 TX
95	280H	RTC0	No	95	Real Timer Clock
96	27CH	CAL0	No	96	Clock Calibration Unit
97	278H	DFLASH_A	Yes	97	Data Flash A (only MB96F345Dyy, MB96F345Fyy)

Downloaded from Arrow.com.

■ HANDLING DEVICES

Special care is required for the following when handling the device:

- Latch-up prevention
- Unused pins handling
- External clock usage
- Unused sub clock signal
- Notes on PLL clock mode operation
- Power supply pins (V_{CC}/V_{SS})
- Crystal oscillator circuit
- Turn on sequence of power supply to A/D converter and analog inputs
- Pin handling when not using the A/D converter
- Notes on energization
- Stabilization of power supply voltage
- Serial communication
- Handling of Data Flash

1. Latch-up prevention

CMOS IC chips may suffer latch-up under the following conditions:

- A voltage higher than V_{CC} or lower than V_{SS} is applied to an input or output pin.
- A voltage higher than the rated voltage is applied between V_{CC} pins and V_{SS} pins.
- The AV_{CC} power supply is applied before the V_{CC} voltage.

Latch-up may increase the power supply current dramatically, causing thermal damages to the device.

For the same reason, extra care is required to not let the analog power-supply voltage (AV_{CC}, AVRH) exceed the digital power-supply voltage.

2. Unused pins handling

Unused input pins can be left open when the input is disabled (corresponding bit of Port Input Enable register PIER = 0).

Leaving unused input pins open when the input is enabled may result in misbehavior and possible permanent damage of the device. They must therefore be pulled up or pulled down through resistors. To prevent latch-up, those resistors should be more than 2 kΩ.


Unused bidirectional pins can be set either to the output state and be then left open, or to the input state with either input disabled or external pull-up/pull-down resistor as described above.

3. External clock usage

The permitted frequency range of an external clock depends on the oscillator type and configuration. See AC Characteristics for detailed modes and frequency limits. Single and opposite phase external clocks must be connected as follows:

1. Single phase external clock


- When using a single phase external clock, X0 pin must be driven and X1 pin left open.

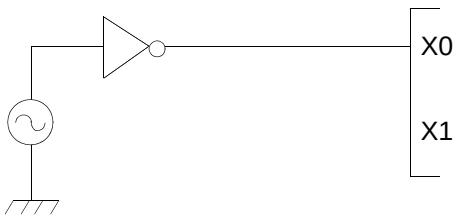

Downloaded from Arrow.com.

2. Opposite phase external clock

- When using an opposite phase external clock, X1 (X1A) must be supplied with a clock signal which has the opposite phase to the X0 (X0A) pins.

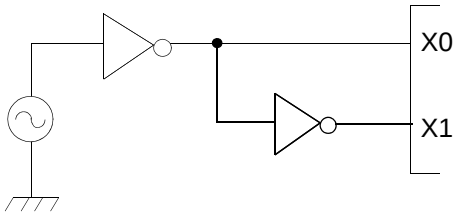

4. Unused sub clock signal

If the pins X0A and X1A are not connected to an oscillator, a pull-down resistor must be connected on the X0A pin and the X1A pin must be left open.

5. Notes on PLL clock mode operation

If the PLL clock mode is selected and no external oscillator is operating or no external clock is supplied, the microcontroller attempts to work with the free oscillating PLL. Performance of this operation, however, cannot be guaranteed.

6. Power supply pins (V_{CC}/V_{SS})

It is required that all V_{CC}-level as well as all V_{SS}-level power supply pins are at the same potential. If there is more than one V_{CC} or V_{SS} level, the device may operate incorrectly or be damaged even within the guaranteed operating range.

V_{CC} and V_{SS} must be connected to the device from the power supply with lowest possible impedance.

As a measure against power supply noise, it is required to connect a bypass capacitor of about 0.1 µF between V_{CC} and V_{SS} as close as possible to V_{CC} and V_{SS} pins.

7. Crystal oscillator and ceramic resonator circuit

Noise at X0, X1 pins or X0A, X1A pins might cause abnormal operation. It is required to provide bypass capacitors with shortest possible distance to X0, X1 pins and X0A, X1A pins, crystal oscillator (or ceramic resonator) and ground lines, and, to the utmost effort, that the lines of oscillation circuit do not cross the lines of other circuits.

It is highly recommended to provide a printed circuit board art work surrounding X0, X1 pins and X0A, X1A pins with a ground area for stabilizing the operation.

It is highly recommended to evaluate the quartz/MCU or resonator/MCU system at the quartz or resonator manufacturer, especially when using low-Q resonators at higher frequencies.

8. Turn on sequence of power supply to A/D converter and analog inputs

It is required to turn the A/D converter power supply (AV_{CC}, AVRH, AVRL) and analog inputs (ANn) on after turning the digital power supply (V_{CC}) on.

It is also required to turn the digital power off after turning the A/D converter supply and analog inputs off. In this case, the voltage must not exceed AVRH or AV_{CC} (turning the analog and digital power supplies simultaneously on or off is acceptable).

9. Pin handling when not using the A/D converter

It is required to connect the unused pins of the A/D converter as AV_{CC} = V_{CC}, AV_{SS} = AVRH = AVRL = V_{SS}.

10. Notes on Power-on

To prevent malfunction of the internal voltage regulator, supply voltage profile while turning the power supply on should be slower than 50µs from 0.2 V to 2.7 V.

Downloaded from Arrow.com.

11. Stabilization of power supply voltage

If the power supply voltage varies acutely even within the operation safety range of the Vcc power supply voltage, a malfunction may occur. The Vcc power supply voltage must therefore be stabilized. As stabilization guidelines, the power supply voltage must be stabilized in such a way that Vcc ripple fluctuations (peak to peak value) in the commercial frequencies (50 to 60 Hz) fall within 10% of the standard Vcc power supply voltage and the transient fluctuation rate becomes 0.1V/µs or less in instantaneous fluctuation for power supply switching.

12. Serial communication

There is a possibility to receive wrong data due to noise or other causes on the serial communication.
Therefore, design a printed circuit board so as to avoid noise.
Consider receiving of wrong data when designing the system. For example apply a checksum and retransmit the data if an error occurs.

13. Handling of Data Flash

The Data Flash requires different and additional control signals for parallel programming. Please check with your programming equipment maker for support of this interface.

Downloaded from Arrow.com.

■ ELECTRICAL CHARACTERISTICS

1. Absolute Maximum Ratings

Parameter	Symbol	Rating		Unit	Remarks
		Min	Max		
Power supply voltage	V_{CC}	V_{SS} - 0.3	V_{SS} + 6.0	V	
	AV_{CC}	V_{SS} - 0.3	V_{SS} + 6.0	V	$V_{CC} = AV_{CC}$ *1
AD Converter voltage references	AVRH, AVRL	V_{SS} - 0.3	V_{SS} + 6.0	V	$AV_{CC} \geq AVRH$, $AV_{CC} \geq AVRL$, $AVRH > AVRL$, $AVRL \geq AV_{SS}$
Input voltage	V_I	V_{SS} - 0.3	V_{SS} + 6.0	V	$V_I \leq V_{CC}$ + 0.3V *2
Output voltage	V_O	V_{SS} - 0.3	V_{SS} + 6.0	V	$V_O \leq V_{CC}$ + 0.3V *2
Maximum Clamp Current	I_{CLAMP}	-4.0	+4.0	mA	Applicable to general purpose I/O pins *3
Total Maximum Clamp Current	$\Sigma\lvert I_{CLAMP}\rvert$	-	40	mA	Applicable to general purpose I/O pins *3
“L” level maximum output current	I_{OL1}	-	15	mA	Normal outputs with driving strength set to 5mA
“L” level average output current	I_{OLAV1}	-	5	mA	Normal outputs with driving strength set to 5mA
“L” level maximum overall output current	ΣI_{OL1}	-	100	mA	Normal outputs
“L” level average overall output current	ΣI_{OLAV1}	-	50	mA	Normal outputs
”H” level maximum output current	I_{OH1}	-	-15	mA	Normal outputs with driving strength set to 5mA
”H” level average output current	I_{OHAV1}	-	-5	mA	Normal outputs with driving strength set to 5mA
”H” level maximum overall output current	ΣI_{OH1}	-	-100	mA	Normal outputs
”H” level average overall output current	ΣI_{OHAV1}	-	-50	mA	Normal outputs
Permitted Power dissipation (Flash devices in QFP package) *4	P_D	-	430*5	mW	T_A=105°C
		-	750*5	mW	T_A=90°C
		-	540*5	mW	T_A=125°C, no Flash program/ erase *6
Permitted Power dissipation (MB96F346/F347/F348 in LQFP package) *4	P_D	-	375*5	mW	T_A=105°C
		-	750*5	mW	T_A=85°C
		-	470*5	mW	T_A=125°C, no Flash program/ erase *6
		-	560*5	mW	T_A=120°C, no Flash program/ erase *6

Downloaded from Arrow.com.

Parameter	Symbol	Rating		Unit	Remarks
		Min	Max		
Permitted Power dissipation (MB96F345 in LQFP package) *4	P_D	-	335*5	mW	T_A=105°C
		-	670*5	mW	T_A=85°C
		-	840*5	mW	T_A=75°C
		-	420*5	mW	T_A=125°C, no Flash program/ erase *6
		-	590*5	mW	T_A=115°C, no Flash program/ erase *6
Permitted Power dissipation (Mask ROM devices) *4	P_D	-	350	mW	T_A=105°C
		-	360	mW	T_A=125°C *6
Operating ambient temperature	T_A	0	+70	°C	MB96V300B
		-40	+105		
		-40	+125		*6
Storage temperature	T_{STG}	-55	+150	°C	


*1: AV_{CC} and V_{CC} must be set to the same voltage. It is required that AV_{CC} does not exceed V_{CC} and that the voltage at the analog inputs does not exceed AV_{CC} neither when the power is switched on.

*2: V_I and V_O should not exceed V_{CC} + 0.3 V. V_I should also not exceed the specified ratings. However if the maximum current to/from a input is limited by some means with external components, the I_{CLAMP} rating supersedes the V_I rating. Input/output voltages of standard ports depend on V_{CC}.

*3:
- Applicable to all general purpose I/O pins (Pnn_m)
- Use within recommended operating conditions.
- Use at DC voltage (current)
- The +B signal should always be applied a limiting resistance placed between the +B signal and the microcontroller.
- The value of the limiting resistance should be set so that when the +B signal is applied the input current to the microcontroller pin does not exceed rated values, either instantaneously or for prolonged periods.
- Note that when the microcontroller drive current is low, such as in the power saving modes, the +B input potential may pass through the protective diode and increase the potential at the VCC pin, and this may affect other devices.
- Note that if a +B signal is input when the microcontroller power supply is off (not fixed at 0 V), the power supply is provided from the pins, so that incomplete operation may result.
- Note that if the +B input is applied during power-on, the power supply is provided from the pins and the resulting supply voltage may not be sufficient to operate the Power reset (except devices with persistent low voltage reset in internal vector mode).

Downloaded from Arrow.com.

* • Sample recommended circuits:

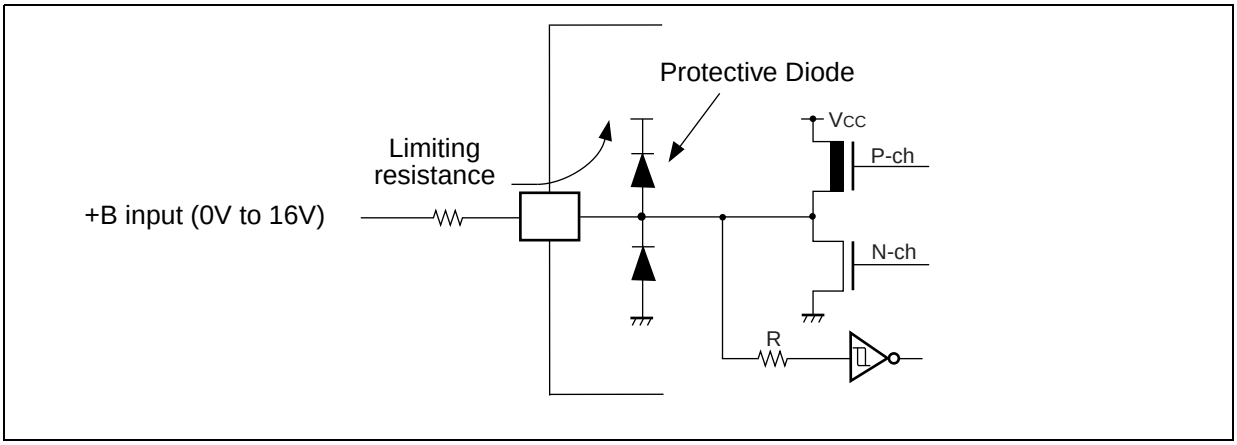

*4: The maximum permitted power dissipation depends on the ambient temperature, the air flow velocity and the thermal conductance of the package on the PCB.
The actual power dissipation depends on the customer application and can be calculated as follows:
$P_D = P_{IO} + P_{INT}$
$P_{IO} = \sum (V_{OL} * I_{OL} + V_{OH} * I_{OH})$ (IO load power dissipation, sum is performed on all IO ports)
$P_{INT} = V_{CC} * (I_{CC} + I_A)$ (internal power dissipation)
I_{CC} is the total core current consumption into V_{CC} as described in the “DC characteristics” and depends on the selected operation mode and clock frequency and the usage of functions like Flash programming or the clock modulator.
I_A is the analog current consumption into AV_{CC}.

*5: Worst case value for a package mounted on single layer PCB at specified T_A without air flow.

*6: Please contact Fujitsu for reliability limitations when using under these conditions.

WARNING: Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed any of these ratings.

2. Recommended Operating Conditions

Parameter	Symbol	Value			Unit	Remarks
		Min	Typ	Max		
Power supply voltage	V_{CC}	3.0	-	5.5	V	
Smoothing capacitor at C pin	C_S	3.5	4.7 - 10	15	µF	Use a low inductance capacitor (for example X7R ceramic capacitor)

WARNING: The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use semiconductor devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their representatives beforehand.

Downloaded from Arrow.com.

3. DC characteristics

(T_A = -40°C to 125°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)

Parameter	Symbol	Pin	Condition	Value			Unit	Remarks
				Min	Typ	Max		
Input H voltage	V_{IH}	Port inputs Pnn_m	CMOS Hysteresis 0.8/0.2 input selected	0.8 V_{CC}	-	V_{CC} + 0.3	V	
			CMOS Hysteresis 0.7/0.3 input selected	0.7 V_{CC}	-	V_{CC} + 0.3	V	$V_{CC} \geq 4.5V$
				0.74 V_{CC}	-	V_{CC} + 0.3	V	$V_{CC} < 4.5V$
			AUTOMOTIVE Hysteresis input selected	0.8 V_{CC}	-	V_{CC} + 0.3	V	
			TTL input selected	2.0	-	V_{CC} + 0.3	V	
	V_{IHX0F}	X0	External clock in “Fast Clock Input mode”	0.8 V_{CC}	-	V_{CC} + 0.3	V	Not available in MB96F34xY/R/AxA
	V_{IHX0S}	X0,X1, X0A,X1A	External clock in “oscillation mode”	2.5	-	V_{CC} + 0.3	V	
	V_{IHR}	RSTX	-	0.8 V_{CC}	-	V_{CC} + 0.3	V	CMOS Hysteresis input
	V_{IHM}	MD2-MD0	-	V_{CC} - 0.3	-	V_{CC} + 0.3	V	
Input L voltage	V_{IL}	Port inputs Pnn_m	CMOS Hysteresis 0.8/0.2 input selected	V_{SS} - 0.3	-	0.2 V_{CC}	V	
			CMOS Hysteresis 0.7/0.3 input selected	V_{SS} - 0.3	-	0.3 V_{CC}	V	
			AUTOMOTIVE Hysteresis input selected	V_{SS} - 0.3	-	0.5 V_{CC}	V	$V_{CC} \geq 4.5V$
				V_{SS} - 0.3	-	0.46 V_{CC}		$V_{CC} < 4.5V$
			TTL input selected	V_{SS} - 0.3	-	0.8	V	
	V_{ILX0F}	X0	External clock in “Fast Clock Input mode”	V_{SS} - 0.3	-	0.2 V_{CC}	V	Not available in MB96F34xY/R/AxA
	V_{ILX0S}	X0,X1, X0A,X1A	External clock in “oscillation mode”	V_{SS} - 0.3	-	0.4	V	
	V_{ILR}	RSTX	-	V_{SS} - 0.3	-	0.2 V_{CC}	V	CMOS Hysteresis input
	V_{ILM}	MD2-MD0	-	V_{SS} - 0.3	-	V_{SS} + 0.3	V	

Downloaded from Arrow.com.

(T_A = -40°C to 125°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)

Parameter	Symbol	Pin	Condition	Value			Unit	Remarks
				Min	Typ	Max		
Output H voltage	V_{OH2}	Normal outputs	4.5V ≤ V_{CC} ≤ 5.5V I_{OH} = -2mA 3.0V ≤ V_{CC} < 4.5V I_{OH} = -1.6mA	V_{CC} - 0.5	-	-	V	Driving strength set to 2mA
	V_{OH5}	Normal outputs	4.5V ≤ V_{CC} ≤ 5.5V I_{OH} = -5mA 3.0V ≤ V_{CC} < 4.5V I_{OH} = -3mA	V_{CC} - 0.5	-	-	V	Driving strength set to 5mA
	V_{OH3}	3mA out-puts	4.5V ≤ V_{CC} ≤ 5.5V I_{OH} = -3mA 3.0V ≤ V_{CC} < 4.5V I_{OH} = -2mA	V_{CC} - 0.5	-	-	V	
Output L voltage	V_{OL2}	Normal outputs	4.5V ≤ V_{CC} ≤ 5.5V I_{OL} = +2mA 3.0V ≤ V_{CC} < 4.5V I_{OL} = +1.6mA	-	-	0.4	V	Driving strength set to 2mA
	V_{OL5}	Normal outputs	4.5V ≤ V_{CC} ≤ 5.5V I_{OL} = +5mA 3.0V ≤ V_{CC} < 4.5V I_{OL} = +3mA	-	-	0.4	V	Driving strength set to 5mA
	V_{OL3}	3mA out-puts	3.0V ≤ V_{CC} ≤ 5.5V I_{OL} = +3mA	-	-	0.4	V	
Input leak current	I_{IL}	Pnn_m	V_{SS} < V_I < V_{CC} AV_{SS}, AVRL < V_I < AV_{CC}, AVRH	-1	-	+1	µA	Single port pin
Pull-up resistance	R_{UP}	Pnn_m, $\overline{RSTX}$	V_{CC} = 3.3V ± 10%	40	100	160	kΩ	
			V_{CC} = 5.0V ± 10%	25	50	100	kΩ	

Downloaded from Arrow.com.

(T_A = -40°C to 125°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)

Parameter	Symbol	Condition (at T_A)		Value			Remarks
				Typ	Max	Unit	
Power supply current in Run modes*	I_{CCPLL}	PLL Run mode with CLKS1/2 = 48MHz, CLKB = CLKP1/2 = 24MHz (CLKRC and CLKSC stopped. Core voltage at 1.9V)	+25°C	35	44	mA	Flash devices at 0 Flash wait states
			+125°C	36	47		
			+25°C	17	23	mA	MB96345/346 at 0 ROM wait states
			+125°C	18	25		
		PLL Run mode with CLKS1/2 = CLKB = CLKP1= 56MHz, CLKP2 = 28MHz (CLKRC and CLKSC stopped. Core voltage at 1.9V)	+25°C	44	57	mA	MB96F346/F347/F348 at 2 Flash wait states
			+125°C	45	60		
			+25°C	25	35	mA	MB96345/346 at 2 ROM wait states
			+125°C	26	37		
		PLL Run mode with CLKS1/2 = 72MHz, CLKB = CLKP1 = 36MHz, CLKP2 = 18MHz (CLKRC and CLKSC stopped. Core voltage at 1.9V)	+25°C	38	50	mA	MB96F346/F347/F348Y/R/Ayy at 1 Flash wait state
			+125°C	39	53		
		PLL Run mode with CLKS1/2 = 80MHz, CLKB = CLKP1 = 40MHz, CLKP2 = 20MHz (CLKRC and CLKSC stopped. Core voltage at 1.9V)	+25°C	TBD	TBD	mA	MB96F345 at 1 Flash wait state
			+125°C	TBD	TBD		
		PLL Run mode with CLKS1/2 = 96MHz, CLKB = CLKP1= 48MHz, CLKP2 = 24MHz (CLKRC and CLKSC stopped. Core voltage at 1.9V)	+25°C	49	62	mA	MB96F348T/H/CyB/C at 1 Flash wait state
			+125°C	50	65		
			+25°C	26	36	mA	MB96345/346 at 1 ROM wait state
			+125°C	27	38		
	I_{CCMAIN}	Main Run mode with CLKS1/2 = CLKB = CLKP1/2 = 4MHz (CLKPLL, CLKSC and CLKRC stopped)	+25°C	4.5	5.5	mA	Flash devices at 1 Flash wait state
			+125°C	5.1	8.5		
			+25°C	2.5	3.5	mA	MB96345/346 at 1 ROM wait state
			+125°C	3.1	5.5		

Downloaded from Arrow.com.

(T_A = -40°C to 125°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)

Parameter	Symbol	Condition (at T_A)		Value			Remarks
				Typ	Max	Unit	
Power supply current in Run modes*	I_{CCRCH}	RC Run mode with CLKS1/2 = CLKB = CLKP1/2 = 2MHz (CLKMC, CLKPLL and CLKSC stopped)	+25°C	2.9	4	mA	Flash devices at 1 Flash wait state
			+125°C	3.5	6.5		
			+25°C	1.7	2.7	mA	MB96345/346 at 1 ROM wait state
			+125°C	2.3	4.7		
	I_{CCRCL}	RC Run mode with CLKS1/2 = CLKB = CLKP1/2 = 100kHz, SMCR:LPMS = 0 (CLKMC, CLKPLL and CLKSC stopped. Voltage regulator in high power mode)	+25°C	0.4	0.6	mA	MB96F346/F347/F348 at 1 Flash wait state
			+125°C	0.9	3.5		
			+25°C	0.18	0.3	mA	MB96F345 at 1 Flash wait state
			+125°C	0.68	3.3		
			+25°C	0.4	0.6	mA	MB96345/346 at 1 ROM wait state
			+125°C	0.9	2.4		
		RC Run mode with CLKS1/2 = CLKB = CLKP1/2 = 100kHz, SMCR:LPMS = 1 (CLKMC, CLKPLL and CLKSC stopped. Voltage regulator in low power mode, no Flash programming/erasing allowed)	+25°C	0.15	0.25	mA	Flash devices at 1 Flash wait state
			+125°C	0.65	3.2		
			+25°C	0.15	0.25	mA	MB96345/346 at 1 ROM wait state
			+125°C	0.65	2.1		
	I_{CCSUB}	Sub Run mode with CLKS1/2 = CLKB = CLKP1/2 = 32kHz (CLKMC, CLKPLL and CLKRC stopped, no Flash programming/erasing allowed)	+25°C	0.1	0.2	mA	Flash devices at 1 Flash wait state
			+125°C	0.6	3		
			+25°C	0.1	0.2	mA	MB96345/346 at 1 ROM wait state
			+125°C	0.6	2		

Downloaded from Arrow.com.

(T_A = -40°C to 125°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)

Parameter	Symbol	Condition (at T_A)		Value			Remarks
				Typ	Max	Unit	
Power supply current in Sleep modes*	I_{CCSPLL}	PLL Sleep mode with CLKS1/2 = 48MHz, CLKP1/2 = 24MHz (CLKRC and CLKSC stopped. Core voltage at 1.9V)	+25°C	9	10.5	mA	Flash devices
			+125°C	9.7	13		
			+25°C	8	9.5	mA	MB96345/346
			+125°C	8.7	11.5		
		PLL Sleep mode with CLKS1/2 = CLKP1= 56MHz, CLKP2 = 28MHz (CLKRC and CLKSC stopped. Core voltage at 1.9V)	+25°C	14	15.5	mA	MB96F346/F347/F348
			+125°C	14.8	18		
			+25°C	13.5	15	mA	MB96345/346
			+125°C	14.3	17		
		PLL Sleep mode with CLKS1/2 = 72MHz, CLKP1 = 36MHz, CLKP2 = 18MHz (CLKRC and CLKSC stopped. Core voltage at 1.9V)	+25°C	10.5	12	mA	MB96F346/F347/F348Y/R/Ayy
			+125°C	11.3	14.5		
		PLL Sleep mode with CLKS1/2 = 80MHz, CLKP1 = 40MHz, CLKP2 = 20MHz (CLKRC and CLKSC stopped. Core voltage at 1.9V)	+25°C	TBD	TBD	mA	MB96F345
			+125°C	TBD	TBD		
		PLL Sleep mode with CLKS1/2 = 96MHz, CLKP1= 48MHz, CLKP2 = 24MHz (CLKRC and CLKSC stopped. Core voltage at 1.9V)	+25°C	15	16.5	mA	MB96F348T/H/CyB/C
			+125°C	15.8	19		
			+25°C	14	15.5	mA	MB96345/346
			+125°C	14.8	17.5		
	$I_{CCSMAIN}$	Main Sleep mode with CLKS1/2 = CLKP1/2 = 4MHz (CLKPLL, CLKSC and CLKRC stopped)	+25°C	1.5	1.8	mA	Flash devices
			+125°C	2	4.5		
			+25°C	1.5	1.8	mA	MB96345/346
			+125°C	2	3.8		

Downloaded from Arrow.com.

(T_A = -40°C to 125°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)

Parameter	Symbol	Condition (at T_A)		Value			Remarks
				Typ	Max	Unit	
Power supply current in Sleep modes*	I_{CCSRCH}	RC Sleep mode with CLKS1/2 = CLKP1/2 = 2MHz (CLKMC, CLKPLL and CLKSC stopped)	+25°C	0.9	1.4	mA	Flash devices
			+125°C	1.5	4.1		
			+25°C	0.9	1.4	mA	MB96345/346
			+125°C	1.5	3.1		
	I_{CCSRCL}	RC Sleep mode with CLKS1/2 = CLKP1/2 = 100kHz, SMCR:LPMSS = 0 (CLKMC, CLKPLL and CLKSC stopped. Voltage regulator in high power mode)	+25°C	0.3	0.5	mA	MB96F346/F347/F348
			+125°C	0.8	3.4		
			+25°C	0.09	0.2	mA	MB96F345
			+125°C	0.59	3.1		
			+25°C	0.3	0.5	mA	MB96345/346
			+125°C	0.8	2.3		
		RC Sleep mode with CLKS1/2 = CLKP1/2 = 100kHz, SMCR:LPMSS = 1 (CLKMC, CLKPLL and CLKSC stopped. Voltage regulator in low power mode)	+25°C	0.06	0.15	mA	Flash devices
			+125°C	0.56	3		
			+25°C	0.06	0.15	mA	MB96345/346
			+125°C	0.56	1.9		
	I_{CCSSUB}	Sub Sleep mode with CLKS1/2 = CLKP1/2 = 32kHz (CLKMC, CLKPLL and CLKRC stopped)	+25°C	0.04	0.12	mA	Flash devices
			+125°C	0.54	2.9		
			+25°C	0.04	0.12	mA	MB96345/346
			+125°C	0.54	1.85		

Downloaded from Arrow.com.

(T_A = -40°C to 125°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)

Parameter	Symbol	Condition (at T_A)		Value			Remarks
				Typ	Max	Unit	
Power supply current in Timer modes*	I_{CCTPLL}	PLL Timer mode with CLKMC = 4MHz, CLKPLL = 48MHz (CLKRC and CLKSC stopped. Core voltage at 1.9V)	+25°C	1.6	2	mA	Flash devices
			+125°C	2.1	5		
			+25°C	1.6	2	mA	MB96345/346
			+125°C	2.1	4		
	$I_{CCTMAIN}$	Main Timer mode with CLKMC = 4MHz, SMCR:LPMSS = 0 (CLKPLL, CLKRC and CLKSC stopped. Voltage regulator in high power mode)	+25°C	0.35	0.5	mA	MB96F346/F347/F348
			+125°C	0.85	3.3		
			+25°C	0.13	0.2	mA	MB96F345
			+125°C	0.63	3		
			+25°C	0.35	0.5	mA	MB96345/346
			+125°C	0.85	2.3		
		Main Timer mode with CLKMC = 4MHz, SMCR:LPMSS = 1 (CLKPLL, CLKRC and CLKSC stopped. Voltage regulator in low power mode)	+25°C	0.1	0.15	mA	Flash devices
			+125°C	0.6	2.9		
			+25°C	0.1	0.15		MB96345/346
			+125°C	0.6	1.9		
	I_{CCTRCH}	RC Timer mode with CLKRC = 2MHz, SMCR:LPMSS = 0 (CLKMC, CLKPLL and CLKSC stopped. Voltage regulator in high power mode)	+25°C	0.35	0.5	mA	MB96F346/F347/F348
			+125°C	0.85	3.3		
			+25°C	0.13	0.2	mA	MB96F345
			+125°C	0.63	3		
			+25°C	0.35	0.5	mA	MB96345/346
			+125°C	0.85	2.3		
		RC Timer mode with CLKRC = 2MHz, SMCR:LPMSS = 1 (CLKMC, CLKPLL and CLKSC stopped. Voltage regulator in low power mode)	+25°C	0.1	0.15	mA	Flash devices
			+125°C	0.6	2.9		
			+25°C	0.1	0.15	mA	MB96345/346
			+125°C	0.6	1.9		

Downloaded from Arrow.com.

(T_A = -40°C to 125°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)

Parameter	Symbol	Condition (at T_A)		Value			Remarks
				Typ	Max	Unit	
Power supply current in Timer modes*	I_{CCTRCL}	RC Timer mode with CLKRC = 100kHz, SMCR:LPMSS = 0 (CLKMC, CLKPLL and CLKSC stopped. Voltage regulator in high power mode)	+25°C	0.3	0.45	mA	MB96F346/F347/F348
			+125°C	0.8	3.2		
			+25°C	0.08	0.15	mA	MB96F345
			+125°C	0.58	2.95		
			+25°C	0.3	0.45	mA	MB96345/346
			+125°C	0.8	2.2		
		RC Timer mode with CLKRC = 100kHz, SMCR:LPMSS = 1 (CLKMC, CLKPLL and CLKSC stopped. Voltage regulator in low power mode)	+25°C	0.05	0.1	mA	Flash devices
			+125°C	0.55	2.85		
			+25°C	0.05	0.1	mA	MB96345/346
			+125°C	0.55	1.85		
	I_{CCTSUB}	Sub Timer mode with CLKSC = 32kHz (CLKMC, CLKPLL and CLKRC stopped)	+25°C	0.03	0.1	mA	Flash devices
			+125°C	0.53	2.85		
			+25°C	0.03	0.1	mA	MB96345/346
			+125°C	0.53	1.85		
Power supply current in Stop Mode	I_{CCH}	VRCR:LPMB[2:0] = 110_B (Core voltage at 1.8V)	+25°C	0.02	0.08	mA	Flash devices
			+125°C	0.52	2.8		
			+25°C	0.02	0.08	mA	MB96345/346
			+125°C	0.52	1.8		
		VRCR:LPMB[2:0] = 000_B (Core voltage at 1.2V)	+25°C	0.015	0.06	mA	Flash devices
			+125°C	0.4	2.3		
			+25°C	0.015	0.06	mA	MB96345/346
			+125°C	0.4	1.4		
Power supply current for active Low Voltage detector	I_{CCLVD}	Low voltage detector enabled (RCR:LVDE = 1)	-	5	10	µA	MB96F345 Must be added to all current above
			+25°C	90	140	µA	Other devices Must be added to all current above
			+125°C	100	150		

Downloaded from Arrow.com.

(T_A = -40°C to 125°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)

Parameter	Symbol	Condition (at T_A)		Value			Remarks
				Typ	Max	Unit	
Power supply current for active Clock modulator	$I_{CCCLOMO}$	Clock modulator enabled (CMCR:PDX = 1)	-	3	4.5	mA	Must be added to all current above
Flash Write/ Erase current	$I_{CCFLASH}$	Current for one Flash module	-	15	40	mA	Must be added to all current above
	$I_{CCDFLASH}$	Current for one Data Flash module		10	20	mA	Must be added to all current above
Input capacitance	C_{IN}	-	-	5	15	pF	Other than C, AV_{CC}, AV_{SS}, AVRH, AVRL, V_{CC}, V_{SS}

* The power supply current is measured with a 4MHz external clock connected to the Main oscillator and a 32kHz external clock connected to the Sub oscillator. See chapter “Standby mode and voltage regulator control circuit” of the Hardware Manual for further details about voltage regulator control.

Downloaded from Arrow.com.


4. AC Characteristics

Source Clock timing

(T_A = -40°C to 125°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)

Parameter	Symbol	Pin	Value			Unit	Remarks
			Min	Typ	Max		
Clock frequency	f_C	X0, X1	3	-	16	MHz	When using a crystal oscillator, PLL off
			0	-	16	MHz	When using an opposite phase external clock, PLL off
			3.5	-	16	MHz	When using a crystal oscillator or opposite phase external clock, PLL on
Clock frequency	f_{FCI}	X0	0	-	56	MHz	When using a single phase external clock in “Fast Clock Input mode” (not available in MB96F34xY/R/AxA), PLL off
			3.5	-	56	MHz	When using a single phase external clock in “Fast Clock Input mode” (not available in MB96F34xY/R/AxA), PLL on
Clock frequency	f_{CL}	X0A, X1A	32	32.768	100	kHz	When using an oscillation circuit
			0	-	100	kHz	When using an opposite phase external clock
		X0A	0	-	50	kHz	When using a single phase external clock
Clock frequency	f_{CR}	-	50	100	200	kHz	When using slow frequency of RC oscillator
			1	2	4	MHz	When using fast frequency of RC oscillator
PLL Clock frequency	f_{CLKVCO}	-	64	-	200	MHz	Permitted VCO output frequency of PLL (CLKVCO)
PLL Phase Jitter	T_{PSKEW}	-	-	-	± 5	ns	For CLKMC (PLL input clock) ≥ 4MHz
Input clock pulse width	P_{WH}, P_{WL}	X0,X1	8	-	-	ns	Duty ratio is about 30% to 70%
Input clock pulse width	P_{WHL}, P_{WLL}	X0A,X1A	5	-	-	µs	

Downloaded from Arrow.com.

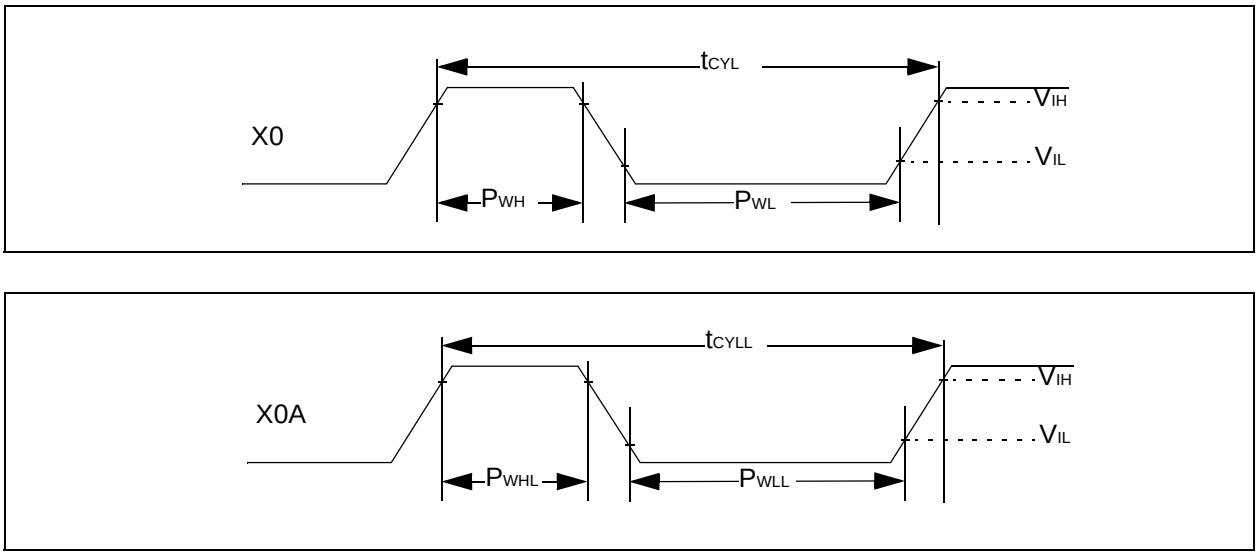

Internal Clock timing

(T_A = -40°C to 125°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)


Parameter	Symbol	Core Voltage Settings				Unit	Remarks
		1.8V		1.9V			
		Min	Max	Min	Max		
Internal System clock frequency (CLKS1 and CLKS2)	f_{CLKS1}, f_{CLKS2}	0	92	0	96	MHz	Others than below
		0	86	0	96	MHz	MB96F348T/H/CxB/C
		0	72	0	80	MHz	MB96F345
		0	68	0	74	MHz	MB96F34xY/R/Axx
Internal CPU clock frequency (CLKB), internal peripheral clock frequency (CLKP1)	f_{CLKB}, f_{CLKP1}	0	52	0	56	MHz	Others than below
		0	36	0	40	MHz	MB96F345
Internal peripheral clock frequency (CLKP2)	f_{CLKP2}	0	28	0	32	MHz	Others than below
		0	26	0	28	MHz	MB96F34xY/R/Axx

Downloaded from Arrow.com.

External Reset timing

(T_A = -40°C to 125°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)


Parameter	Symbol	Pin	Value			Unit	Remarks
			Min	Typ	Max		
Reset input time	t_{RSTL}	RSTX	500	-	-	ns	

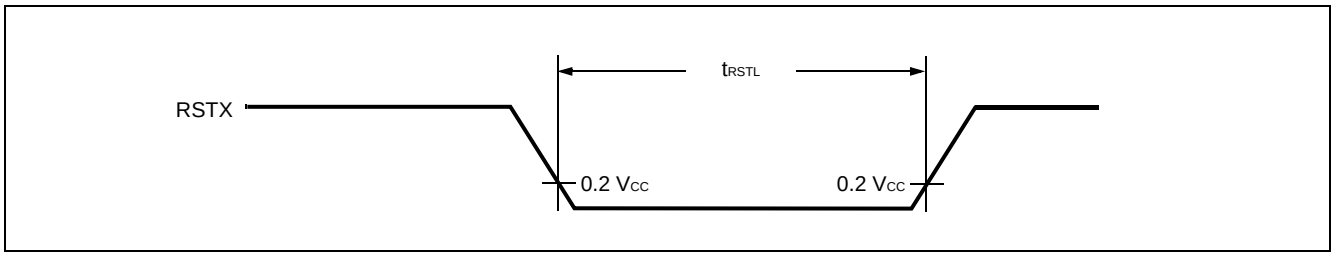

Power On Reset timing

(T_A = -40°C to 125°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)

Parameter	Symbol	Pin	Value			Unit	Remarks
			Min	Typ	Max		
Power on rise time	t_R	Vcc	0.05	-	30	ms	
Power off time	t_{OFF}	Vcc	1	-	-	ms	

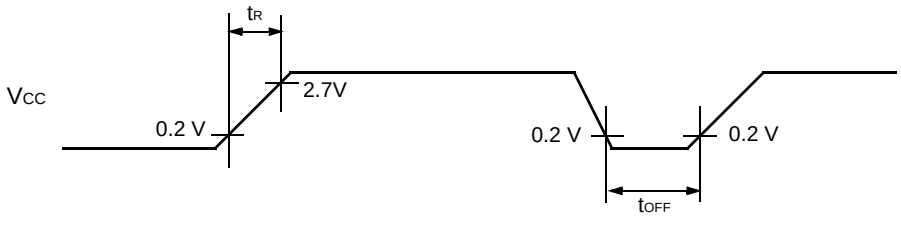

If the power supply is changed too rapidly, a power-on reset may occur.
We recommend a smooth startup by restraining voltages when changing the power supply voltage during operation, as shown in the figure below.




Downloaded from Arrow.com.

External Input timing

(T_A = -40°C to 125°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)

Parameter	Symbol	Pin	Condition	Value		Unit	Used Pin input function
				Min	Max		
Input pulse width	t_{INH} t_{INL}	INTn(_R)	—	200	—	ns	External Interrupt
		NMI(_R)					NMI
		Pnn_m		$2*t_{CLKP1}$ + 200 (t_{CLKP1}=1/ f_{CLKP1})	—	ns	General Purpose IO
		TINn(_R)					Reload Timer
		TTGn(_R)					PPG Trigger input
		ADTG(_R)					AD Converter Trigger
		FRCKn(_R)					Free Running Timer external clock
		INn(_R)					Input Capture

Note : Relocated Resource Inputs have same characteristics

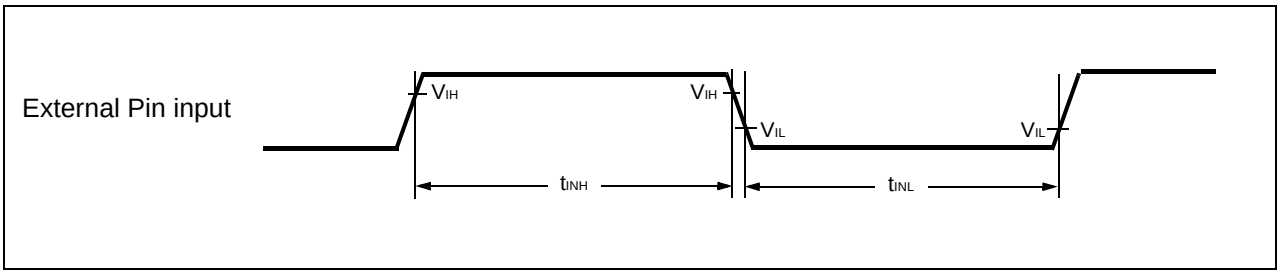

External Bus timing

Note: The values given below are for an I/O driving strength IO_{drive} = 5mA. If IO_{drive} is 2mA, all the maximum output timing described in the different tables must then be increased by 10ns.

Downloaded from Arrow.com.

Basic Timing

(T_A = –40 °C to +125 °C, V_{CC} = 5.0 V ± 10%, V_{SS} = 0.0 V, IO_{drive} = 5mA, C_L = 50pF)


Parameter	Symbol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
ECLK	t_{CYC}	ECLK	—	25	—	ns	
	t_{CHCL}			t_{CYC}/2-5	t_{CYC}/2+5		
	t_{CLCH}			t_{CYC}/2-5	t_{CYC}/2+5		
ECLK → UBX/ LBX / CSn time	t_{CHCBH}	CSn, UBX, LBX, ECLK	—	-20	20	ns	
	t_{CHCBL}			-20	20		
	t_{CLCBH}			-20	20		
	t_{CLCBL}			-20	20		
ECLK → ALE time	t_{CHLH}	ALE, ECLK	—	-10	10	ns	
	t_{CHLL}			-10	10		
	t_{CLLH}			-10	10		
	t_{CLLL}			-10	10		
ECLK → address valid time	t_{CHAV}	A[23:16], ECLK	—	-15	15	ns	
	t_{CLAV}			-15	15		
	t_{CLADV}	AD[15:0], ECLK	—	-15	15	ns	
	t_{CHADV}			-15	15		
ECLK → RDX /WRX time	t_{CHRWH}	RDX, WRX, WRLX,WRHX, ECLK	—	-10	10	ns	
	t_{CHRWL}			-10	10		
	t_{CLRWH}			-10	10		
	t_{CLRWL}			-10	10		

Downloaded from Arrow.com.

(T_A = –40 °C to +125 °C, V_{CC} = 3.0 to 4.5V, V_{SS} = 0.0 V, IO_{drive} = 5mA, C_L = 50pF)

Parameter	Symbol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
ECLK	t_{CYC}	ECLK	—	30	—	ns	
	t_{CHCL}			t_{CYC}/2-8	t_{CYC}/2+8		
	t_{CLCH}			t_{CYC}/2-8	t_{CYC}/2+8		
ECLK → UBX/ LBX / CSn time	t_{CHCBH}	CSn, UBX, LBX, ECLK	—	-25	25	ns	
	t_{CHCBL}			-25	25		
	t_{CLCBH}			-25	25		
	t_{CLCBL}			-25	25		
ECLK → ALE time	t_{CHLH}	ALE, ECLK	—	-15	15	ns	
	t_{CHLL}			-15	15		
	t_{CLLH}			-15	15		
	t_{CLLL}			-15	15		
ECLK → address valid time	t_{CHAV}	A[23:16], ECLK	—	-20	20	ns	
	t_{CLAV}			-20	20		
	t_{CLADV}	AD[15:0], ECLK	—	-20	20	ns	
	t_{CHADV}			-20	20		
ECLK → RDX /WRX time	t_{CHRWH}	RDX, WRX, WRLX, WRHX, ECLK	—	-15	15	ns	
	t_{CHRWL}			-15	15		
	t_{CLRWH}			-15	15		
	t_{CLRWL}			-15	15		

Downloaded from Arrow.com.

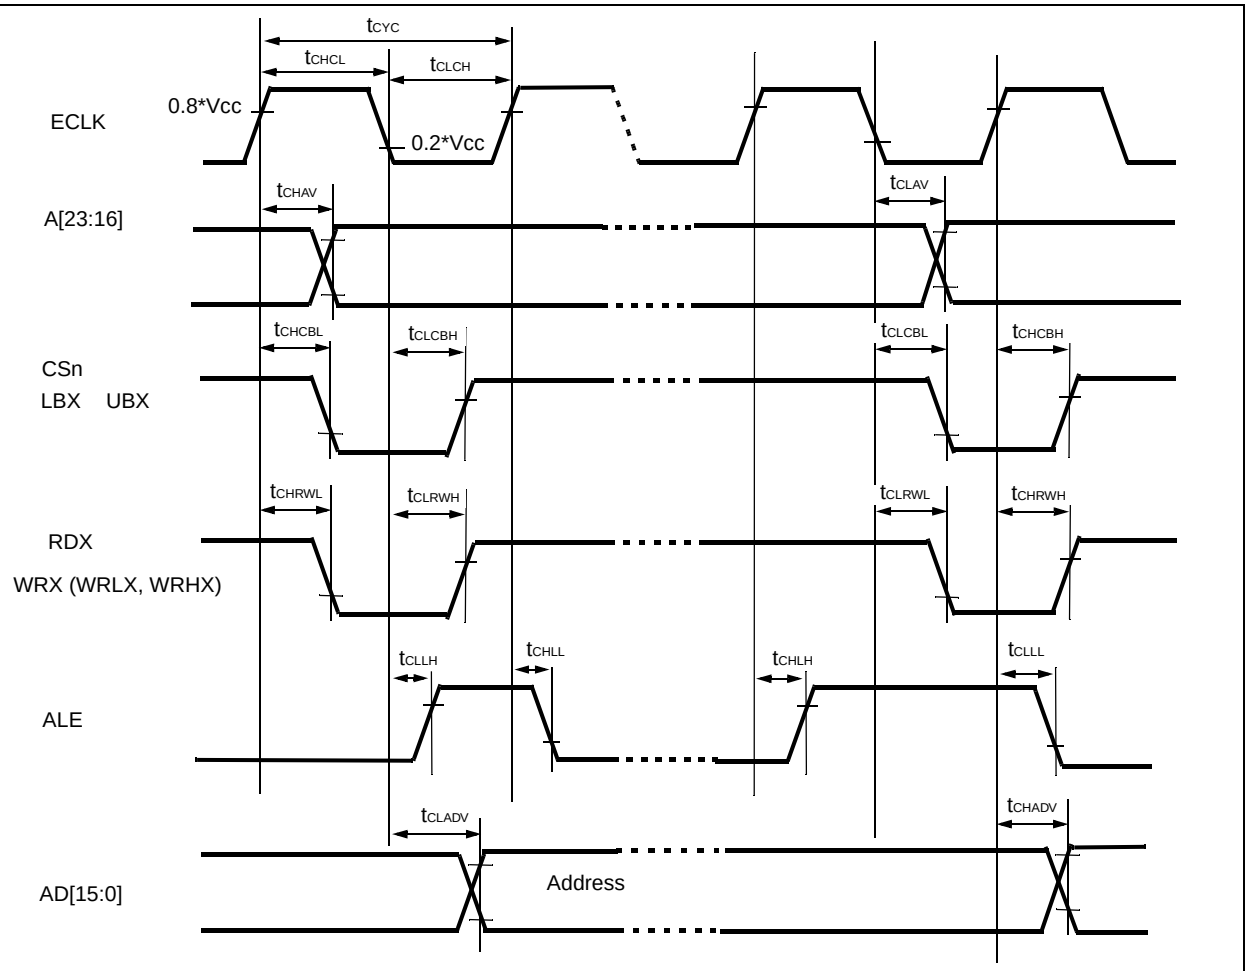

Refer to the Hardware Manual for detailed Timing Charts

Downloaded from Arrow.com.

Bus Timing (Read)

(T_A = –40 °C to +125 °C, V_{CC} = 5.0 V ± 10%, V_{SS} = 0.0 V, IO_{drive} = 5mA, C_L = 50pF)

Parameter	Sym-bol	Pin	Conditions	Value		Unit	Remarks
				Min	Max		
ALE pulse width	t_{LHLL}	ALE	EACL:STS=0 and EACL:ACE=0	$t_{CYC}/2 - 5$	—	ns	
			EACL:STS=1	$t_{CYC} - 5$	—		
			EACL:STS=0 and EACL:ACE=1	$3t_{CYC}/2 - 5$	—		
Valid address ⇒ ALE ↓ time	t_{AVLL}	ALE, A[23:16],	EACL:STS=0 and EACL:ACE=0	$t_{CYC} - 15$	—	ns	
			EACL:STS=1 and EACL:ACE=0	$3t_{CYC}/2 - 15$	—		
			EACL:STS=0 and EACL:ACE=1	$2t_{CYC} - 15$	—		
			EACL:STS=1 and EACL:ACE=1	$5t_{CYC}/2 - 15$	—		
	t_{ADVLL}	ALE,AD[15:0]	EACL:STS=0 and EACL:ACE=0	$t_{CYC}/2 - 15$	—	ns	
			EACL:STS=1 and EACL:ACE=0	$t_{CYC} - 15$	—		
			EACL:STS=0 and EACL:ACE=1	$3t_{CYC}/2 - 15$	—		
			EACL:STS=1 and EACL:ACE=1	$2t_{CYC} - 15$	—		
ALE ↓ ⇒ Address valid time	t_{LLAX}	ALE, AD[15:0]	EACL:STS=0	$t_{CYC}/2 - 15$	—	ns	
			EACL:STS=1	-15	—		
Valid address ⇒ RDX ↓ time	t_{AVRL}	RDX, A[23:16]	EACL:ACE=0	$3t_{CYC}/2 - 15$	—	ns	
			EACL:ACE=1	$5t_{CYC}/2 - 15$	—		
	t_{ADVRL}	RDX, AD[15:0]	EACL:ACE=0	$t_{CYC} - 15$	—	ns	
			EACL:ACE=1	$2t_{CYC} - 15$	—		
Valid address ⇒ Valid data input	t_{AVDV}	A[23:16], AD[15:0]	EACL:ACE=0	—	$3t_{CYC} - 55$	ns	w/o cycle extension
			EACL:ACE=1	—	$4t_{CYC} - 55$		
	t_{ADVDV}	AD[15:0]	EACL:ACE=0	—	$5t_{CYC}/2 - 55$	ns	w/o cycle extension
			EACL:ACE=1	—	$7t_{CYC}/2 - 55$		
RDX pulse width	t_{RLRH}	RDX	—	$3\ t_{CYC}/2 - 5$	—	ns	w/o cycle extension
RDX ↓ ⇒ Valid data input	t_{RLDV}	RDX, AD[15:0]	—	—	$3\ t_{CYC}/2 - 50$	ns	w/o cycle extension
RDX ↑ ⇒ Data hold time	t_{RHDX}	RDX, AD[15:0]	—	0	—	ns	

Downloaded from Arrow.com.

(T_A = –40 °C to +125 °C, V_{CC} = 5.0 V ± 10%, V_{SS} = 0.0 V, IO_{drive} = 5mA, C_L = 50pF)

Parameter	Sym-bol	Pin	Conditions	Value		Unit	Remarks
				Min	Max		
Address valid ⇒ Data hold time	t_{AXDX}	A[23:16], AD[15:0]	—	0	—	ns	
RDX ↑ ⇒ ALE ↑ time	t_{RHLH}	RDX, ALE	EACL:STS=1 and EACL:ACE=1	$3t_{CYC}/2 - 10$	—	ns	
			other ECL:STS, EACL:ACE setting	$t_{CYC}/2 - 10$	—		
Valid address ⇒ ECLK ↑ time	t_{AVCH}	A[23:16], ECLK	—	$t_{CYC} - 15$	—	ns	
	t_{ADVCH}	AD[15:0], ECLK		$t_{CYC}/2 - 15$	—		
RDX ↓ ⇒ ECLK ↑ time	t_{RLCH}	RDX, ECLK	—	$t_{CYC}/2 - 10$	—	ns	
ALE ↓ ⇒ RDX ↓ time	t_{LLRL}	ALE, RDX	EACL:STS=0	$t_{CYC}/2 - 10$	—	ns	
			EACL:STS=1	– 10	—		
ECLK↑ ⇒ Valid data input	t_{CHDV}	AD[15:0], ECLK	—	—	$t_{CYC} - 50$	ns	

(T_A = –40 °C to +125 °C, V_{CC} = 3.0 to 4.5V, V_{SS} = 0.0 V, IO_{drive} = 5mA, C_L = 50pF)


Parameter	Sym-bol	Pin	Conditions	Value		Unit	Remarks
				Min	Max		
ALE pulse width	t_{LHLL}	ALE	EACL:STS=0 and EACL:ACE=0	$t_{CYC}/2 - 8$	—	ns	
			EACL:STS=1	$t_{CYC} - 8$	—		
			EACL:STS=0 and EACL:ACE=1	$3t_{CYC}/2 - 8$	—		
Valid address ⇒ ALE ↓ time	t_{AVLL}	ALE, A[23:16],	EACL:STS=0 and EACL:ACE=0	$t_{CYC} - 20$	—	ns	
			EACL:STS=1 and EACL:ACE=0	$3t_{CYC}/2 - 20$	—		
			EACL:STS=0 and EACL:ACE=1	$2t_{CYC} - 20$	—		
			EACL:STS=1 and EACL:ACE=1	$5t_{CYC}/2 - 20$	—		
	t_{ADVLL}	ALE, AD[15:0]	EACL:STS=0 and EACL:ACE=0	$t_{CYC}/2 - 20$	—	ns	
			EACL:STS=1 and EACL:ACE=0	$t_{CYC} - 20$	—		
			EACL:STS=0 and EACL:ACE=1	$3t_{CYC}/2 - 20$	—		
			EACL:STS=1 and EACL:ACE=1	$2t_{CYC} - 20$	—		
ALE ↓ ⇒ Address valid time	t_{LLAX}	ALE, AD[15:0]	EACL:STS=0	$t_{CYC}/2 - 20$	—	ns	
			EACL:STS=1	-20	—		

Downloaded from Arrow.com.

(T_A = –40 °C to +125 °C, V_{CC} = 3.0 to 4.5V, V_{SS} = 0.0 V, IO_{drive} = 5mA, C_L = 50pF)

Parameter	Sym-bol	Pin	Conditions	Value		Unit	Remarks
				Min	Max		
Valid address ⇒ RDX ↓ time	t_{AVRL}	RDX, A[23:16]	EACL:ACE=0	$3t_{CYC}/2 - 20$	—	ns	
			EACL:ACE=1	$5t_{CYC}/2 - 20$	—		
	t_{ADVRL}	RDX, AD[15:0]	EACL:ACE=0	$t_{CYC} - 20$	—	ns	
			EACL:ACE=1	$2t_{CYC} - 20$	—		
Valid address ⇒ Valid data input	t_{AVDV}	A[23:16], AD[15:0]	EACL:ACE=0	—	$3t_{CYC} - 60$	ns	w/o cycle extension
			EACL:ACE=1	—	$4t_{CYC} - 60$		
	t_{ADVDV}	AD[15:0]	EACL:ACE=0	—	$5t_{CYC}/2 - 60$	ns	w/o cycle extension
			EACL:ACE=1	—	$7t_{CYC}/2 - 60$		
RDX pulse width	t_{RLRH}	RDX	—	$3t_{CYC}/2 - 8$	—	ns	w/o cycle extension
RDX ↓ ⇒ Valid data input	t_{RLDV}	RDX, AD[15:0]	—	—	$3t_{CYC}/2 - 55$	ns	w/o cycle extension
RDX ↑ ⇒ Data hold time	t_{RHDX}	RDX, AD[15:0]	—	0	—	ns	
Address valid ⇒ Data hold time	t_{AXDX}	A[23:16]	—	0	—	ns	
RDX ↑ ⇒ ALE ↑ time	t_{RHLH}	RDX, ALE	EACL:STS=1 and EACL:ACE=1	$3t_{CYC}/2 - 15$	—	ns	
			other ECL:STS, EACL:ACE setting	$t_{CYC}/2 - 15$	—		
Valid address ⇒ ECLK ↑ time	t_{AVCH}	A[23:16], ECLK	—	$t_{CYC} - 20$	—	ns	
	t_{ADVCH}	AD[15:0], ECLK		$t_{CYC}/2 - 20$	—		
RDX ↓ ⇒ ECLK ↑ time	t_{RLCH}	RDX, ECLK	—	$t_{CYC}/2 - 15$	—	ns	
ALE ↓ ⇒ RDX ↓ time	t_{LLRL}	ALE, RDX	EACL:STS=0	$t_{CYC}/2 - 15$	—	ns	
			EACL:STS=1	– 15	—		
ECLK↑ ⇒ Valid data input	t_{CHDV}	AD[15:0], ECLK	—	—	$t_{CYC} - 55$	ns	

Downloaded from Arrow.com.

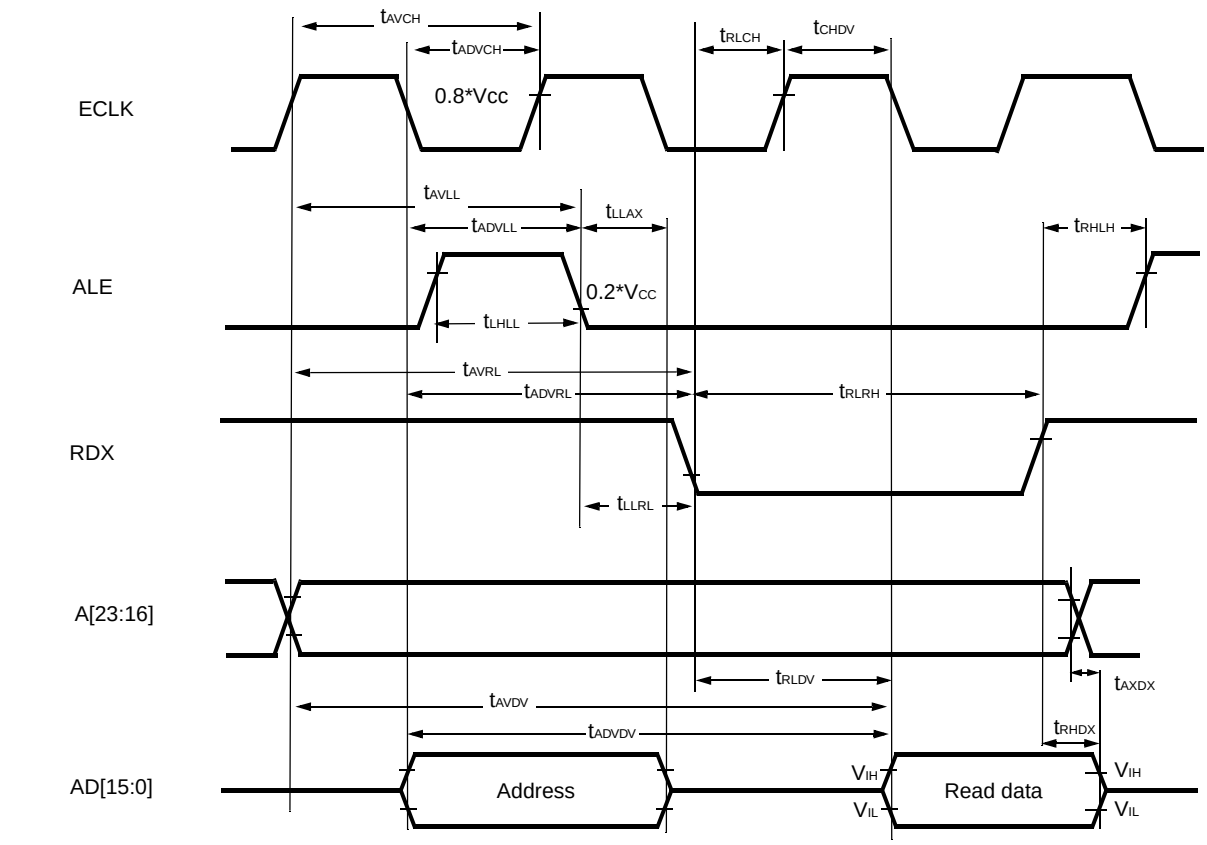

Refer to the Hardware Manual for detailed Timing Charts

Bus Timing (Write)

(T_A = –40 °C to +125 °C, V_{CC} = 5.0 V ± 10%, V_{SS} = 0.0 V, IO_{drive} = 5mA, C_L = 50pF)

Parameter	Symbol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
Valid address ⇒ WRX ↓ time	t_{AVWL}	WRX, WRLX, WRHX, A[23:16]	EACL:ACE=0	$3t_{CYC}/2$ – 15	—	ns	
			EACL:ACE=1	$5t_{CYC}/2$ – 15	—		
	t_{ADVWL}	WRX, WRLX, WRHX, AD[15:0]	EACL:ACE=0	t_{CYC} – 15	—	ns	
			EACL:ACE=1	$2t_{CYC}$ – 15	—		
WRX pulse width	t_{WLWH}	WRX, WRXL, WRHX	—	t_{CYC} – 5	—	ns	w/o cycle extension
Valid data output ⇒ WRX ↑ time	t_{DVWH}	WRX, WRLX, WRHX, AD[15:0]	—	t_{CYC} – 20	—	ns	w/o cycle extension

Downloaded from Arrow.com.

(T_A = –40 °C to +125 °C, V_{CC} = 5.0 V ± 10%, V_{SS} = 0.0 V, IO_{drive} = 5mA, C_L = 50pF)

Parameter	Symbol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
WRX ↑ ⇒ Data hold time	t_{WHDX}	WRX, WRLX, WRHX, AD[15:0]	—	$t_{CYC}/2 - 15$	—	ns	
WRX ↑ ⇒ Address valid time	t_{WHAX}	WRX, WRLX, WRHX, A[23:16]	—	$t_{CYC}/2 - 15$	—	ns	
WRX ↑ ⇒ ALE ↑ time	t_{WHLH}	WRX, WRLX, WRHX, ALE	EBM:ACE=1 and EACL:STS=1	$2t_{CYC} - 10$	—	ns	
			other EBM:ACE and EACL:STS setting	$t_{CYC} - 10$	—		
WRX ↓ ⇒ ECLK ↑ time	t_{WLCH}	WRX, WRLX, WRHX, ECLK	—	$t_{CYC}/2 - 10$	—	ns	
CSn ⇒ WRX time	t_{CSLWL}	WRX, WRLX, WRHX, CSn	EACL:ACE=0	—	$3t_{CYC}/2 - 15$	ns	
			EACL:ACE=1	—	$5t_{CYC}/2 - 15$		
WRX ⇒ CSn time	t_{WHCSH}	WRX, WRLX, WRHX, CSn	—	$t_{CYC}/2 - 15$	—	ns	


(T_A = –40 °C to +125 °C, V_{CC} = 3.0 to 4.5V, V_{SS} = 0.0 V, IO_{drive} = 5mA, C_L = 50pF)

Parameter	Symbol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
Valid address ⇒ WRX ↓ time	t_{AVWL}	WRX, WRLX, WRHX, A[23:16]	EACL:ACE=0	$3t_{CYC}/2 - 20$	—	ns	
			EACL:ACE=1	$5t_{CYC}/2 - 20$	—		
	t_{ADVWL}	WRX, WRLX, WRHX, AD[15:0]	EACL:ACE=0	$t_{CYC} - 20$	—	ns	
			EACL:ACE=1	$2t_{CYC} - 20$	—		
WRX pulse width	t_{WLWH}	WRX, WRXL, WRHX	—	$t_{CYC} - 8$	—	ns	w/o cycle extension
Valid data output ⇒ WRX ↑ time	t_{DVWH}	WRX, WRLX, WRHX, AD[15:0]	—	$t_{CYC} - 25$	—	ns	w/o cycle extension
WRX ↑ ⇒ Data hold time	t_{WHDX}	WRX, WRLX, WRHX, AD[15:0]	—	$t_{CYC}/2 - 20$	—	ns	
WRX ↑ ⇒ Address valid time	t_{WHAX}	WRX, WRLX, WRHX, A[23:16]	—	$t_{CYC}/2 - 20$	—	ns	

Downloaded from Arrow.com.

(T_A = –40 °C to +125 °C, V_{CC} = 3.0 to 4.5V, V_{SS} = 0.0 V, IO_{drive} = 5mA, C_L = 50pF)

Parameter	Symbol	Pin	Condition	Value		Unit	Remarks
				Min	Max		
WRX ↑ ⇒ ALE ↑ time	t_{WHLH}	WRX, WRLX, WRHX, ALE	EBM:ACE=1 and EACL:STS=1	$2t_{CYC}$ – 15	—	ns	
			other EBM:ACE and EACL:STS setting	t_{CYC} – 15	—		
WRX ↓ ⇒ ECLK ↑ time	t_{WLCH}	WRX, WRLX, WRHX, ECLK	—	$t_{CYC}/2$ – 15	—	ns	
CSn ⇒ WRX time	t_{CSLWL}	WRX, WRLX, WRHX, CSn	EACL:ACE=0	—	$3t_{CYC}/2$ – 20	ns	
			EACL:ACE=1	—	$5t_{CYC}/2$ – 20		
WRX ⇒ CSn time	t_{WHCSH}	WRX, WRLX, WRHX, CSn	—	$t_{CYC}/2$ – 20	—	ns	

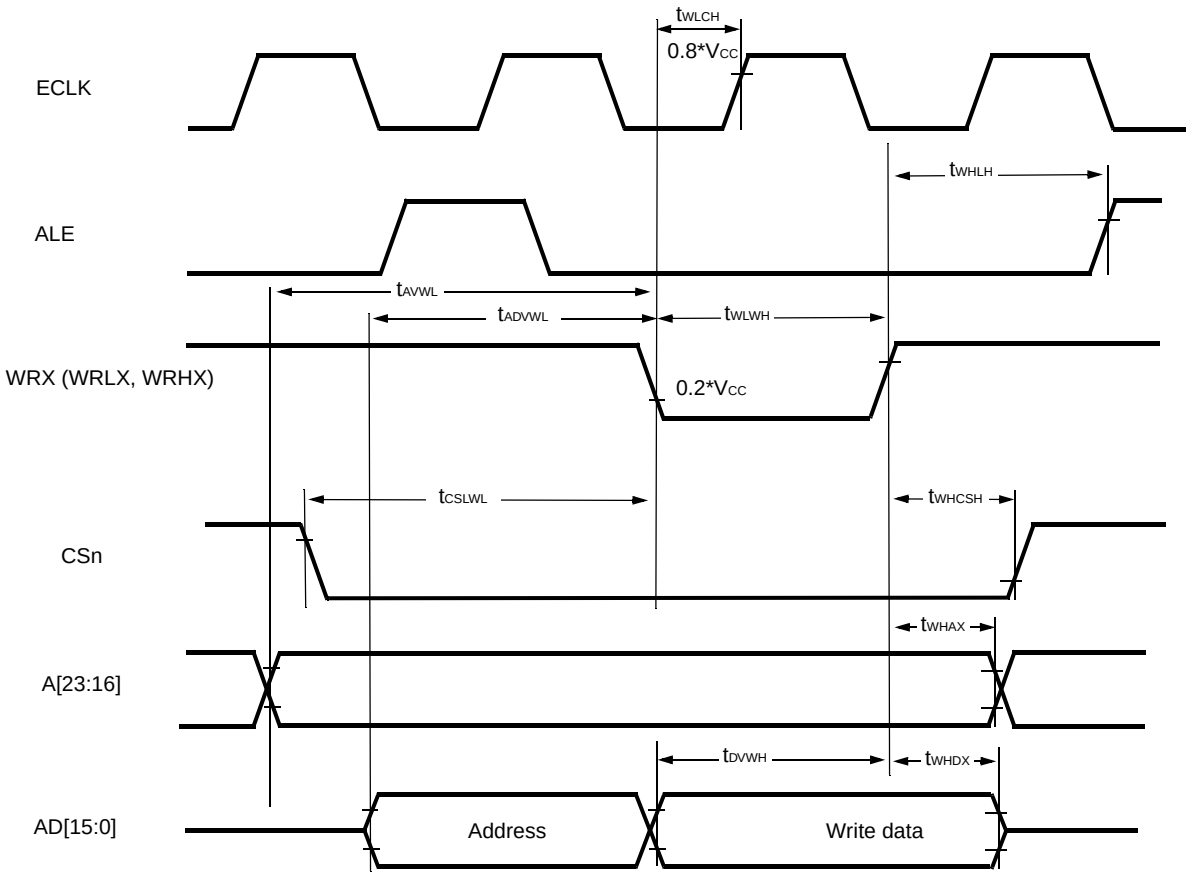

Refer to the Hardware Manual for detailed Timing Charts

Downloaded from Arrow.com.

Ready Input Timing


(T_A = –40 °C to +125 °C, V_{CC} = 5.0 V ± 10%, V_{SS} = 0.0 V, IO_{drive} = 5mA, C_L = 50pF)

Parameter	Symbol	Pin	Test Condition	Rated Value		Units	Remarks
				Min	Max		
RDY setup time	t_{RYHS}	RDY	—	35	—	ns	
RDY hold time	t_{RYHH}	RDY		0	—	ns	

(T_A = –40 °C to +125 °C, V_{CC} = 3.0 to 4.5V, V_{SS} = 0.0 V, IO_{drive} = 5mA, C_L = 50pF)

Parameter	Symbol	Pin	Test Condition	Rated Value		Units	Remarks
				Min	Max		
RDY setup time	t_{RYHS}	RDY	—	45	—	ns	
RDY hold time	t_{RYHH}	RDY		0	—	ns	

Note : If the RDY setup time is insufficient, use the auto-ready function.

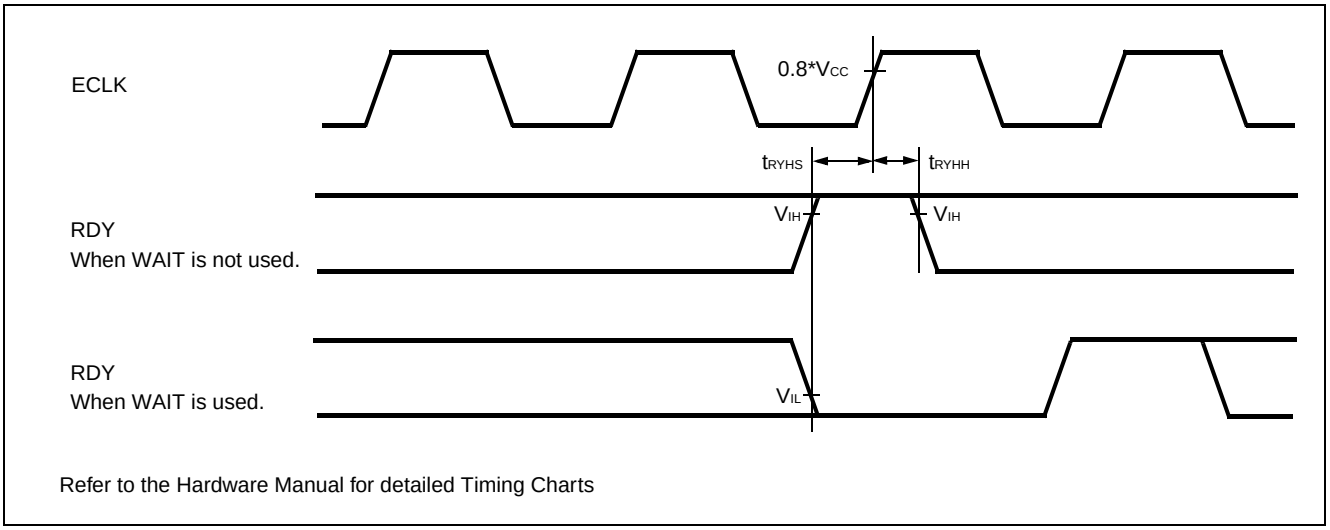

Refer to the Hardware Manual for detailed Timing Charts

Hold Timing


(T_A = –40 °C to +125 °C, V_{CC} = 5.0 V ± 10%, V_{SS} = 0.0 V, IO_{drive} = 5mA, C_L = 50pF)

Parameter	Symbol	Pin	Condition	Value		Units	Remarks
				Min	Max		
Pin floating ⇒ HAKX ↓ time	t_{XHAL}	HAKX	—	t_{CYC} – 20	t_{CYC} + 20	ns	
HAKX ↑ time ⇒ Pin valid time	t_{HAHV}	HAKX		t_{CYC} – 20	t_{CYC} + 20	ns	

(T_A = –40 °C to +125 °C, V_{CC} = 3.0 to 4.5V, V_{SS} = 0.0 V, IO_{drive} = 5mA, C_L = 50pF)

Parameter	Symbol	Pin	Condition	Value		Units	Remarks
				Min	Max		
Pin floating ⇒ HAKX ↓ time	t_{XHAL}	HAKX	—	t_{CYC} – 25	t_{CYC} + 25	ns	
HAKX ↑ time ⇒ Pin valid time	t_{HAHV}	HAKX		t_{CYC} – 25	t_{CYC} + 25	ns	

Downloaded from Arrow.com.

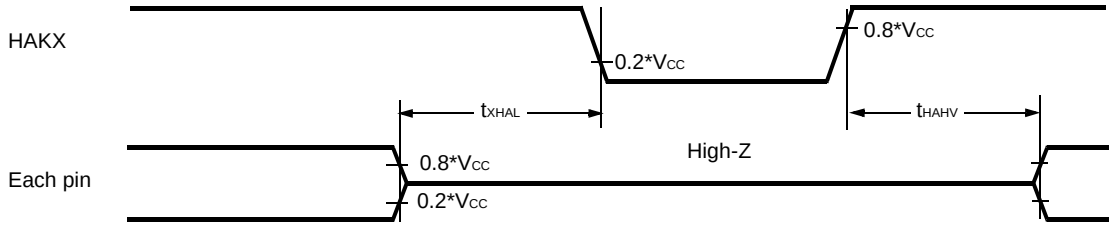

Refer to the Hardware Manual for detailed Timing Charts

Downloaded from Arrow.com.

USART timing

WARNING: The values given below are for an I/O driving strength IO_{drive} = 5mA. If IO_{drive} is 2mA, all the maximum output timing described in the different tables must then be increased by 10ns.

(T_A = -40°C to 125°C, V_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V, IO_{drive} = 5mA, C_L = 50pF)

Parameter	Symbol	Pin	Condition	V_{CC} = AV_{CC}= 4.5V to 5.5V		V_{CC} = AV_{CC}= 3.0V to 4.5V		Unit
				Min	Max	Min	Max	
Serial clock cycle time	t_{SCYCI}	SCKn	Internal Shift Clock Mode	4 t_{CLKP1}	—	4 t_{CLKP1}	—	ns
SCK ↓ → SOT delay time	t_{SLOVI}	SCKn, SOTn		-20	+20	-30	+30	ns
SOT → SCK ↑ delay time	t_{OVSHI}	SCKn, SOTn		N*t_{CLKP1} - 20 *1	—	N*t_{CLKP1} - 30 *1	—	ns
Valid SIN → SCK ↑	t_{IVSHI}	SCKn, SINn		t_{CLKP1} + 45	—	t_{CLKP1} + 55	—	ns
SCK ↑ → Valid SIN hold time	t_{SHIXI}	SCKn, SINn		0	—	0	—	ns
Serial clock “L” pulse width	t_{SLSHE}	SCKn	External Shift Clock Mode	t_{CLKP1} + 10	—	t_{CLKP1} + 10	—	ns
Serial clock “H” pulse width	t_{SHSLE}	SCKn		t_{CLKP1} + 10	—	t_{CLKP1} + 10	—	ns
SCK ↓ → SOT delay time	t_{SLOVE}	SCKn, SOTn		—	2 t_{CLKP1} + 45	—	2 t_{CLKP1} + 55	ns
Valid SIN → SCK ↑	t_{IVSHE}	SCKn, SINn		t_{CLKP1}/2 + 10	—	t_{CLKP1}/2 + 10	—	ns
SCK ↑ → Valid SIN hold time	t_{SHIXE}	SCKn, SINn		t_{CLKP1} + 10	—	t_{CLKP1} + 10	—	ns
SCK fall time	t_{FE}	SCKn		—	20	—	20	ns
SCK rise time	t_{RE}	SCKn		—	20	—	20	ns


Notes:
- AC characteristic in CLK synchronized mode.
- C_L is the load capacity value of pins when testing.
- Depending on the used machine clock frequency, the maximum possible baud rate can be limited by some parameters. These parameters are shown in “MB96300 Super series HARDWARE MANUAL”.
- t_{CLKP1} is the cycle time of the peripheral clock 1 (CLKP1), Unit : ns

*1: Parameter N depends on t_{SCYCI} and can be calculated as follows:
- if t_{SCYCI} = 2*k*t_{CLKP1}, then N = k, where k is an integer > 2
- if t_{SCYCI} = (2*k+1)*t_{CLKP1}, then N = k+1, where k is an integer > 1


Examples:

t_{SCYCI}	N
4*t_{CLKP1}	2
5*t_{CLKP1}, 6*t_{CLKP1}	3
7*t_{CLKP1}, 8*t_{CLKP1}	4
...	...

Downloaded from Arrow.com.

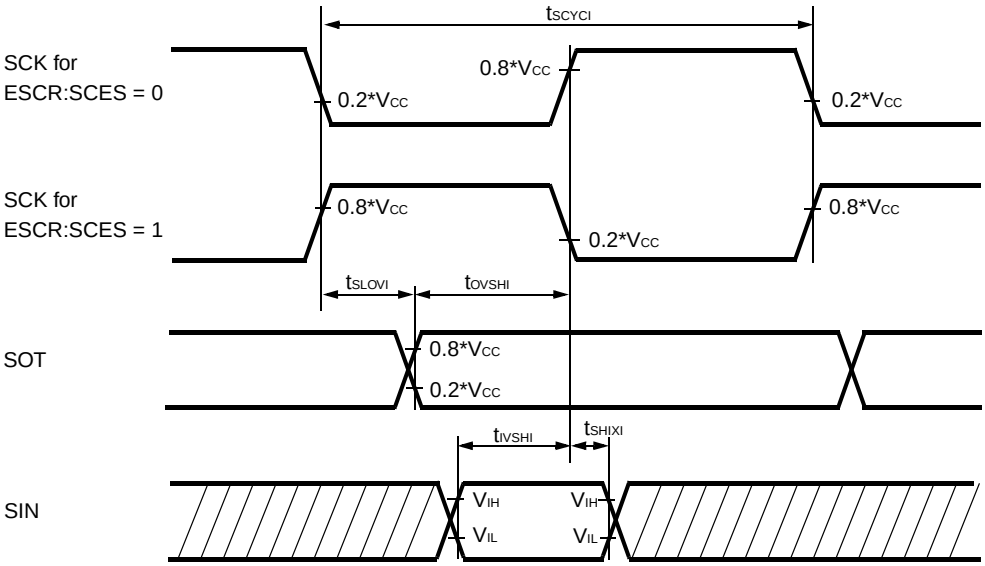

Internal Shift Clock Mode

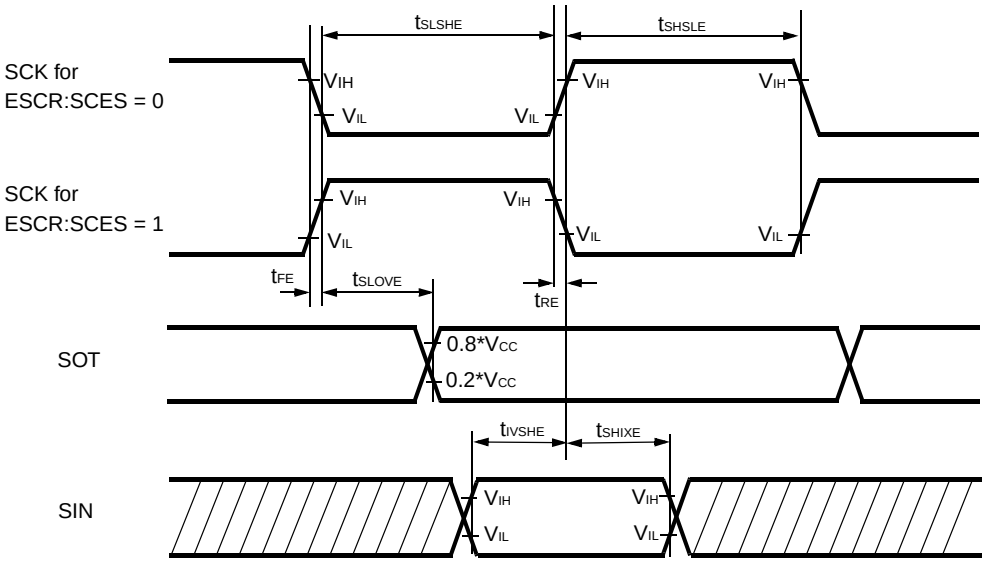

External Shift Clock Mode

Downloaded from Arrow.com.

I²C Timing

(T_A = -40°C to 125°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} =0V)


Parameter	Symbol	Condition	Standard-mode		Fast-mode*4		Unit
			Min	Max	Min	Max	
SCL clock frequency	f_{SCL}	R = 1.7 kΩ, C = 50 pF*1	0	100	0	400	kHz
Hold time (repeated) START condition SDA↓→SCL↓	t_{HDSTA}		4.0	—	0.6	—	µs
"L" width of the SCL clock	t_{LOW}		4.7	—	1.3	—	µs
"H" width of the SCL clock	t_{HIGH}		4.0	—	0.6	—	µs
Set-up time for a repeated START condition SCL↑→SDA↓	t_{SUSTA}		4.7	—	0.6	—	µs
Data hold time SCL↓→SDA↓↑	t_{HDDAT}		0	3.45*2	0	0.9*3	µs
Data set-up time SDA↓↑→SCL↑	t_{SUDAT}		250	—	100	—	ns
Set-up time for STOP condition SCL↑→SDA↑	t_{SUSTO}		4.0	—	0.6	—	µs
Bus free time between a STOP and START condition	t_{BUS}		4.7	—	1.3	—	µs

*1 : R,C : Pull-up resistor and load capacitor of the SCL and SDA lines.

*2 : The maximum t_{HDDAT} have only to be met if the device does not stretch the "L" width (t_{LOW}) of the SCL signal.

*3 : A Fast-mode I²C-bus device can be used in a Standard-mode I²C-bus system, but the requirement $t_{SUDAT} \geq 250$ ns must then be met.

*4 : For use at over 100 kHz, set the peripheral clock 1 to at least 6 MHz.

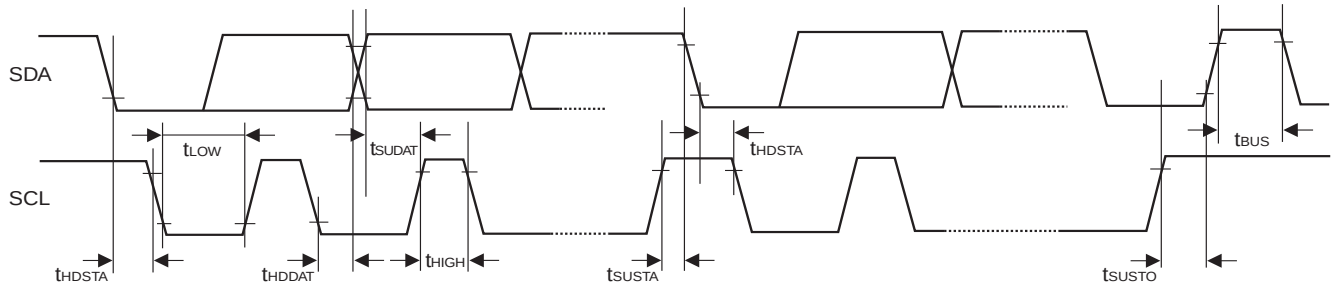

Downloaded from Arrow.com.

5. Analog Digital Converter

(T_A = -40 °C to +125 °C, 3.0 V ≤ AVRH - AVRL, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)

Parameter	Symbol	Pin	Value			Unit	Remarks
			Min	Typ	Max		
Resolution	-	-	-	-	10	bit	
Total error	-	-	-3	-	+3	LSB	
Nonlinearity error	-	-	-2.5	-	+2.5	LSB	
Differential nonlinearity error	-	-	-1.9	-	+1.9	LSB	
Zero reading voltage	V_{OT}	ANn	AVRL - 1.5 LSB	AVRL+ 0.5 LSB	AVRL + 2.5 LSB	V	
Full scale reading voltage	V_{FST}	ANn	AVRH - 3.5 LSB	AVRH - 1.5 LSB	AVRH + 0.5 LSB	V	
Compare time	-	-	1.0	-	16,500	µs	4.5V ≤ AV_{CC} ≤ 5.5V
			2.0	-	-	µs	3.0V ≤ AV_{CC} < 4.5V
Sampling time	-	-	0.5	-	-	µs	4.5V ≤ AV_{CC} ≤ 5.5V
			1.2	-	-	µs	3.0V ≤ AV_{CC} < 4.5V
Analog port input current	I_{AIN}	ANn	-3	-	+3	µA	AV_{SS}, AVRL < V_I < AV_{CC}, AVRH
Analog port input current	I_{AIN}	ANn	-1	-	+1	µA	T_A = 25 °C, AV_{SS}, AVRL < V_I < AV_{CC}, AVRH
			-3	-	+3	µA	T_A = 125 °C, AV_{SS}, AVRL < V_I < AV_{CC}, AVRH
Analog input voltage range	V_{AIN}	ANn	AVRL	-	AVRH	V	
Reference voltage range	AVRH	AVRH/ AVRH2	0.75 AVcc	-	AVcc	V	
	AVRL	AVRL	AV_{SS}	-	0.25 AV_{CC}	V	
Power supply current	I_A	AVcc	-	2.5	5	mA	A/D Converter active
	I_{AH}	AVcc	-	-	5	µA	A/D Converter not operated
Reference voltage current	I_R	AVRH/ AVRL	-	0.7	1	mA	A/D Converter active
	I_{RH}	AVRH/ AVRL	-	-	5	µA	A/D Converter not operated
Offset between input channels	-	ANn	-	-	4	LSB	

Note: The accuracy gets worse as |AVRH - AVRL| becomes smaller.

Downloaded from Arrow.com.

Definition of A/D Converter Terms

Resolution: Analog variation that is recognized by an A/D converter.

Total error: Difference between the actual value and the ideal value. The total error includes zero transition error, full-scale transition error and nonlinearity error.


Nonlinearity error: Deviation between a line across zero-transition line (“00 0000 0000” <--> “00 0000 0001”) and full-scale transition line (“11 1111 1110” <--> “11 1111 1111”) and actual conversion characteristics.

Differential nonlinearity error: Deviation of input voltage, which is required for changing output code by 1 LSB, from an ideal value.

Zero reading voltage: Input voltage which results in the minimum conversion value.

Full scale reading voltage: Input voltage which results in the maximum conversion value.

Total error

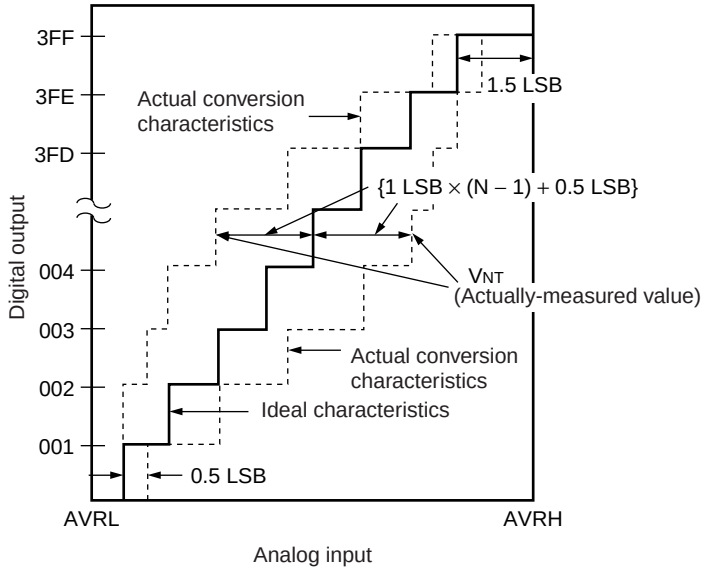

$$\text{Total error of digital output “N”} = \frac{V_{NT} - \{1\ \text{LSB} \times (N - 1) + 0.5\ \text{LSB}\}}{1\ \text{LSB}}\ [\text{LSB}]$$

$$1\ \text{LSB} = (\text{Ideal value})\ \frac{\text{AVRH} - \text{AVRL}}{1024}\ [\text{V}]$$

N: A/D converter digital output value


V_{OT} (Ideal value) = AVRL + 0.5 LSB [V]

V_{FST} (Ideal value) = AVRH – 1.5 LSB [V]


V_{NT} : A voltage at which digital output transitions from (N – 1) to N.

Downloaded from Arrow.com.

Nonlinearity error

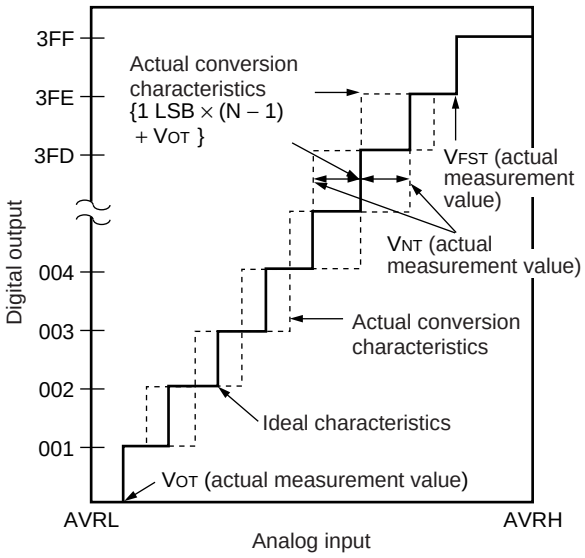

Differential nonlinearity error

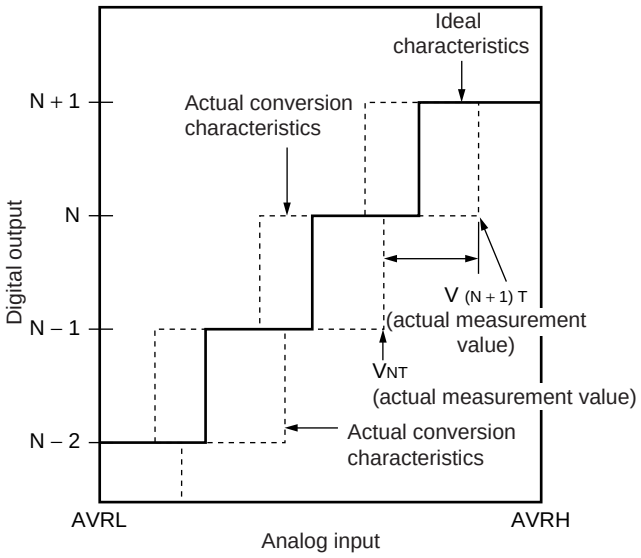

$$\text{Nonlinearity error of digital output N} = \frac{V_{NT} - \{1\ \text{LSB} \times (N - 1) + V_{OT}\}}{1\ \text{LSB}}\ [\text{LSB}]$$

$$\text{Differential nonlinearity error of digital output N} = \frac{V_{(N+1)T} - V_{NT}}{1\ \text{LSB}} - 1\text{LSB}\ [\text{LSB}]$$

$$1\ \text{LSB} = \frac{V_{FST} - V_{OT}}{1022}\ [\text{V}]$$

N : A/D converter digital output value

V_{OT} : Voltage at which digital output transits from “000_H” to “001_H.”

V_{FST} : Voltage at which digital output transits from “$3FE_H$” to “$\#FF_H$.”


Downloaded from Arrow.com.

Notes on A/D Converter Section

- About the external impedance of the analog input and the sampling time of the A/D converter (with sample and hold circuit):

If the external impedance is too high to keep sufficient sampling time, the analog voltage charged to the internal sample and hold capacitor is insufficient, adversely affecting A/D conversion precision.

- analog input circuit model:

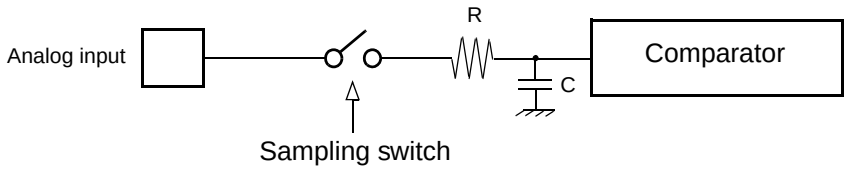

Reference value:

- C = 8.5 pF (Max)

To satisfy the A/D conversion precision standard, the relationship between the external impedance and minimum sampling time must be considered and then either the resistor value and operating frequency must be adjusted or the external impedance must be decreased so that the sampling time (T_{samp}) is longer than the minimum value. Usually, this value is set to 7τ, where τ = RC. If the external input resistance (R_{ext}) connected to the analog input is included, the sampling time is expressed as follows:

T_{samp} [min] = $7 \times (R_{ext} + 2.6k\Omega) \times C$ for $4.5 \leq AV_{cc} \leq 5.5$

T_{samp} [min] = $7 \times (R_{ext} + 12.1k\Omega) \times C$ for $3.0 \leq AV_{cc} \leq 4.5$

If the sampling time cannot be sufficient, connect a capacitor of about 0.1 µF to the analog input pin.

- About the error

The accuracy gets worse as |AVRH - AVRL| becomes smaller.


Downloaded from Arrow.com.

6. Alarm Comparator

(T_A = -40 °C to +125 °C, V_{CC} = AV_{CC} = 3.0V - 5.5V, V_{SS} = AV_{SS} = 0V)

Parameter	Symbol	Pin	Value			Unit	Remarks
			Min	Typ	Max		
Power supply current	I_{A5ALMF}	AV_{CC}	-	25	45	µA	Alarm comparator enabled in fast mode (one channel)
	I_{A5ALMS}		-	7	13	µA	Alarm comparator enabled in slow mode (one channel)
	I_{A5ALMH}		-	-	5	µA	Alarm comparator disabled
ALARM pin input current	I_{ALIN}	ALARM0, ALARM1	-1	-	+1	µA	T_A = 25 °C
			-3	-	+3	µA	T_A = 125 °C
ALARM pin input voltage range	V_{ALIN}		0	-	AV_{CC}	V	
External low threshold high->low transition	$V_{EVTL(H->L)}$		0.36 * AV_{CC} -0.25	0.36 * AV_{CC} -0.1	-	V	INTREF = 0
External low threshold low->high transition	$V_{EVTL(L->H)}$		-	0.36 * AV_{CC} +0.1	0.36 * AV_{CC} +0.25	V	
External high threshold high->low transition	$V_{EVTH(H->L)}$		0.78 * AV_{CC} -0.25	0.78 * AV_{CC} -0.1	-	V	
External high threshold low->high transition	$V_{EVTH(L->H)}$			0.78 * AV_{CC} +0.1	0.78 * AV_{CC} +0.25	V	
Internal low threshold high->low transition	$V_{IVTL(H->L)}$		0.9	1.1	-	V	INTREF = 1
Internal low threshold low->high transition	$V_{IVTL(L->H)}$		-	1.3	1.55	V	
Internal high threshold high->low transition	$V_{IVTH(H->L)}$		2.2	2.4	-	V	
Internal high threshold low->high transition	$V_{IVTH(L->H)}$		-	2.6	2.85	V	
Switching hysteresis	V_{HYS}		50	-	300	mV	
Comparison time	t_{COMPF}		-	0.1	1	µs	CMD = 1 (fast)
	t_{COMPS}		-	1	10	µs	CMD = 0 (slow)
Power-up stabilization time after enabling alarm comparator	t_{PD}		-	1	5	ms	Threshold levels specified above are not guaranteed within this time
Slow/Fast mode transition time	t_{CMD}		-	100	500	µs	

Downloaded from Arrow.com.

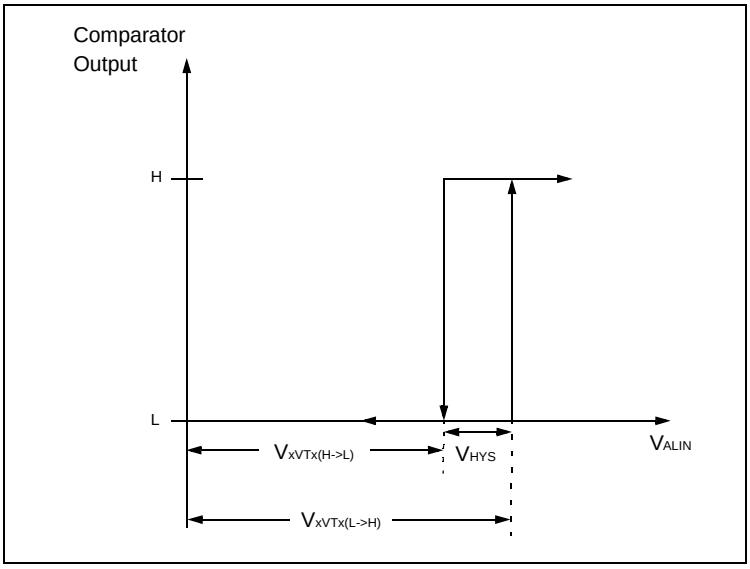

7. Low Voltage Detector characteristics

(T_A = -40 °C to +125 °C, V_{cc} = AV_{cc} = 3.0V - 5.5V, V_{ss} = AV_{ss} = 0V)

Parameter	Symbol	Value *1		Value *2		Unit	Remarks
		Min	Max	Min	Max		
Stabilization time	$T_{LVDSTAB}$	-	75	-	110	µs	After power-up or change of detection level
Level 0	V_{DL0}	2.7	2.9	2.65	2.95	V	CILCR:LVL[3:0]="0000"
Level 1	V_{DL1}	2.9	3.1	2.85	3.2	V	CILCR:LVL[3:0]="0001"
Level 2	V_{DL2}	3.1	3.3	3.05	3.4	V	CILCR:LVL[3:0]="0010"
Level 3	V_{DL3}	3.5	3.75	3.45	3.85	V	CILCR:LVL[3:0]="0011"
Level 4	V_{DL4}	3.6	3.85	3.55	3.95	V	CILCR:LVL[3:0]="0100"
Level 5	V_{DL5}	3.7	3.95	3.65	4.1	V	CILCR:LVL[3:0]="0101"
Level 6	V_{DL6}	3.8	4.05	3.75	4.2	V	CILCR:LVL[3:0]="0110"
Level 7	V_{DL7}	3.9	4.15	3.85	4.3	V	CILCR:LVL[3:0]="0111"
Level 8	V_{DL8}	4.0	4.25	3.95	4.4	V	CILCR:LVL[3:0]="1000"
Level 9	V_{DL9}	4.1	4.35	4.05	4.5	V	CILCR:LVL[3:0]="1001"
Level 10	V_{DL10}	not used		not used			
Level 11	V_{DL11}	not used		not used			
Level 12	V_{DL12}	not used		not used			
Level 13	V_{DL13}	not used		not used			
Level 14	V_{DL14}	not used		not used			
Level 15	V_{DL15}	not used		not used			

Downloaded from Arrow.com.

*1: valid for all devices except devices listed under “*2”

*2: valid for: MB96F345

CILCR:LVL[3:0] are the low voltage detector level select bits of the CILCR register.

Levels 10 to 15 are not used in this device.


For correct detection, the slope of the voltage level must satisfy $\left|\frac{dV}{dt}\right| \leq 0.004\frac{V}{\mu s}$.

Faster variations are regarded as noise and may not be detected.

The functional operation of the MCU is guaranteed down to the minimum low voltage detection level of Vcc = 2.7V. The electrical characteristics however are only valid in the specified range (usually down to 3.0V).

Low Voltage Detector Operation

In the following figure, the occurrence of a low voltage condition is illustrated. For a detailed description of the reset and startup behavior, please refer to the corresponding hardware manual chapter.

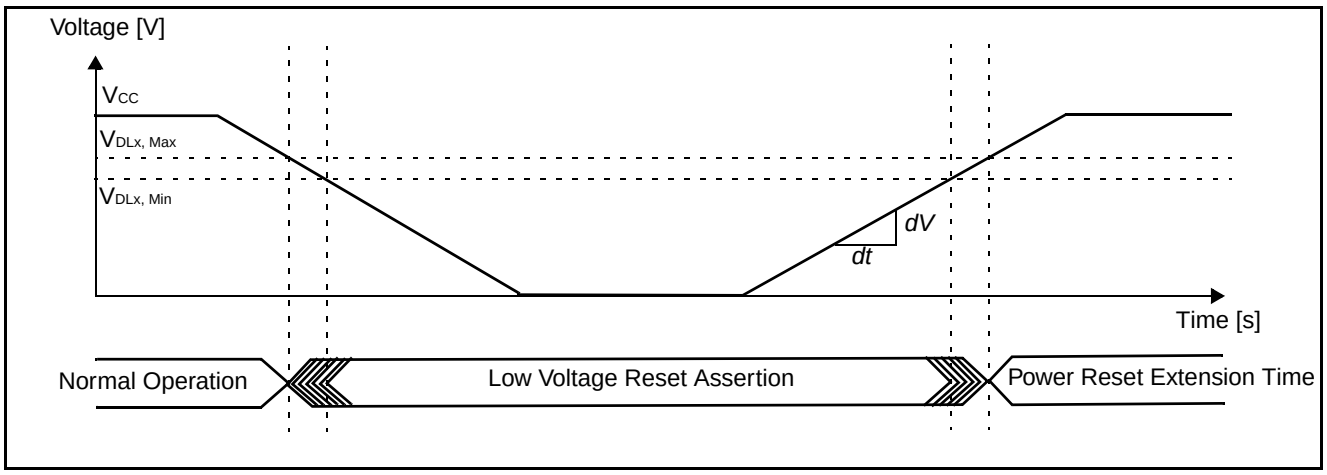

Downloaded from Arrow.com.

8. FLASH memory program/erase characteristics

(T_A = -40°C to 105°C, V_{CC} = AV_{CC} = 3.0V to 5.5V, V_{SS} = AV_{SS} = 0V)


Parameter	Value			Unit	Remarks
	Min	Typ	Max		
Sector erase time Program/Data Flash (Main Flash)	-	0.9	3.6	s	Without erasure pre-programming time
Sector erase time Data Flash	-	0.5	2	s	Without erasure pre-programming time
	-	0.8	3.6	s	Including erasure pre-programming time
Chip erase time Program/Data Flash (Main Flash)	-	n*0.9	n*3.6	s	Without erasure pre-programming time (n is the number of Flash sector of the device)
Chip erase time Data Flash	-	2.5	10	s	Without erasure pre-programming time
	-	3.7	16.4	s	Including erasure pre-programming time
Word (16-bit width) programming time Program/Data Flash (Main Flash)	-	23	370	us	Without overhead time for submitting write command
Byte (8-bit width) programming time Data Flash	-	15	100	us	Without overhead time for submitting write command
Program/Erase cycle	10 000	-	-	cycle	100 000 Program/Erase cycles are under evaluation by Fujitsu Microelectronics
Flash data retention time	20	-	-	year	*1


*1: This value was converted from the results of evaluating the reliability of the technology (using Arrhenius equation to convert high temperature measurements into normalized value at 85°C)

Downloaded from Arrow.com.

■ EXAMPLE CHARACTERISTICS


The diagrams below show the characteristics of one measured sample with typical process parameters.

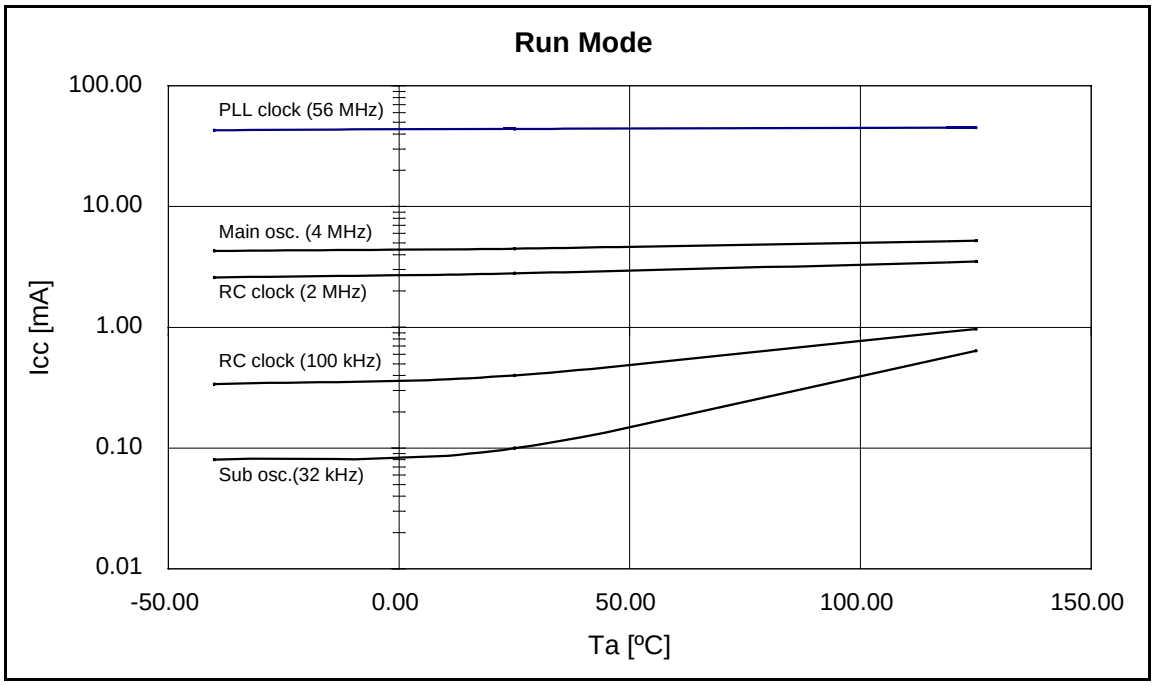


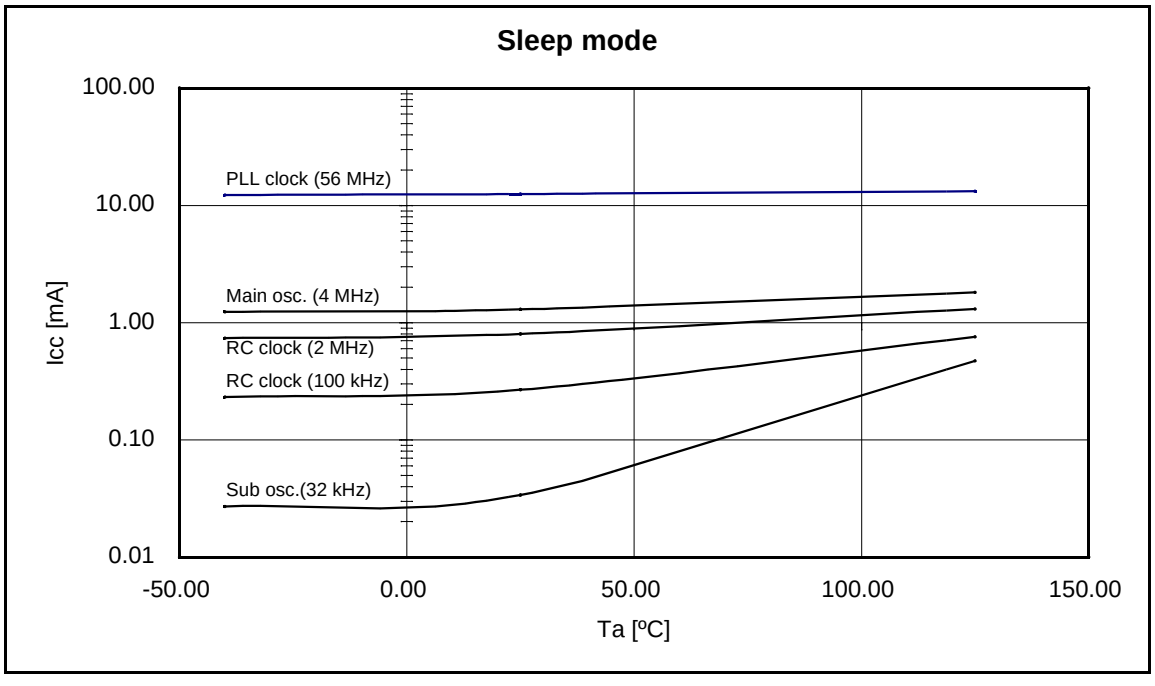

FUJITSU

Downloaded from Arrow.com.

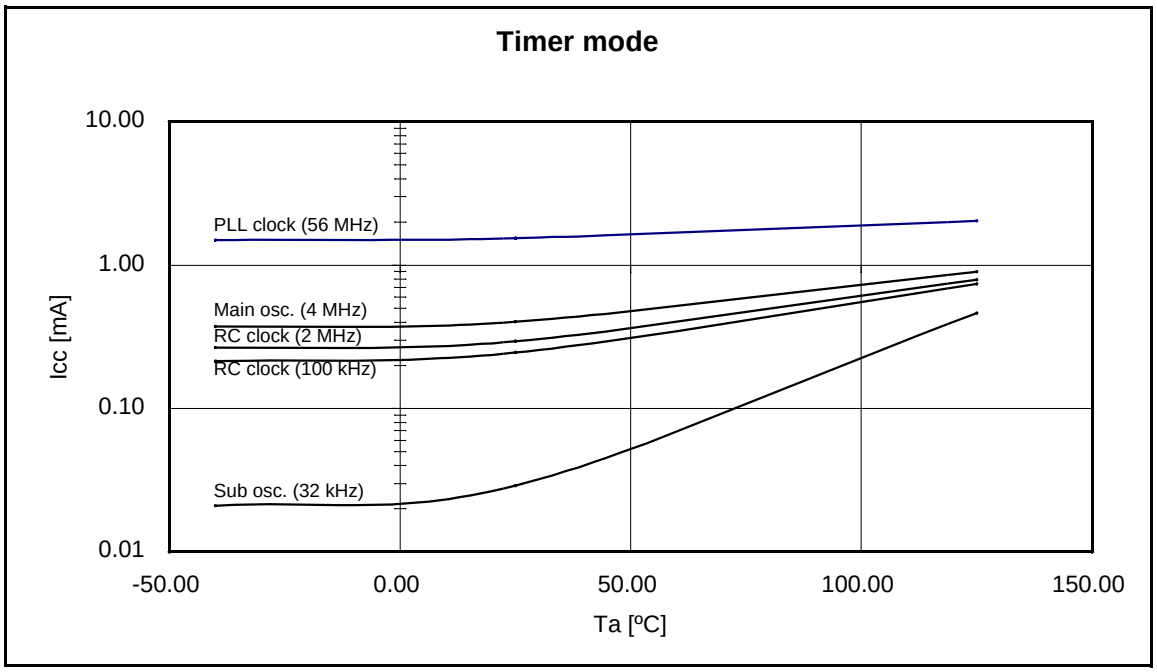

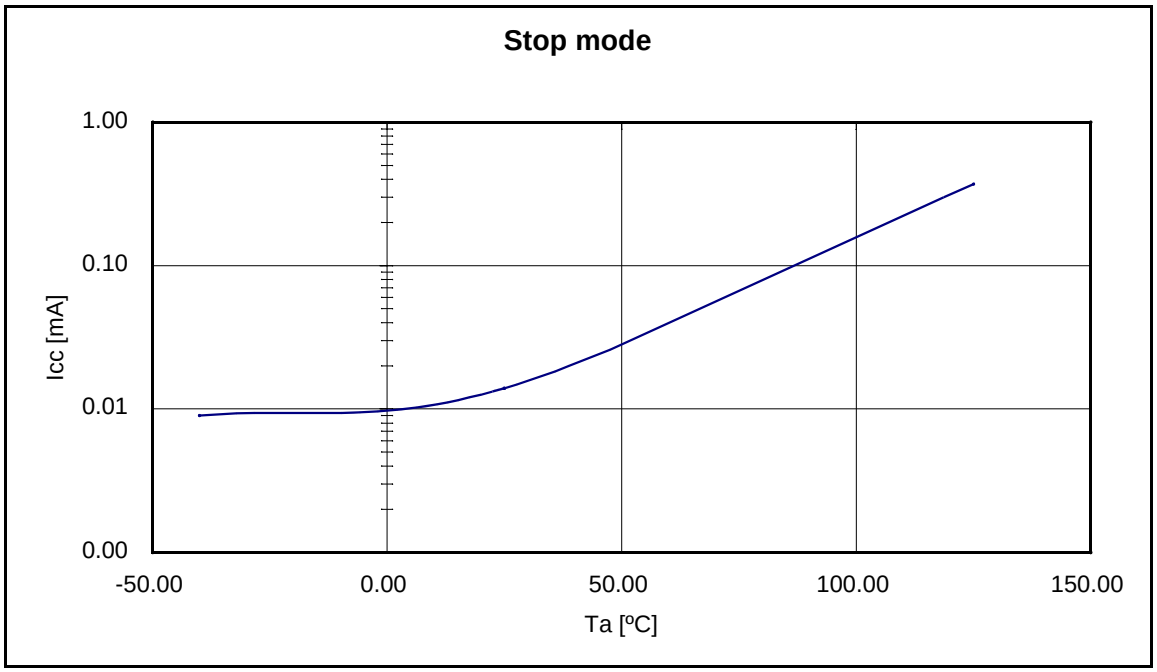

Downloaded from Arrow.com.

Used settings

Mode	Selected Source Clock	Clock/Regulator Settings
Run mode	PLL	CLKS1 = CLKS2 = CLKB = CLKP1 = 56 MHz CLKP2 = 28 MHz Regulator in High Power Mode Core Voltage = 1.9 V
	Main osc.	CLKS1 = CLKS2 = CLKB = CLKP1 = CLKP2 = 4 MHz Regulator in High Power Mode Core Voltage = 1.8 V
	RC clock fast	CLKS1 = CLKS2 = CLKB = CLKP1 = CLKP2 = 2 MHz Regulator in High Power Mode Core Voltage = 1.8 V
	RC clock slow	CLKS1 = CLKS2 = CLKB = CLKP1 = CLKP2 = 100 kHz Regulator in High Power Mode Core Voltage = 1.8 V
	Sub osc.	CLKS1 = CLKS2 = CLKB = CLKP1 = CLKP2 = 32 kHz Regulator in Low Power Mode A Core Voltage = 1.8 V
Sleep mode	PLL	CLKS1 = CLKS2 = CLKP1 = 56 MHz CLKP2 = 28 MHz (CLKB is stopped in this mode) Regulator in High Power Mode Core Voltage = 1.9 V
	Main osc.	CLKS1 = CLKS2 = CLKP1 = CLKP2 = 4 MHz (CLKB is stopped in this mode) Regulator in High Power Mode Core Voltage = 1.8 V
	RC clock fast	CLKS1 = CLKS2 = CLKP1 = CLKP2 = 2 MHz (CLKB is stopped in this mode) Regulator in High Power Mode Core Voltage = 1.8 V
	RC clock slow	CLKS1 = CLKS2 = CLKP1 = CLKP2 = 100 kHz (CLKB is stopped in this mode) Regulator in High Power Mode Core Voltage = 1.8 V
	Sub osc.	CLKS1 = CLKS2 = CLKP1 = CLKP2 = 32 kHz (CLKB is stopped in this mode) Regulator in Low Power Mode A Core Voltage = 1.8 V


Downloaded from Arrow.com.

Used settings

Mode	Selected Source Clock	Clock/Regulator Settings
Timer mode	PLL	CLKMC = 4 MHz, CLKPLL = 56 MHz (System clocks are stopped in this mode) Regulator in High Power Mode, Core Voltage = 1.9 V
	Main osc.	CLKMC = 4 MHz (System clocks are stopped in this mode) Regulator in High Power Mode, Core Voltage = 1.8 V
	RC clock fast	CLKRC = 2 MHz (System clocks are stopped in this mode) Regulator in High Power Mode, Core Voltage = 1.8 V
	RC clock slow	CLKRC = 100 kHz (System clocks are stopped in this mode) Regulator in High Power Mode, Core Voltage = 1.8 V
	Sub osc.	CLKSC = 100 kHz (System clocks are stopped in this mode) Regulator in Low Power Mode A, Core Voltage = 1.8 V
Stop mode	stopped	(All clocks are stopped in this mode) Regulator in Low Power Mode B, Core Voltage = 1.8 V


Downloaded from Arrow.com.

■ PACKAGE DIMENSION MB96(F)34x LQFP 100P

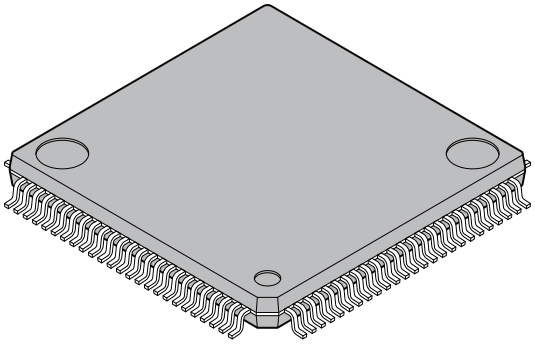100-pin plastic LQFP		
	Lead pitch	0.50 mm
	Package width × package length	14.0 mm × 14.0 mm
	Lead shape	Gullwing
	Sealing method	Plastic mold
	Mounting height	1.70 mm Max
	Weight	0.65 g
(FPT-100P-M20)	Code (Reference)	P-LFQFP100-14×14-0.50

100-pin plastic LQFP
(FPT-100P-M20)

Note 1) * : These dimensions do not include resin protrusion.
Note 2) Pins width and pins thickness include plating thickness.
Note 3) Pins width do not include tie bar cutting remainder.

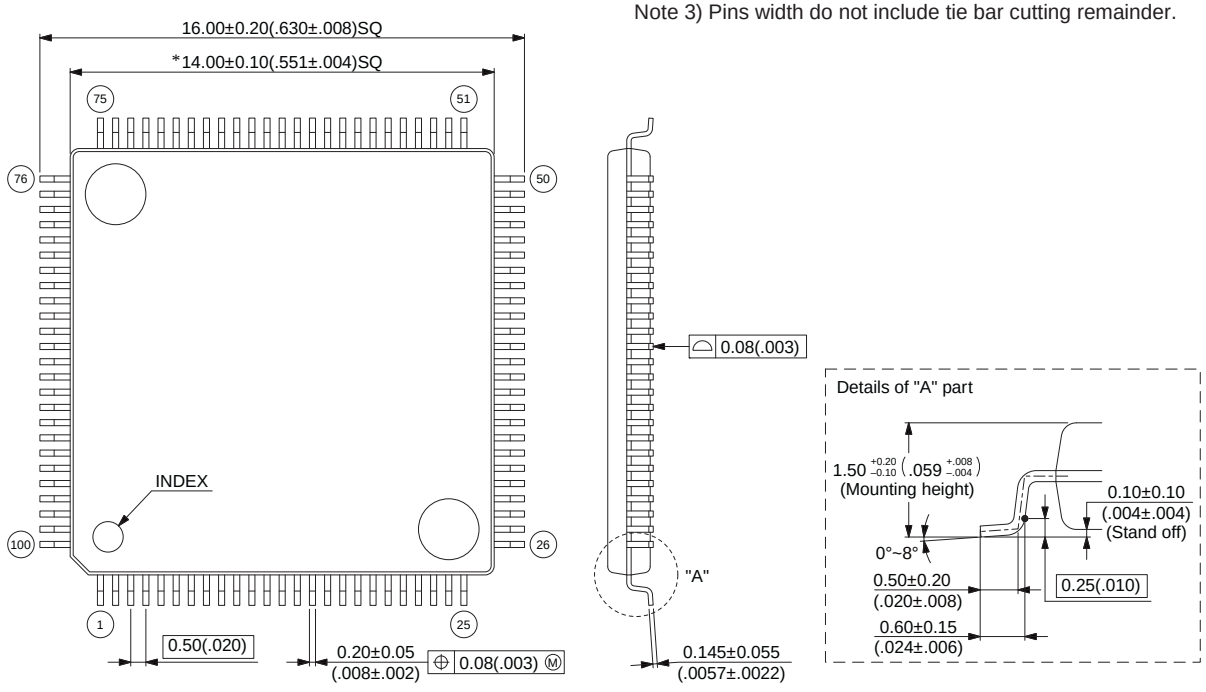


© 2005 -2008 FUJITSU MICROELECTRONICS LIMITED F100031S-c-3-3

Dimensions in mm (inches).
Note: The values in parentheses are reference values


Downloaded from Arrow.com.

■ PACKAGE DIMENSION MB96(F)34x QFP 100P

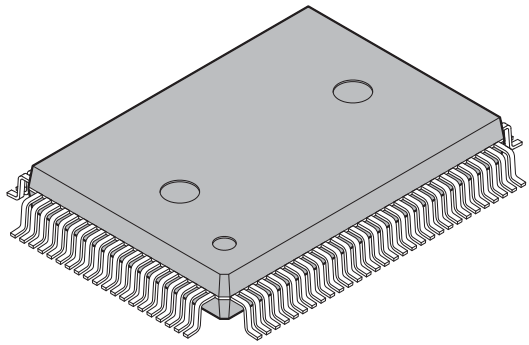100-pin plastic QFP		
	Lead pitch	0.65 mm
	Package width × package length	14.00 mm × 20.00 mm
	Lead shape	Gullwing
	Sealing method	Plastic mold
	Mounting height	3.35 mm MAX
	Code (Reference)	P-QFP100-14×20-0.65
(FPT-100P-M22)		

100-pin plastic QFP
(FPT-100P-M22)

Note 1) * : These dimensions do not include resin protrusion.
Note 2) Pins width and pins thickness include plating thickness.
Note 3) Pins width do not include tie bar cutting remainder.

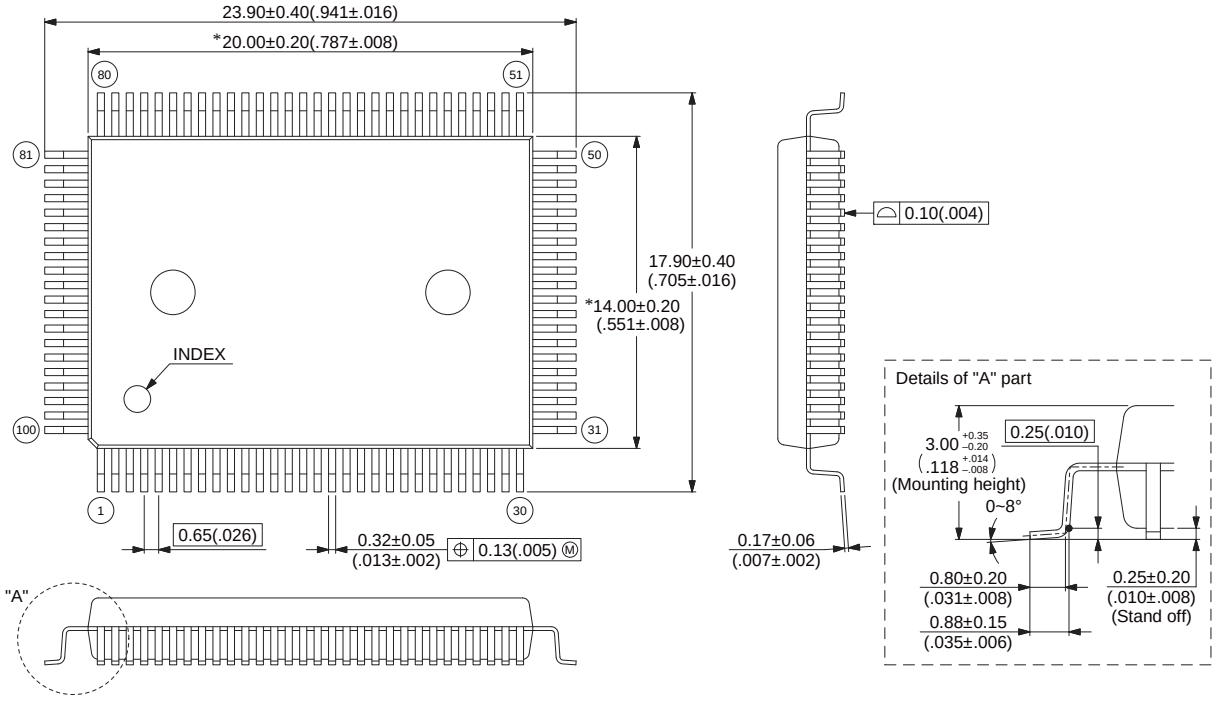

© 2006-2008 FUJITSU MICROELECTRONICS LIMITED F100033S-c-1-2

Dimensions in mm (inches).
Note: The values in parentheses are reference values.

Downloaded from Arrow.com.

■ ORDERING INFORMATION

MCU with CAN controller

Part number	Flash/ROM	Subclock	Persistent Low Voltage Reset	Package
MB96345YSA PQC-GSE2 *1	ROM (160KB)	No	Yes	100 pin Plastic QFP (FPT-100P-M22)
MB96345RSA PQC-GSE2 *1			No	
MB96345YWA PQC-GSE2 *1		Yes	Yes	
MB96345RWA PQC-GSE2 *1			No	
MB96345YSA PMC-GSE2 *1		No	Yes	100 pin Plastic LQFP (FPT-100P-M20)
MB96345RSA PMC-GSE2 *1			No	
MB96345YWA PMC-GSE2 *1		Yes	Yes	
MB96345RWA PMC-GSE2 *1			No	
MB96346YSA PQC-GSE2 *1	ROM (288KB)	No	Yes	100 pin Plastic QFP (FPT-100P-M22)
MB96346RSA PQC-GSE2 *1			No	
MB96346YWA PQC-GSE2 *1		Yes	Yes	
MB96346RWA PQC-GSE2 *1			No	
MB96346YSA PMC-GSE2 *1		No	Yes	100 pin Plastic LQFP (FPT-100P-M20)
MB96346RSA PMC-GSE2 *1			No	
MB96346YWA PMC-GSE2 *1		Yes	Yes	
MB96346RWA PMC-GSE2 *1			No	
MB96F345FSA PQC-GSE2 *1	Flash A (160KB) Data Flash A (64KB)	No	Yes	100 pin Plastic QFP (FPT-100P-M22)
MB96F345DSA PQC-GSE2 *1			No	
MB96F345FWA PQC-GSE2 *1		Yes	Yes	
MB96F345DWA PQC-GSE2 *1			No	
MB96F345FSA PMC-GSE2 *1		No	Yes	100 pin Plastic LQFP (FPT-100P-M20)
MB96F345DSA PMC-GSE2 *1			No	
MB96F345FWA PMC-GSE2 *1		Yes	Yes	
MB96F345DWA PMC-GSE2 *1			No	
MB96F346YSB PQC-GSE2	Flash A (288KB)	No	Yes	100 pin Plastic QFP (FPT-100P-M22)
MB96F346RSB PQC-GSE2			No	
MB96F346YWB PQC-GSE2		Yes	Yes	
MB96F346RWB PQC-GSE2			No	
MB96F346YSB PMC-GSE2		No	Yes	100 pin Plastic LQFP (FPT-100P-M20)
MB96F346RSB PMC-GSE2			No	
MB96F346YWB PMC-GSE2		Yes	Yes	
MB96F346RWB PMC-GSE2			No	

Downloaded from Arrow.com.

MCU with CAN controller

Part number	Flash/ROM	Subclock	Persistent Low Voltage Reset	Package
MB96F347YSB PQC-GSE2	Flash A (416KB)	No	Yes	100 pin Plastic QFP (FPT-100P-M22)
MB96F347RSB PQC-GSE2			No	
MB96F347YWB PQC-GSE2		Yes	Yes	
MB96F347RWB PQC-GSE2			No	
MB96F347YSB PMC-GSE2		No	Yes	100 pin Plastic LQFP (FPT-100P-M20)
MB96F347RSB PMC-GSE2			No	
MB96F347YWB PMC-GSE2		Yes	Yes	
MB96F347RWB PMC-GSE2			No	
MB96F348YSB PQC-GSE2	Flash A (544KB)	No	Yes	100 pin Plastic QFP (FPT-100P-M22)
MB96F348RSB PQC-GSE2			No	
MB96F348YWB PQC-GSE2		Yes	Yes	
MB96F348RWB PQC-GSE2			No	
MB96F348YSB PMC-GSE2		No	Yes	100 pin Plastic LQFP (FPT-100P-M20)
MB96F348RSB PMC-GSE2			No	
MB96F348YWB PMC-GSE2		Yes	Yes	
MB96F348RWB PMC-GSE2			No	
MB96F348TSC PQC-GSE2	Flash A (544KB) Flash B (32KB)	No	Yes	100 pin Plastic QFP (FPT-100P-M22)
MB96F348HSC PQC-GSE2			No	
MB96F348TWC PQC-GSE2		Yes	Yes	
MB96F348HWC PQC-GSE2			No	
MB96F348TSC PMC-GSE2		No	Yes	100 pin Plastic LQFP (FPT-100P-M20)
MB96F348HSC PMC-GSE2			No	
MB96F348TWC PMC-GSE2		Yes	Yes	
MB96F348HWC PMC-GSE2			No	
MB96V300BRB-ES (for evaluation)	Emulated by ext. RAM	Yes	No	416 pin Plastic BGA (BGA-416P-M02)

Downloaded from Arrow.com.

MCU without CAN controller

Part number	Flash/ROM	Subclock	Package
MB96F346ASB PQC-GSE2	Flash A (288KB)	No	100 pin Plastic QFP (FPT-100P-M22)
MB96F346AWB PQC-GSE2		Yes	
MB96F346ASB PMC-GSE2		No	100 pin Plastic LQFP (FPT-100P-M20)
MB96F346AWB PMC-GSE2		Yes	
MB96F347ASB PQC-GSE2	Flash A (416KB)	No	100 pin Plastic QFP (FPT-100P-M22)
MB96F347AWB PQC-GSE2		Yes	
MB96F347ASB PMC-GSE2		No	100 pin Plastic LQFP (FPT-100P-M20)
MB96F347AWB PMC-GSE2		Yes	
MB96F348ASB PQC-GSE2	Flash A (544KB)	No	100 pin Plastic QFP (FPT-100P-M22)
MB96F348AWB PQC-GSE2		Yes	
MB96F348ASB PMC-GSE2		No	100 pin Plastic LQFP (FPT-100P-M20)
MB96F348AWB PMC-GSE2		Yes	
MB96F348CSC PQC-GSE2	Flash A (544KB) Flash B (32KB)	No	100 pin Plastic QFP (FPT-100P-M22)
MB96F348CWC PQC-GSE2		Yes	
MB96F348CSC PMC-GSE2		No	100 pin Plastic LQFP (FPT-100P-M20)
MB96F348CWC PMC-GSE2		Yes	

*1: These devices are under development and specification is preliminary. These products under development may change its specification without notice.

This datasheet is also valid for the following outdated devices:

MB96F346YSA, MB96F346RSA, MB96F346YWA, MB96F346RWA,
MB96F347YSA, MB96F347RSA, MB96F347YWA, MB96F347RWA,
MB96F348YSA, MB96F348RSA, MB96F348YWA, MB96F348RWA,
MB96F348TSB, MB96F348HSB, MB96F348TWB, MB96F348HWB,
MB96F346ASA, MB96F346AWA,
MB96F347ASA, MB96F347AWA,
MB96F348ASA, MB96F348AWA,
MB96F348CSB, MB96F348CWB

Downloaded from Arrow.com.

■ REVISION HISTORY

Revision	Date	Modification
Prelim 1	2007-05-07	Creation
Prelim 2	2007-05-10	External bus hold timing update
Prelim 3	2007-05-23	Electrical characteristics updates
Prelim 4	2007-08-02	Electrical characteristics updates, Product lineup, changes and ordering information
Prelim 5	2007-09-12	Addition of the electrical characteristic examples and the LVD characteristics specifications, updates of the DC characteristics. Pin circuit type drawing modifications.
Prelim 6	2007-11-21	LVD typo correction. Update of the DC characteristics. Typos corrections.
Prelim 7	2007-12-04	Absolute maximum rating asterisks numbering corrected. Typos page 59: Hardware -> Hardware. IO map table regenerated. Typos corrections. IO circuit drawings modified. Renaming of the Main/Satellite Flash into Flash memory A/B. Memory map reworked.

Downloaded from Arrow.com.

Revision	Date	Modification
Prelim 8	2008-02-04	• Satellite Flash -> 32kB Data Flash • MB96345 added (under development) • MB96F348 TSA/HSA/TWA/HWA removed (outdated devices) • Block diagram and pin assignment corrected (existing resource pins) • Pin function table corrected • I/O circuit type diagrams corrected • Memory map cleaned up • "Flash sector configuration" replaced by corrected "User ROM Memory map for Flash devices", “ROM configuration” replaced by “User ROM Memory map for Mask ROM devices” • Parallel Flash programming pinning removed • IO map table regenerated: - Port register: Naming style corrected - Memory control registers renamed (Main/Sat -> A/B) - addresses after 000BFFh removed • Absolute maximum ratings: Pd and Ta specified more precisely • oscillator input levels in oscillation mode with external clock added • Run and Sleep mode currents: 96/48MHz and 72/36MHz settings added • Run mode current spec in 48/24MHz mode corrected • Maximum CLKS1/2 frequency for all devices correctly specified • Maximum CLKP2 for MB96F34xY/R/Axx corrected • External bus timings: missing conditions added and readability improved • Alarm comparator spec updated (transition voltages defined) • MB96V300A removed • Ordering information updated • Typos and formatting corrected

Downloaded from Arrow.com.

Revision	Date	Modification
9	2009-01-09	• Format adjusted to official Fujitsu Microelectronics datasheet standard (mainly style changes and official notes and disclaimer added) • Numbering of Electrical Characteristics subchapters automated • Note about devices under development modified • I/O map: Note added about reserved addresses • ICCSPLL for CLKS1=96MHz mode: increased by 1mA • Serial programming interface: Note about handshaking pins improved • specified AD converter channel offset to 4LSB • package code of MB96V300 corrected in ordering information • Added voltage condition to pull-up resistance spec • Lineup: Term “Data Flash” replaced by “independent 32KB Flash” • Ordering information: column “Independent 32KB Data Flash” replaced by new column “Flash/ROM”, column “Remarks” removed • Official package dimension drawing with additional notes added • Empty pages removed • Alarm comparator: Power supply current max values increased, comparison time reduced, mode transition time and power-up stabilization time newly added • Handling devices: Notes added about Serial communication and about using ceramic resonators. • Feature list and AC Characteristics: 16MHz maximum frequency is valid for crystal oscillators. For resonators, maximum frequency depends on Q-factor • AC characteristics: PLL phase skew spec added, CLKVCO min=64MHz • VOL3 spec improved: spec valid for 3mA load for full Vcc range • MB96F345 added • Preliminary DC spec of MB96345/346 added • Permitted power dissipation of Flash devices in QFP package improved • C-Pin cap spec updated: 4.7uF-10uF capacitor with tolerance permitted • “Preliminary” watermark removed
10	To be released	• I/O map: IOABK0-5 added at address 000A00H-000A05H • Ordering Information: Suffix “A” added to all MB96F345 device versions • AD converter I_{AIN} spec improved: 1uA valid up to 105deg, 1.2uA above 105deg

Downloaded from Arrow.com.

■ MAIN CHANGES IN THIS EDITION

Page	Section	Change Results
92	■ ELECTRICAL CHARACTERISTICS 5. Analog Digital Converter	Corrected "Value" and "Unit" of Zero reading voltage. (AVRL - 1.5 → AVRL - 1.5 LSB AVRL + 0.5 → AVRL + 0.5 LSB AVRL + 2.5 → AVRL + 2.5 LSB LSB → V) Corrected "Value" and "Unit" of Full scale reading voltage. (AVRH - 3.5 → AVRH - 3.5 LSB AVRH - 1.5 → AVRH - 1.5 LSB AVRH + 0.5 → AVRH + 0.5 LSB LSB → V)

Downloaded from Arrow.com.

MEMO

Downloaded from Arrow.com.

MEMO

Downloaded from Arrow.com.

MEMO

Downloaded from Arrow.com.

FUJITSU MICROELECTRONICS LIMITED

Shinjuku Dai-Ichi Seimei Bldg., 7-1, Nishishinjuku 2-chome,
Shinjuku-ku, Tokyo 163-0722, Japan
Tel: +81-3-5322-3329
http://jp.fujitsu.com/fml/en/

For further information please contact:

North and South America
FUJITSU MICROELECTRONICS AMERICA, INC.
1250 E. Arques Avenue, M/S 333
Sunnyvale, CA 94085-5401, U.S.A.
Tel: +1-408-737-5600 Fax: +1-408-737-5999
http://www.fma.fujitsu.com/

Europe
FUJITSU MICROELECTRONICS EUROPE GmbH
Pittlerstrasse 47, 63225 Langen, Germany
Tel: +49-6103-690-0 Fax: +49-6103-690-122
http://emea.fujitsu.com/microelectronics/

Korea
FUJITSU MICROELECTRONICS KOREA LTD.
206 Kosmo Tower Building, 1002 Daechi-Dong,
Gangnam-Gu, Seoul 135-280, Republic of Korea
Tel: +82-2-3484-7100 Fax: +82-2-3484-7111
http://kr.fujitsu.com/fmk/

Asia Pacific
FUJITSU MICROELECTRONICS ASIA PTE. LTD.
151 Lorong Chuan,
#05-08 New Tech Park 556741 Singapore
Tel : +65-6281-0770 Fax : +65-6281-0220
http://www.fmal.fujitsu.com/

FUJITSU MICROELECTRONICS SHANGHAI CO., LTD.
Rm. 3102, Bund Center, No.222 Yan An Road (E),
Shanghai 200002, China
Tel : +86-21-6146-3688 Fax : +86-21-6335-1605
http://cn.fujitsu.com/fmc/

FUJITSU MICROELECTRONICS PACIFIC ASIA LTD.
10/F., World Commerce Centre, 11 Canton Road,
Tsimshatsui, Kowloon, Hong Kong
Tel : +852-2377-0226 Fax : +852-2376-3269
http://cn.fujitsu.com/fmc/en/

Specifications are subject to change without notice. For further information please contact each office.

All Rights Reserved.
The contents of this document are subject to change without notice.
Customers are advised to consult with sales representatives before ordering.
The information, such as descriptions of function and application circuit examples, in this document are presented solely for the purpose of reference to show examples of operations and uses of FUJITSU MICROELECTRONICS device; FUJITSU MICROELECTRONICS does not warrant proper operation of the device with respect to use based on such information. When you develop equipment incorporating the device based on such information, you must assume any responsibility arising out of such use of the information.
FUJITSU MICROELECTRONICS assumes no liability for any damages whatsoever arising out of the use of the information.
Any information in this document, including descriptions of function and schematic diagrams, shall not be construed as license of the use or exercise of any intellectual property right, such as patent right or copyright, or any other right of FUJITSU MICROELECTRONICS or any third party or does FUJITSU MICROELECTRONICS warrant non-infringement of any third-party's intellectual property right or other right by using such information. FUJITSU MICROELECTRONICS assumes no liability for any infringement of the intellectual property rights or other rights of third parties which would result from the use of information contained herein.
The products described in this document are designed, developed and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for use requiring extremely high reliability (i.e., submersible repeater and artificial satellite).
Please note that FUJITSU MICROELECTRONICS will not be liable against you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products.
Any semiconductor devices have an inherent chance of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.
Exportation/release of any products described in this document may require necessary procedures in accordance with the regulations of the Foreign Exchange and Foreign Trade Control Law of Japan and/or US export control laws.
The company names and brand names herein are the trademarks or registered trademarks of their respective owners.

Edited: Sales Promotion Department

Downloaded from Arrow.com.