



TAOGLAS®



Datasheet

GPS/Galileo Patch Antenna for 1575MHz

Part No:
GP.1575.12.4.A.02

Description

12mm GPS/Galileo Patch Antenna

Features:

Passive GPS/Galileo Patch Antenna
Centre Frequency: 1575MHz
Mounted with pin and adhesive tape
Dimensions: 12mm*12mm*4mm
RoHS & REACH Compliant

1.	Introduction	3
2.	Specification	4
3.	Antenna Characteristics	6
4.	Radiation Patterns	10
5.	Mechanical Drawing	12
6.	Antenna Integration Guide	13
7.	Solder Reflow Profile	19
8.	Packaging	20
	Changelog	21

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



This miniaturized ceramic GPS/GALILEO patch antenna is based on smart XtremeGain™ technology. It is mounted via pin and double-sided adhesive and has been selected as optimal solution for the customer device environment.

The GP.1575.12.4.A.02 provides gain and radiation pattern performance supporting solutions with high location accuracy, rapid satellite signal reception and lock, and quick time to first fix.


The compact size of the GP.1575.12.4.A.02 allows it to be used in areas where larger patch antennas won't fit.

Typical applications include:

- Asset Trackers
- Transportation and OBDs

2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	□	□		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	□	□	□		
Galileo	E1 1575.42 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	□	□	□	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	□	□	□	□
L-Band	L-Band 1542 MHz				
	□				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	■	□	□	□	
IRNSS (Regional)	L5 1176.45 MHz				
	□				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	□	□	□	□

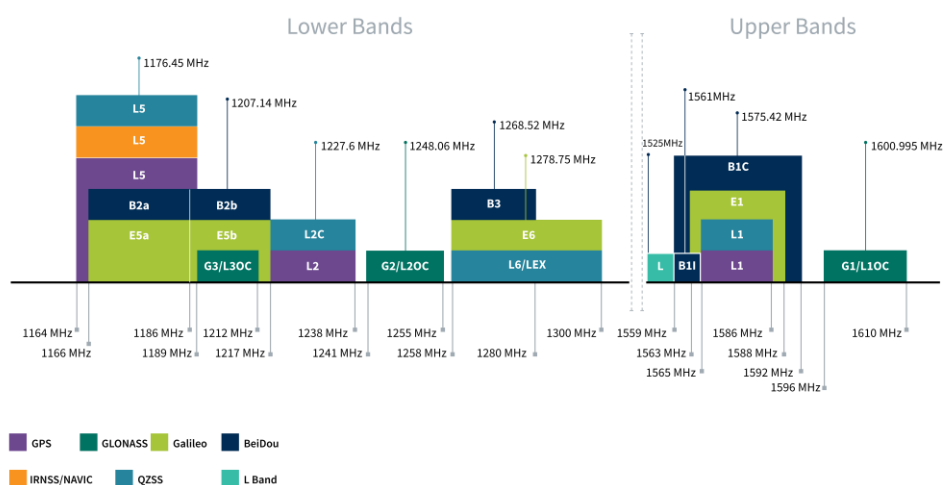

GNSS Bands and Constellations

GNSS Electrical	
Frequency (MHz)	1575.42
Passive Antenna Efficiency (%) (Without cable loss)	65.72
Passive Antenna Gain at Zenith (dBic) (Without cable loss)	3.21
Polarization	RHCP
Impedance	50 Ω

Mechanical	
Dimensions	(12x12x4) mm
Operating Temperatures	-40°C to +85°C

3. Antenna Characteristics

3.1 Test Setup

AUT




Vector Network Analyzer




VNA Test Setup on a 50x50mm Ground Plane


3.2 Return Loss

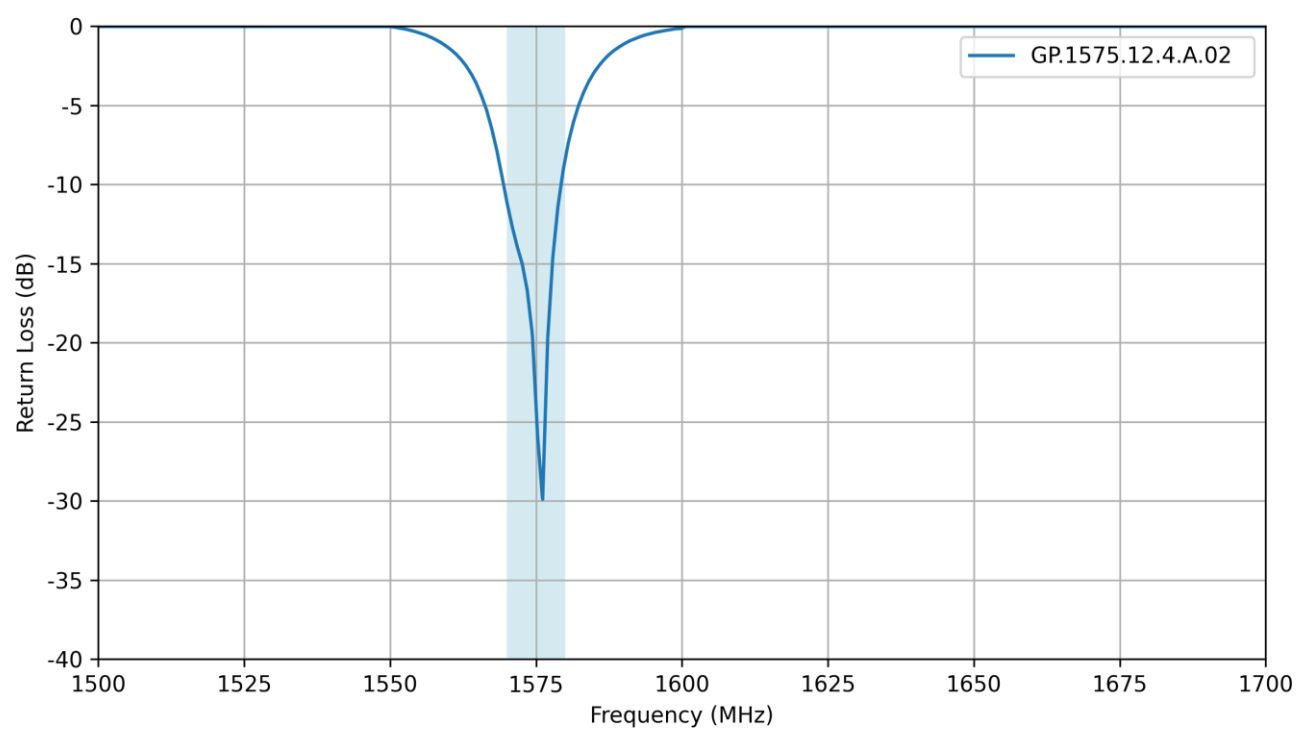


3.3 VSWR

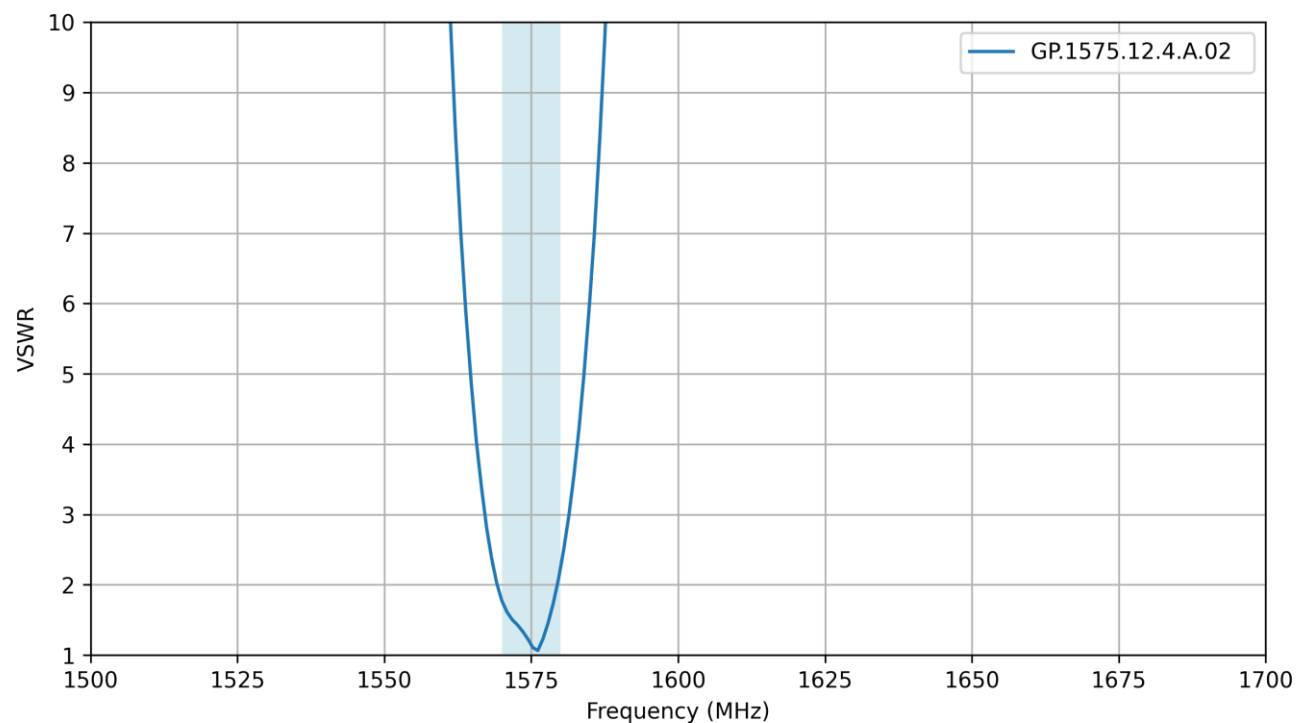


3.4 Efficiency

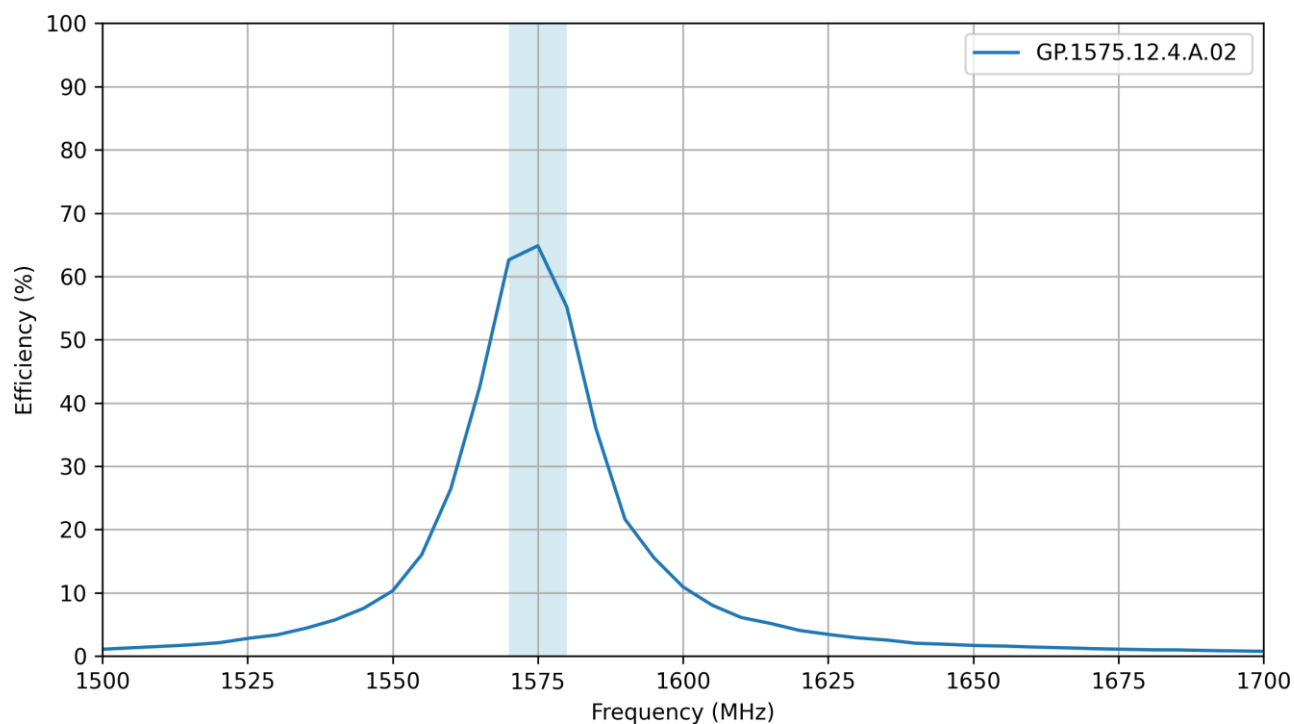

3.5 Average Gain


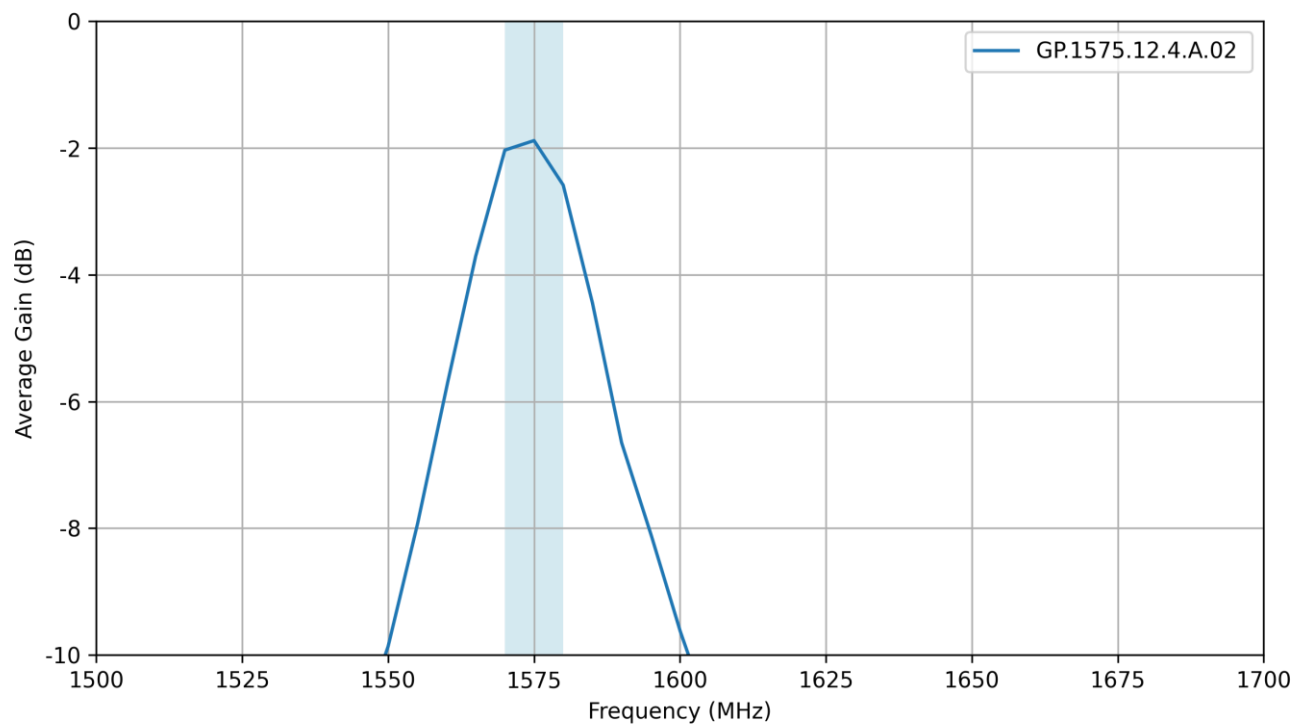


3.6 Peak Gain

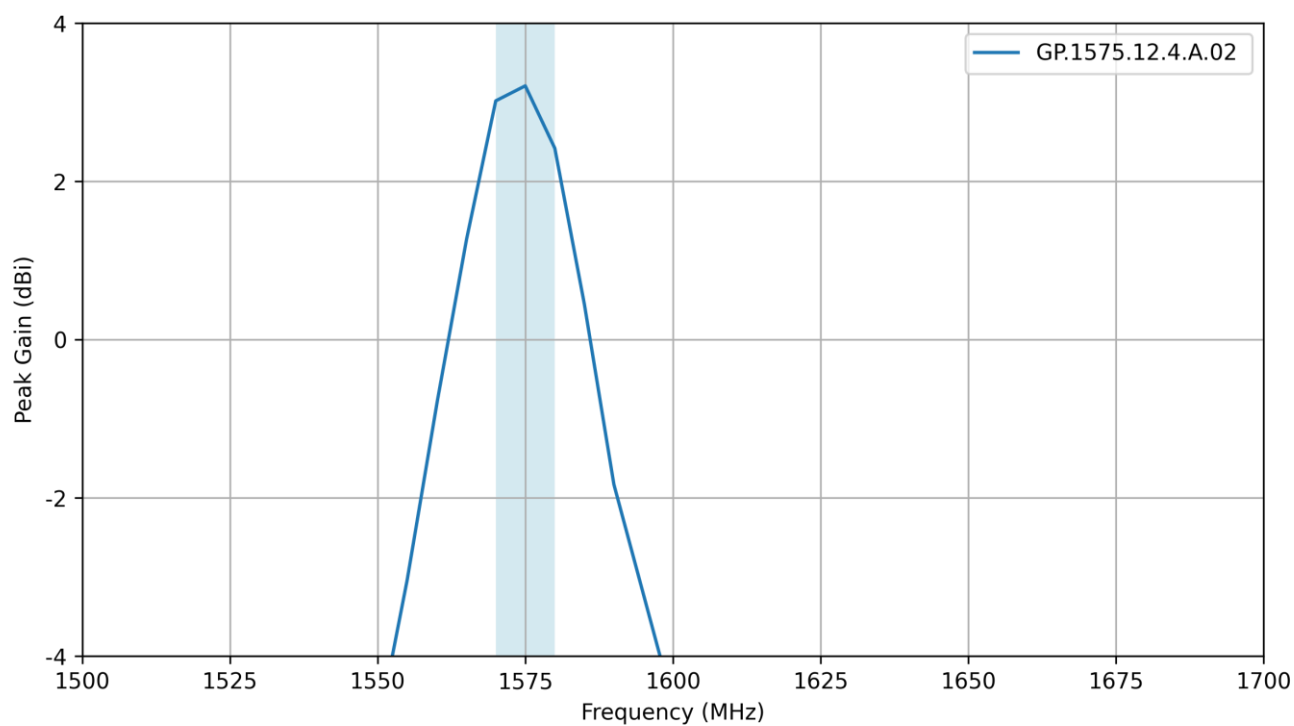



4. Radiation Patterns

4.1 Test Setup

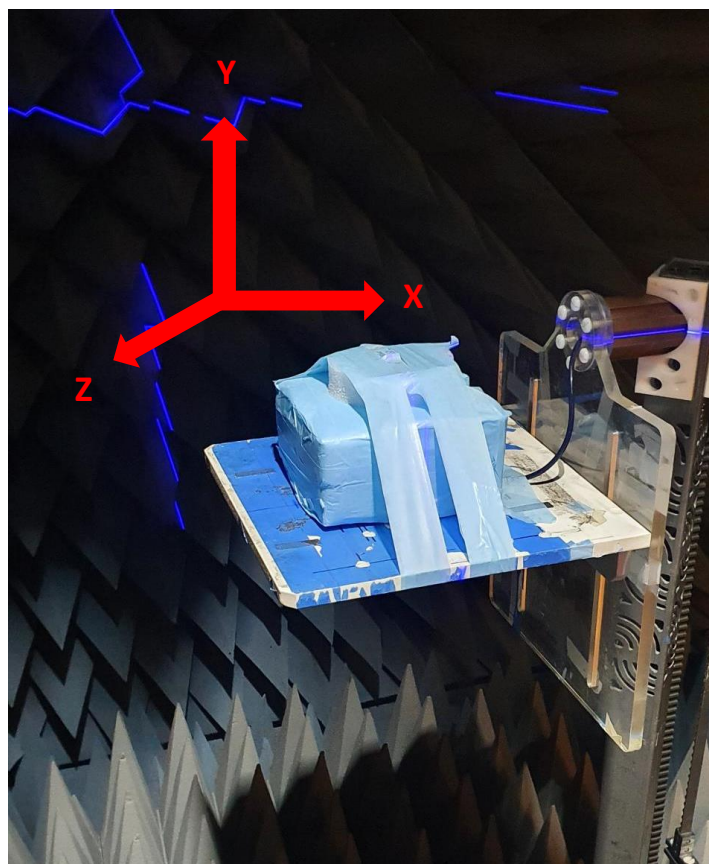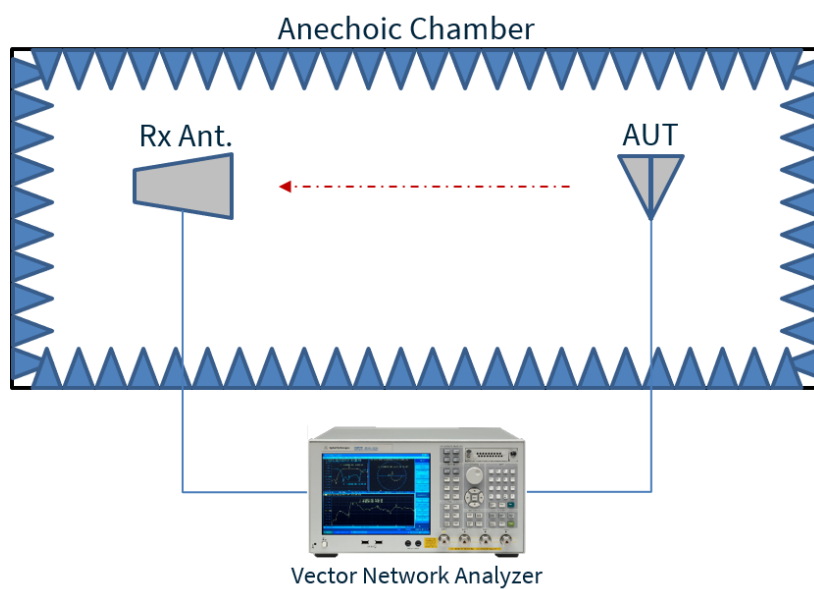

Chamber Test Setup on a 50x50mm Ground Plane

4.2 Patterns at 1575 MHz

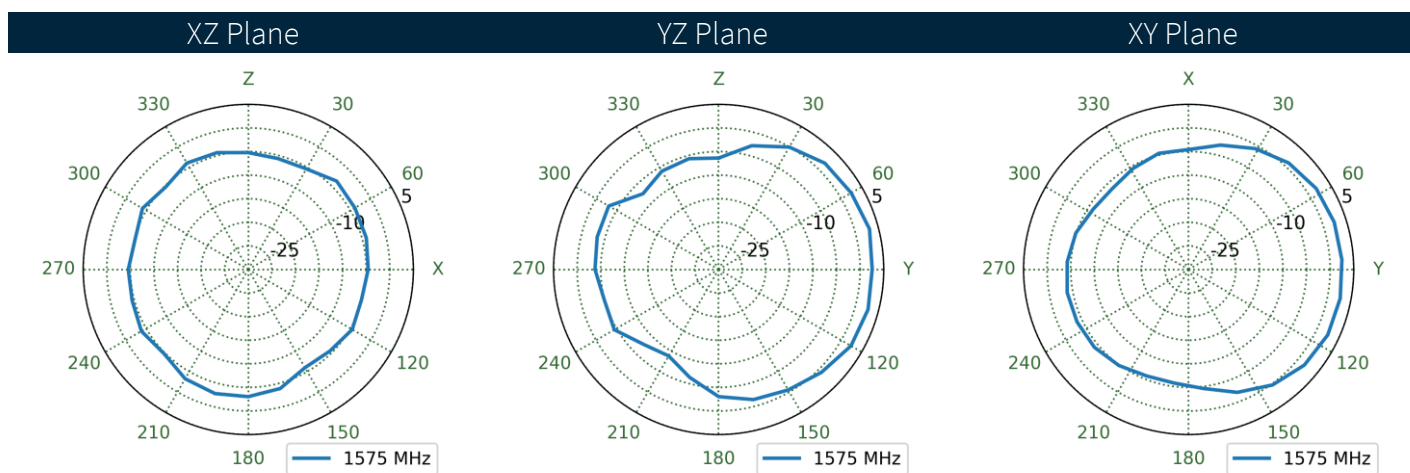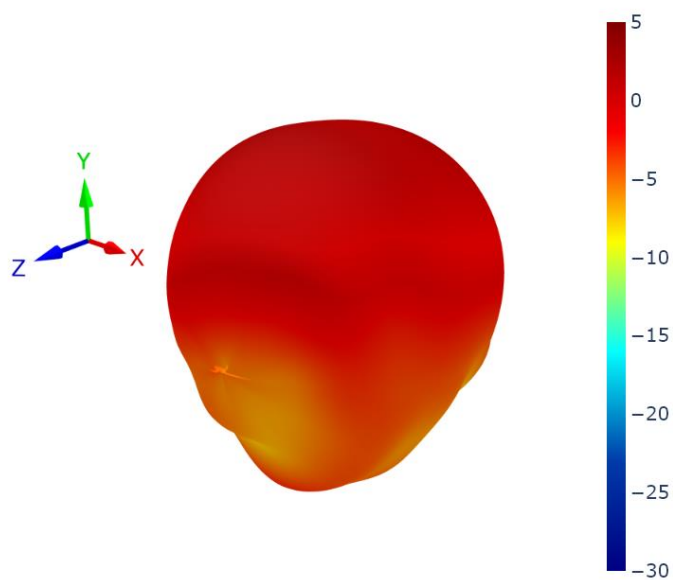

5. Mechanical Drawing

ISO NO.: EDW-12-8-0026

STATE: Release


NOTES: 1. Double sided adhesive area. 

REV.	DESCRIPTION	ENG.	APPROVED	DATE
A	EC-21-08-010	Mickey	Buluto	2021/03/02

Top View 

Side View 

Bottom View

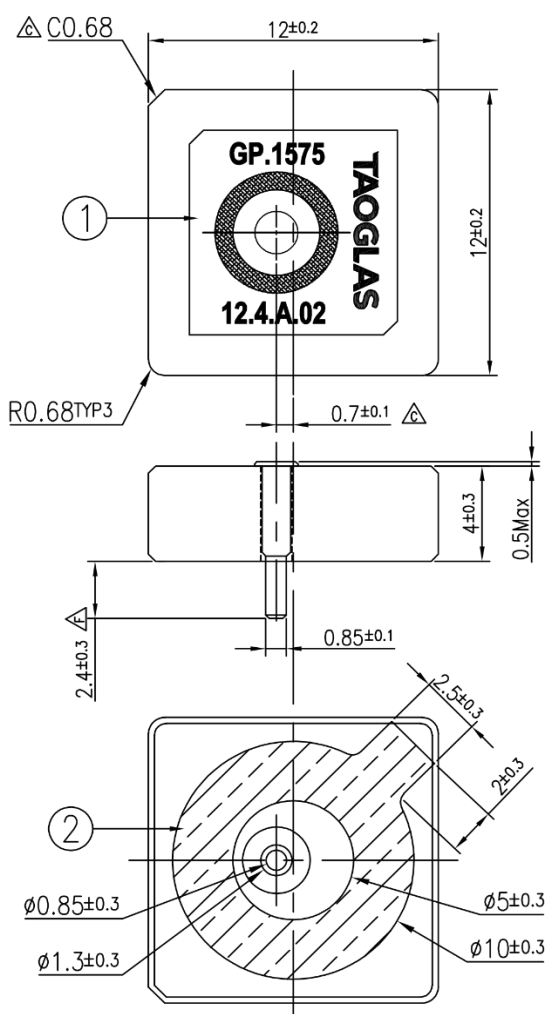

Name	P/N	Material	Finish	QTY
1 GP.1575 Patch	001517F050000A	Ceramic	Brown	1
2 Double sided Adhesive	001517F050000A	Tesa 4872	White Linter	1

APPROVED BY: Joanna	 TAOGLAS. TW Design Centre This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas.
CHECK BY: Joanna	
DRAWN BY: Sandy	
DATE: 2012/01/31	
UNLESS OTHERWISE SPECIFIED TOLERANCES ON:	TITLE : GPS Patch Antenna 1575MHz Ceramic Patch PART NO. : GP.1575.12.4.A.02 UNIT: mm SCALE: 4:1 PAGES: 1/1 REV. F
THIRD ANGLE PROJECTION	

6. Antenna Integration Guide

The following is an example on how to integrate the GP.1575.12.4.A.02 into a design. This antenna has one which is used for the RF Feed. Taoglas recommends using a minimum of 50x50mm ground plane (PCB) to ensure optimal performance.



Top view of PCB.

Please find the Integration files in Altium, 2D formats and the 3D model for the GP.1575.12.4.A.02 here:

<https://www.taoglas.com/product/gp-1575-12-4-a-02-2/>


6.1 Schematic and Symbol Definition



Above is the 3D model of the GP.1575.12.4.A.02 on the PCB.


The circuit symbol for the GP.1575.12.4.A.02 is shown below. The antenna has 1 pin as indicated below.

Pin	Description
1	RF Feed

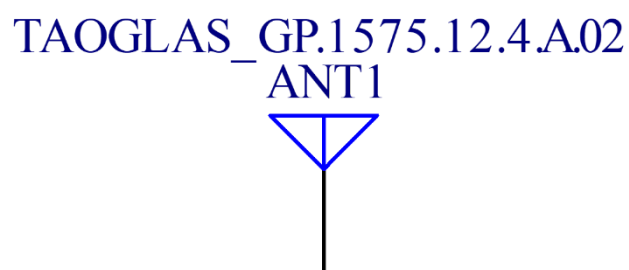


Above is a schematic symbol of GP.1575.12.4.A.02 and a table of the pin definitions.

6.2 Antenna Footprint

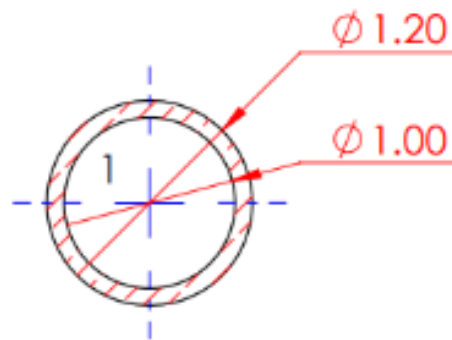

Top Side

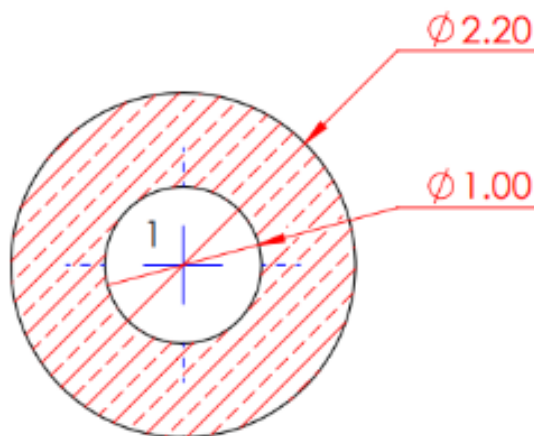


Bottom Side

Pin	Description
1	RF Feed


6.3 Copper Clearance for GP.1575.12.4.A.02

The footprint and clearance on the PCB must comply with the antenna's specification. The PCB layout shown in the diagrams below demonstrates the GP.1575.12.4.A.02 clearance area for Pin 1 (RF Feed Pad). The bottom copper keep out area only applies to the bottom layer and the top copper keep out area applies to all other layers.

There should be a $\varnothing 3\text{mm}$ copper clearance around the antenna pins on the top side of the PCB with a $\varnothing 3.5\text{mm}$ copper clearance around the antenna pins on the bottom side.

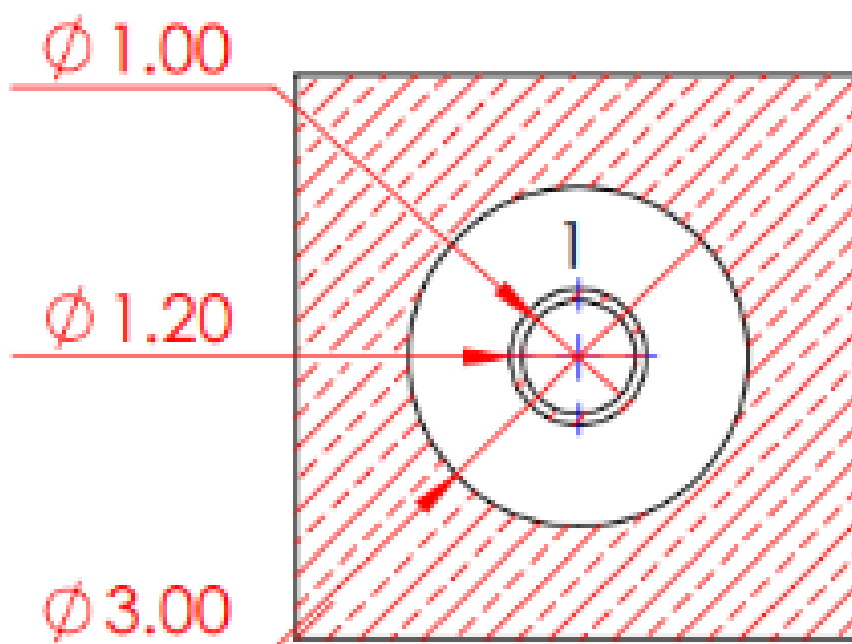

Top Side

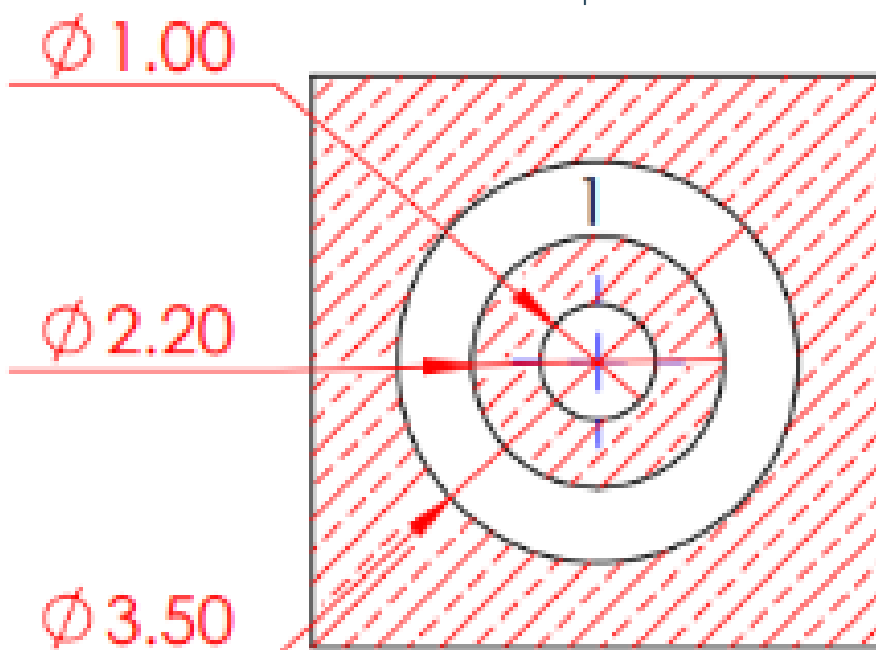

Bottom Side

6.4 Antenna Integration

The GP.1575.12.4.A.02 should be placed in the centre of the PCB to take advantage of the ground plane. The RF trace must maintain a 50 Ohm transmission line. Ground vias should be placed around the copper clearance area.





Bottom view of the PCB, showing transmission lines and integration notes.

6.5 Final Integration

The bottom side image shown below highlights the antenna transmission line. Taoglas recommends using a minimum of 50x50mm ground plane (PCB) to ensure optimal performance.



Top Side (GP.1575.12.4.A.02 placement on 50x50mm PCB)

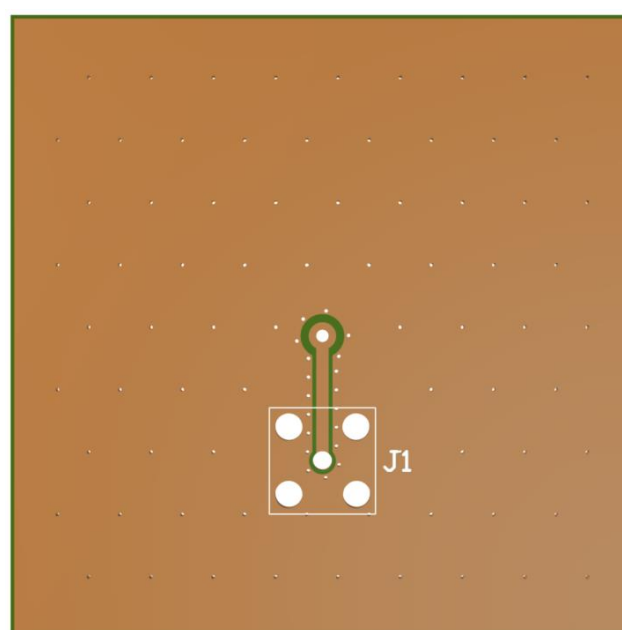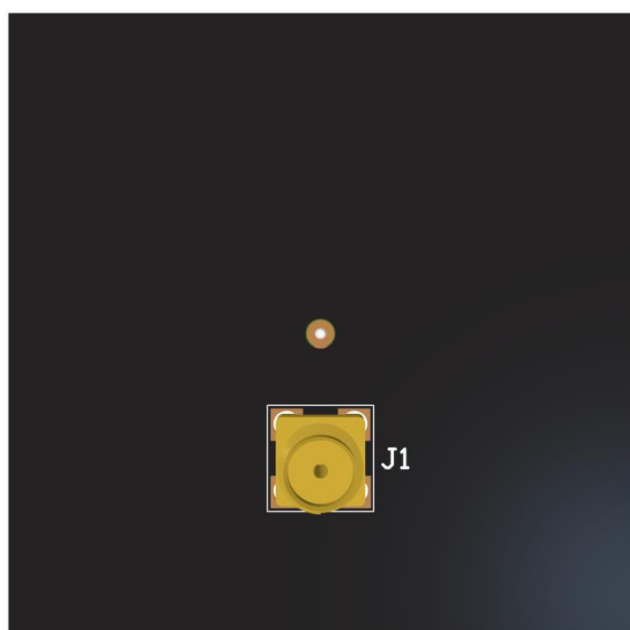

Bottom Side

7. Solder Reflow Profile

7.1 Manual Soldering Method

Soldering Temperature: 360-380°C


Soldering Duration: 3~4 seconds



7.2 Automated Soldering Machine

Soldering Temperature: 360-380°C


Soldering Duration: 3~4 seconds

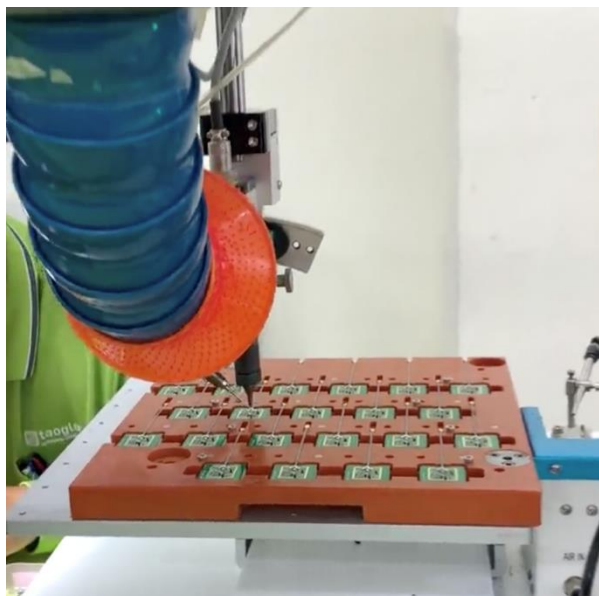


Please note that this process will require a one-time fixture to be made for each PCB design.

8. Packaging


90pcs GP.1575.12.4.A.02 per Tray
Dimensions: 350*200*15mm
Weight: 720g

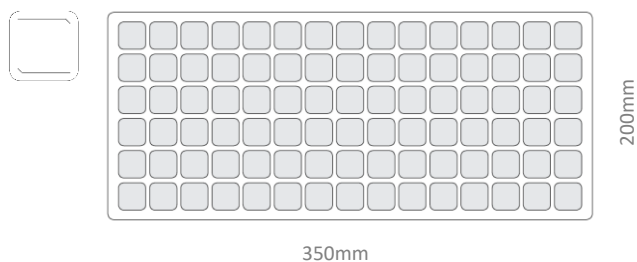

900pcs GP.1575.12.4.A.02 per Inner Carton
Dimensions: 355*205*125mm
Weight: 7.2Kg

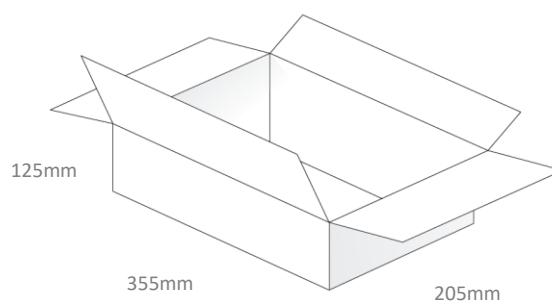

1800pcs GP.1575.12.4.A.02 per Carton
Dimensions: 425*365*145mm
Weight: 14.4Kg

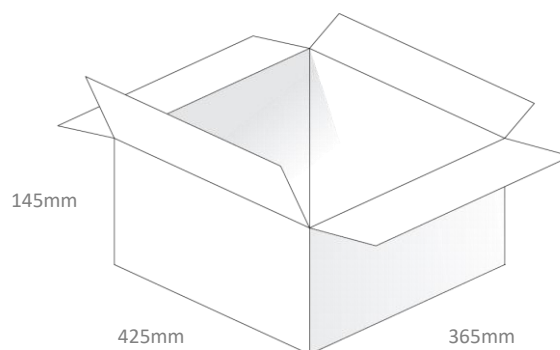

Changelog for the datasheet

SPE-12-8-093 – GP.1575.12.4.A.02

Revision: E (Current Version)

Date:	2023-12-19
Changes:	Antenna integration guide update
Changes Made by:	Gary West

Previous Revisions

Revision: D

Date:	2022-09-27
Changes:	Full Data Sheet Update
Changes Made by:	Evan Murphy

Revision: C

Date:	2017-05-15
Changes:	
Changes Made by:	Technical Writer

Revision: B

Date:	2012-07-19
Changes:	
Changes Made by:	Technical Writer

Revision: A (Original First Release)

Date:	2009-08-10
Notes:	
Author:	Technical Writer

