

DUAL 4-CHANNEL MULTIPLEXER

■ GENERAL DESCRIPTION

The NJU4052B is a dual 4-channel multiplexer with two binary control inputs and an inhibit input.

The two binary control input signals select 1 of 4 pairs of channels to be turned on and connect them to the two outputs.


The operating voltage is as wide as 3 to 18V and the quiescent current is as low as $5\mu\text{A}$ max. (at $V_{DD}=5\text{V}$).

It is equivalent to RCA CD4052B and Motorola MC14052B.


■ PACKAGE OUTLINE



NJU4052BD



NJU4052BM




NJU4052BV


■ FEATURES

- High ON/OFF Output Voltage Ratio --- 65dB Typ. ($R_L=10\text{k}\Omega$)
- Low Quiescent Current --- $5\mu\text{A}$ Typ. at $V_{DD}=5\text{V}$
- Low Crosstalk between channels --- 80dB Typ.
- Wide Operating Voltage Range. --- 3 ~ 18V
- Linearity in the transfer characteristics.
 $\Delta R_{ON} < 60\Omega$ ($V_{IN}=V_{DD} \sim V_{EE}$, $V_{DD}=15\text{V}$)
- Package Outline --- DIP/DMP/SSOP 16
- C-MOS Technology


■ BLOCK DIAGRAM

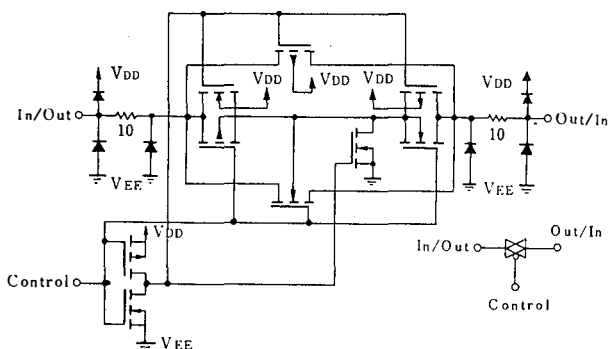

■ PIN CONFIGURATION



■ EQUIVALENT CIRCUIT

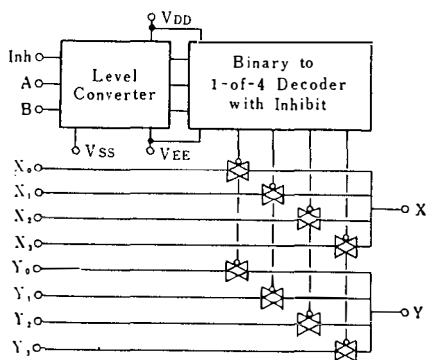

■ TRUTH TABLE

INH	B	A	On Switch	
0	0	0	Y_0	X_0
0	0	1	Y_1	X_1
0	1	0	Y_2	X_2
0	1	1	Y_3	X_3
1	x	x	None	

x: Don't Care

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V_{DD} - V_{EE}$	- 0.5 ~ + 20	V
Input Voltage(Control Signal)	V_{IN}	$V_{SS}-0.5 \sim V_{DD}+0.5$	V
Input Voltage(Analog Signal)	V_{SIG}	$V_{EE}-0.5 \sim V_{DD}+0.5$	V
Input Current	I_{IN}	± 10	mA
Output Current	I_{OUT}	± 10	mA
Power Dissipation	P_D	500 (DIP) 200 (DMP) 300 (SSOP)	mW
Operating Temperature Range	T_{opr}	- 40 ~ + 85	°C
Storage Temperature Range	T_{stg}	- 65 ~ + 150	°C

6

■ ELECTRICAL CHARACTERISTICS

• DC Characteristics

($V_{SS}=0V$)

PARAMETER	SYMBOL	CONDITIONS	V_{DD} (V)	Ta=-40°C		Ta=25°C			Ta=85°C		UNIT
				MIN	MAX	MIN	TYP	MAX	MIN	MAX	
Quiescent Current	I_{DD}	No signal Per Package	5 10 15 20		5 10 20 100			5 10 20 100		150 300 600 3000	μA
On-State Resistance	R_{ON}	$0 \leq V_{IS} \leq V_{DD}$ $V_{EE}=V_{SS}=0V$	5 10 15		500 210 140		220 100 60	600 250 160		800 300 200	Ω
On-State Resistance Deviation	ΔR_{ON}	Between 2 channels $V_{EE}=V_{SS}=0V$	5 10 15				15 10 5				Ω
Off-Channel Leakage Current		Each channel $V_{EE}=V_{SS}=0V$	18		±1000		±10	±100		±1000	nA
Input Capacitance	C_{IN}	$V_{IN}=0V$ Control Inhibit Switch					5.0 10	7.5			pF
Low Level Input Voltage	V_{IL}	$R_L=10k\Omega$ $SW=V_{DD}$ $V_{EE}=V_{SS}$	5 10 15		1.5 3.0 4.0			1.5 3.0 4.0		1.5 3.0 4.0	V
High Level Input Voltage	V_{IH}	$R_L=10k\Omega$ $SW=V_{DD}$ $V_{EE}=V_{SS}$	5 10 15		3.5 7.0 11.0		3.5 7.0 11.0			3.5 7.0 11.0	V
Input Current	± I_{IN}	$V_{IN}=0$ or 18V	18		±0.1			±0.1		± 1	μA


■ SWITCHING CHARACTERISTICS

(Ta=25°C, CL=50pF)


PARAMETER		SYMBOL	CONDITIONS	V _{DD} (V)	MIN	TYP	MAX	UNIT
Propagation Delay Time	SW Input to Output	t _{PLH}	R _L =10kΩ	5	15	45	ns	
				10	8	30		
				15	5	20		
	CONT Input to Output	t _{PHL}		5	15	45	ns	
				10	8	30		
				15	5	20		
		t _{PHL}	5	450	1000	ns		
			10	200	500			
			15	150	400			
		t _{PZH}	5	450	1000			
			10	200	500			
			15	150	400			
Output Enable Time		t _{PHZ}	R _L =10kΩ	5	600	1400	ns	
				10	250	700		
				15	200	500		
Output Disable Time				5	600	1400	ns	
					10	250		700
					15	200		500
Sine-Wave Distortion			R _L =10kΩ, f=1kHz, V _{IS} =5V _{P-P}	10	0.05		%	
Feedthrough (all-ch. off)			R _L =1kΩ, 20log ₁₀ V _{OS} /V _{IS} =-50dB	10	4.5		MHz	
Crosstalk	SW A to B		R _L =1kΩ, V _{IS} =1/2(V _{DD} -V _{SS}) _{P-P}	10	3.0		MHz	
	Control-Out		R _I =1kΩ, R _L =10kΩ, tr=tf=20ns CONTROL/INHIBIT	10	30		mV	

MEASUREMENT CIRCUITS


1. Noise Margin




2. Propagation Delay

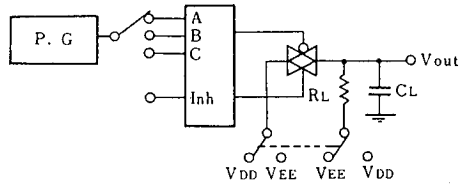


3. Feedthrough

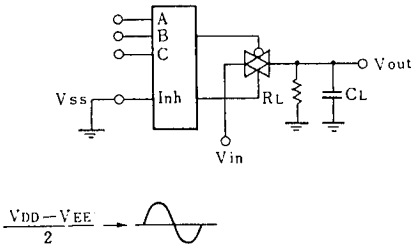

4. Crosstalk (Switch A and B)

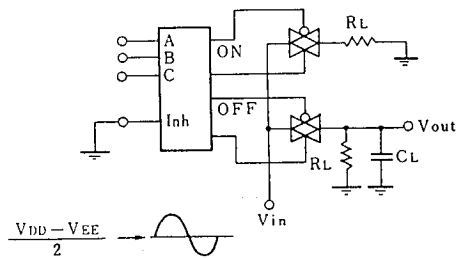

5. Crosstalk (Control and Out)



IN
The specifications of this databook are only
intended for information, without any warranty
as regards either its accuracy or its omission. The
application circuits in this databook are
described only to show representative uses
of the product and do not constitute the
warranty or performance of any particular
the industrial rights.