


# EMT18 / UMT18N / IMT18

General Purpose Transistor (Dual Transistor)

Datasheet

| Parameter | Tr1 and Tr2 |
|---|---|
| $V_{CEO}$ | -12V |
| $I_C$ | -500mA |

## ●Outline

| | |
|---|---|
| SOT-563<br><br>EMT18<br>(EMT6) | SOT-363<br><br>UMT18N<br>(UMT6) |
| SOT-457<br><br>IMT18<br>(SMT6) | |


## ●Features

1)Two 2SA2018 chips in a EMT or UMT or SMT package.
2)Mounting possible with EMT3 or UMT3 or SMT3 automatic mounting machines.
3)Transistor elements are independent, eliminating interference.

## ●Inner circuit


EMT18 / UMT18N

(1) Tr1 Emitter
(2) Tr1 Base
(3) Tr2 Collector
(4) Tr2 Emitter
(5) Tr2 Base
(6) Tr1 Collector




IMT18

(1) Tr1 Collector
(2) Tr2 Base
(3) Tr2 Emitter
(4) Tr2 Collector
(5) Tr1 Base
(6) Tr1 Emitter




## ●Application

LOW FREQUENCY AMPLIFIER, DRIVER

## ●Packaging specifications

| Part No. | Package | Package size | Taping code | Reel size (mm) | Tape width (mm) | Basic ordering unit.(pcs) | Marking |
|---|---|---|---|---|---|---|---|
| EMT18 | SOT-563 (EMT6) | 1616 | T2R | 180 | 8 | 8000 | T18 |
| UMT18N | SOT-363 (UMT6) | 2021 | TR | 180 | 8 | 3000 | T18 |
| IMT18 | SOT-457 (SMT6) | 2928 | T108 | 180 | 8 | 3000 | T18 |


© 2015 ROHM Co., Ltd. All rights reserved.


Downloaded from Arrow.com.

## ●Absolute maximum ratings ($T_a$ = 25°C)

<It is the same ratings for the Tr1 and Tr2>

| Parameter | | Symbol | Values | Unit |
|---|---|---|---|---|
| Collector-base voltage | | $V_{CBO}$ | -15 | V |
| Collector-emitter voltage | | $V_{CEO}$ | -12 | V |
| Emitter-base voltage | | $V_{EBO}$ | -6 | V |
| Collector current | | $I_C$ | -500 | mA |
| | | $I_{CP}$ *1 | -1 | A |
| Power dissipation | EMT18/ UMT18N | $P_D$ *2 *3 | 150 | mW/Total |
| | IMT18 | $P_D$ *2 *4 | 300 | mW/Total |
| Junction temperature | | $T_j$ | 150 | ℃ |
| Range of storage temperature | | $T_{stg}$ | -55 to +150 | ℃ |

## ●Electrical characteristics ($T_a$ = 25°C)

<It is the same characteristics for the Tr1 and Tr2>

| Parameter | Symbol | Conditions | Values | | | Unit |
|---|---|---|---|---|---|---|
| | | | Min. | Typ. | Max. | |
| Collector-base breakdown voltage | $BV_{CBO}$ | $I_C$ = -10μA | -15 | - | - | V |
| Collector-emitter breakdown voltage | $BV_{CEO}$ | $I_C$ = -1mA | -12 | - | - | V |
| Emitter-base breakdown voltage | $BV_{EBO}$ | $I_E$ = -10μA | -6 | - | - | V |
| Collector cut-off current | $I_{CBO}$ | $V_{CB}$ = -15V | - | - | -100 | nA |
| Emitter cut-off current | $I_{EBO}$ | $V_{EB}$ = -6V | - | - | -100 | nA |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | $I_C$ = -200mA, $I_B$ = -10mA | - | -100 | -250 | mV |
| DC current gain | $h_{FE}$ | $V_{CE}$ = -2V, $I_C$ = -10mA | 270 | - | 680 | - |
| Transition frequency | $f_T$ | $V_{CE}$ = -2V, $I_E$ = 10mA, f = 100MHz | - | 260 | - | MHz |
| Output capacitance | $C_{ob}$ | $V_{CB}$ = -10V, $I_E$ = 0A, f = 1MHz | - | 6.5 | - | pF |

*1 Pw=1ms Single Pulse

*2 Each terminal mounted on a reference land

*3 120mW per element must not be exceeded.

*4 200mW per element must not be exceeded.


© 2015 ROHM Co., Ltd. All rights reserved.


Downloaded from Arrow.com.

## ●Electrical characteristic curves ($T_a$ = 25°C)

<For Tr1 and Tr2 in common>

Fig.1 Grounded emitter propagation characteristics

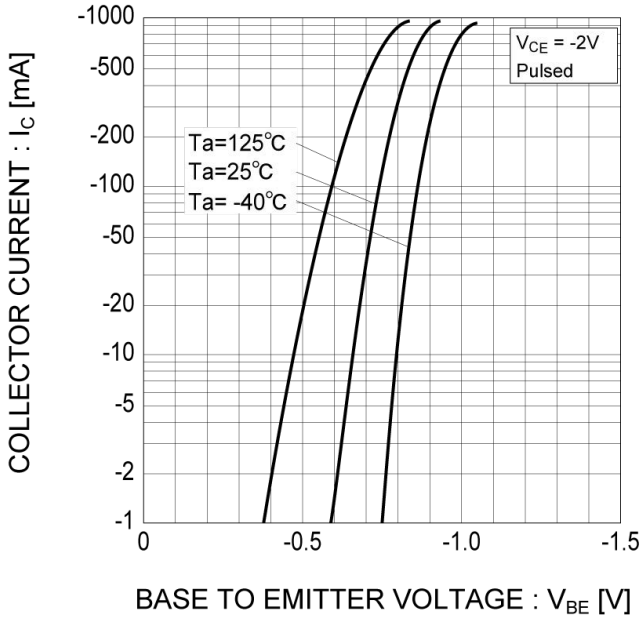



Fig.2 Typical output characteristics

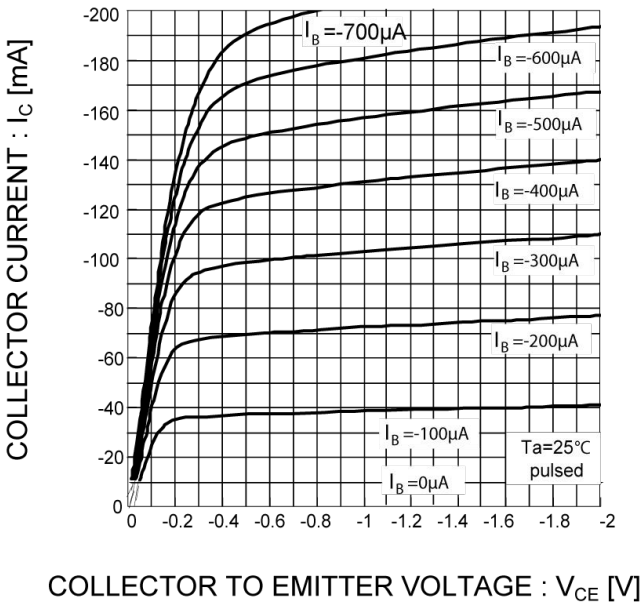



Fig.3 DC current gain vs. collector current (I)


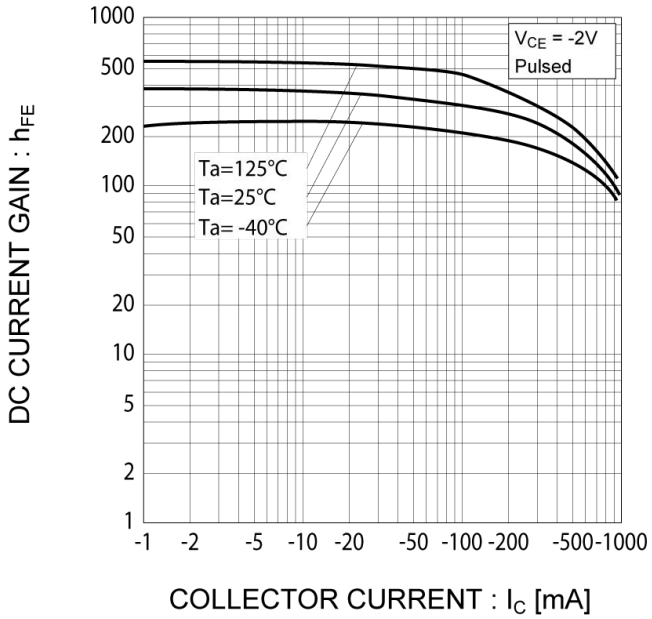



Fig.4 DC current gain vs. collector current (II)



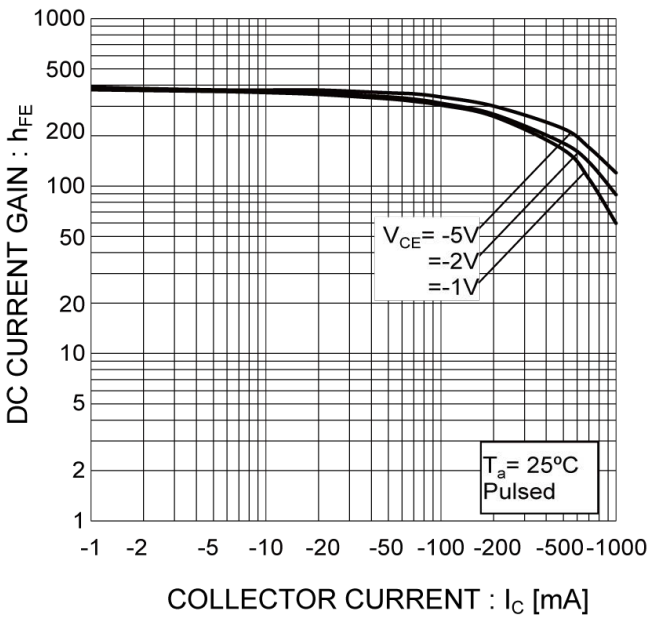

© 2015 ROHM Co., Ltd. All rights reserved.


Downloaded from Arrow.com.

## ●Electrical characteristic curves ($T_a$ = 25°C)

<For Tr1 and Tr2 in common>

Fig.5 Collector-emitter saturation voltage vs. collector current (I)

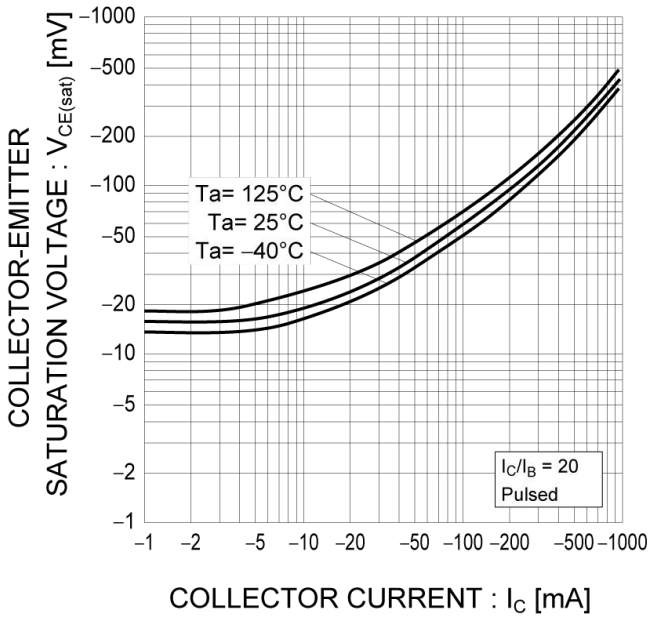



Fig.6 Collector-emitter saturation voltage vs. collector current (II)

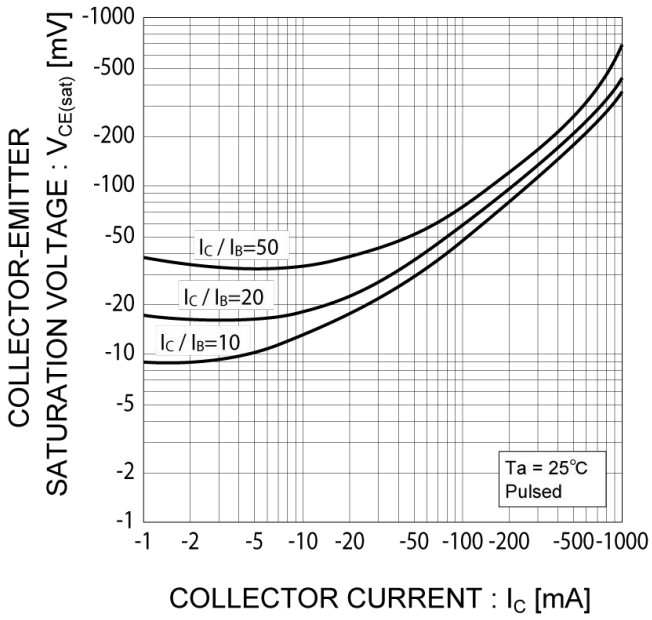



Fig.7 Base-emitter saturation voltage vs. collector current


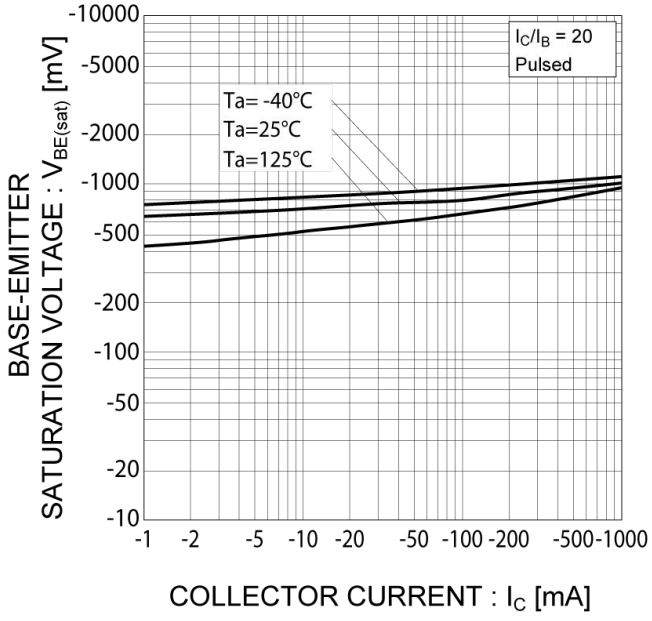



Fig.8 Gain bandwidth product vs. emitter current



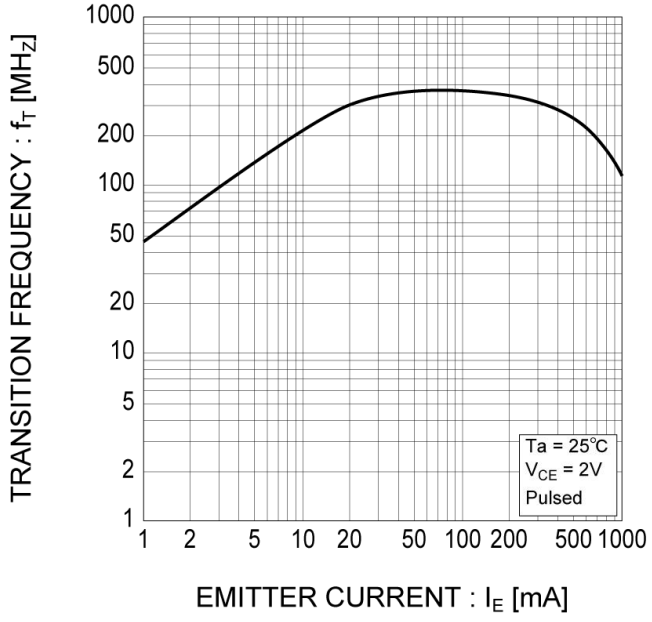

© 2015 ROHM Co., Ltd. All rights reserved.


Downloaded from Arrow.com.

## ●Electrical characteristic curves ($T_a$ =25°C)

<For Tr1 and Tr2 in common>

Fig.9 Collector output capacitance vs. collector-base voltage
Emitter input capacitance vs. emitter-base voltage

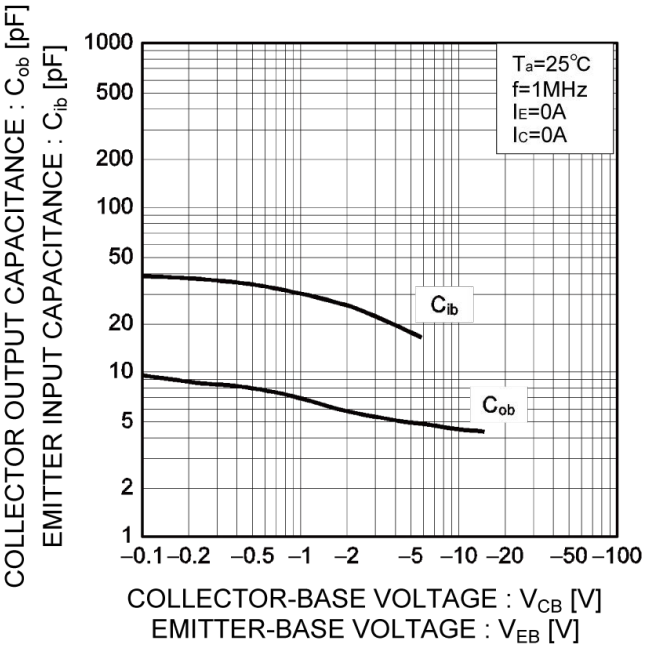



Fig.10 Safe Operating Area

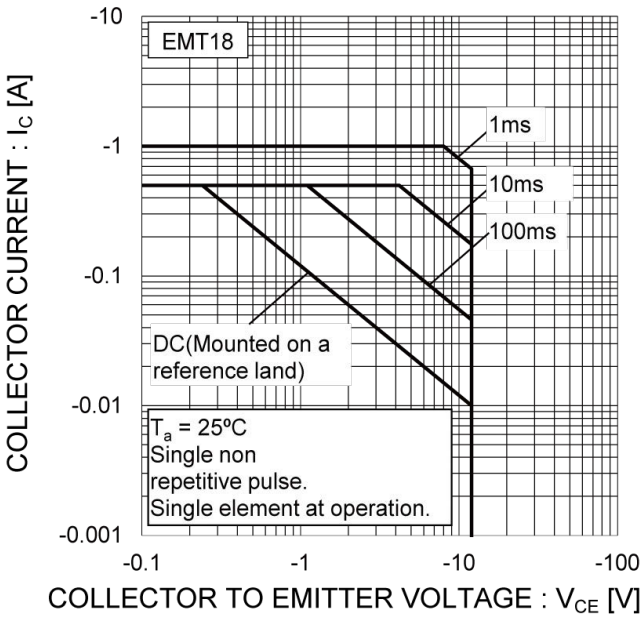



Fig.11 Safe Operating Area


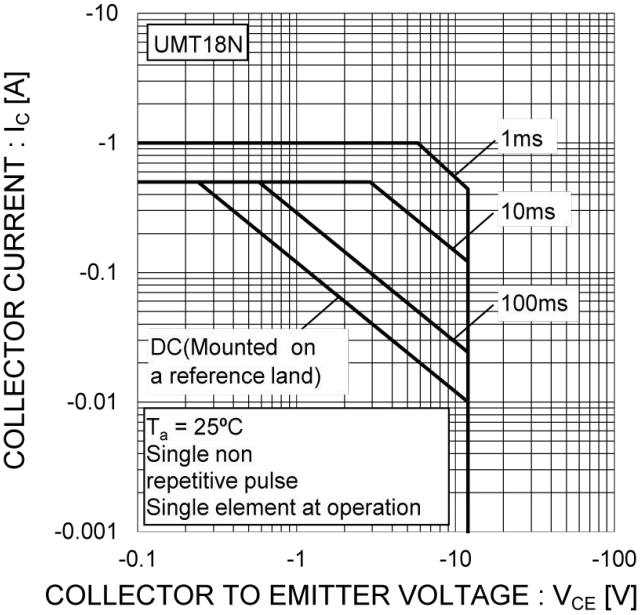



Fig.12 Safe Operating Area



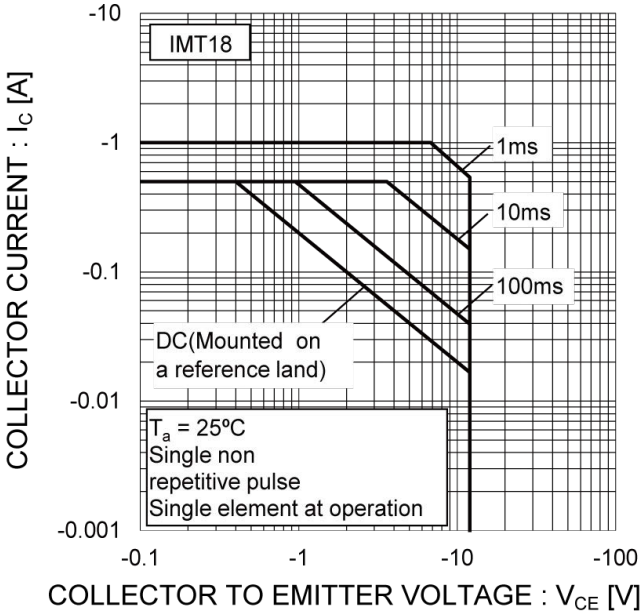


© 2015 ROHM Co., Ltd. All rights reserved.


Downloaded from Arrow.com.

## ●Dimensions

SOT-563
SC-107C
( EMT6 )

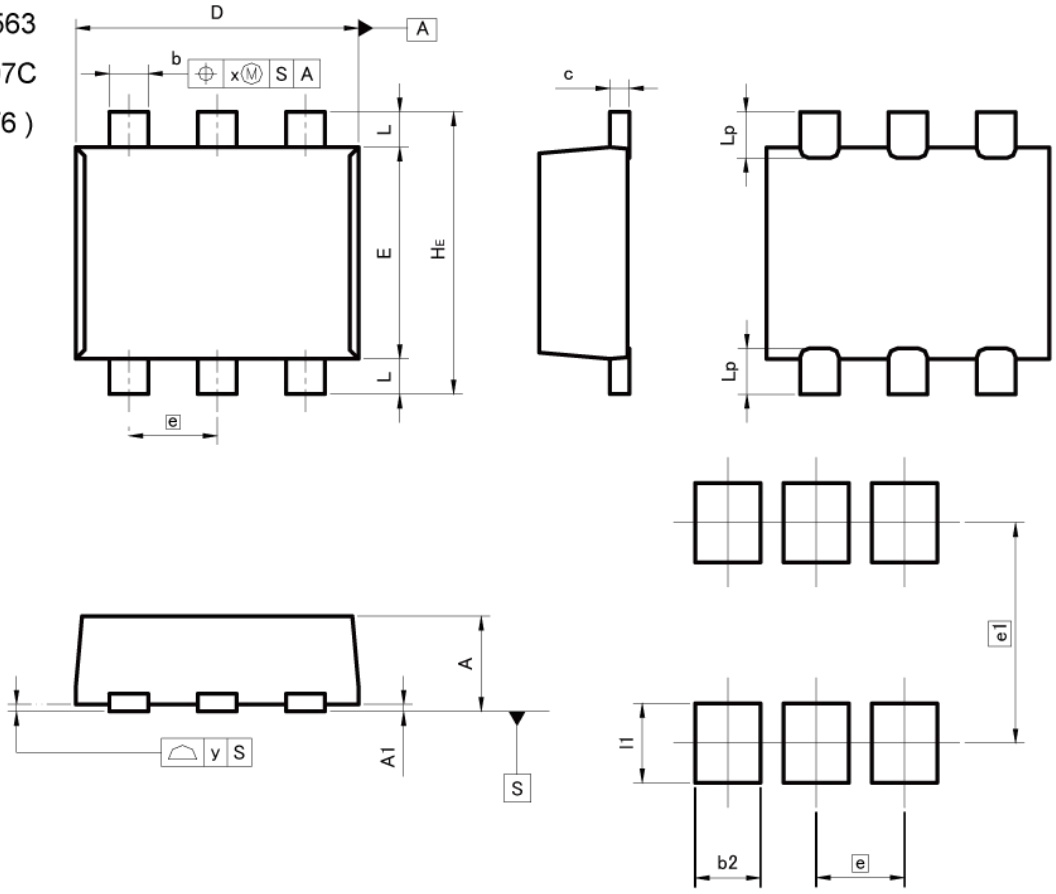


Pattern of terminal position areas
[Not a pattern of soldering pads]

| DIM | MILIMETERS | | INCHES | |
|---|---|---|---|---|
| | MIN | MAX | MIN | MAX |
| A | 0.45 | 0.55 | 0.018 | 0.022 |
| A1 | 0.00 | 0.10 | 0.000 | 0.004 |
| b | 0.17 | 0.27 | 0.007 | 0.011 |
| c | 0.08 | 0.18 | 0.003 | 0.007 |
| D | 1.50 | 1.70 | 0.059 | 0.067 |
| E | 1.10 | 1.30 | 0.043 | 0.051 |
| e | 0.50 | | 0.020 | |
| HE | 1.50 | 1.70 | 0.059 | 0.067 |
| L | 0.10 | 0.30 | 0.004 | 0.012 |
| Lp | – | 0.35 | – | 0.014 |
| x | – | 0.10 | – | 0.004 |
| y | – | 0.10 | – | 0.004 |


| DIM | MILIMETERS | | INCHES | |
|---|---|---|---|---|
| | MIN | MAX | MIN | MAX |
| b2 | – | 0.37 | – | 0.015 |
| e1 | 1.25 | | 0.049 | |
| l1 | – | 0.45 | – | 0.018 |

Dimension in mm/inches


© 2015 ROHM Co., Ltd. All rights reserved.


Downloaded from Arrow.com.

## ●Dimensions

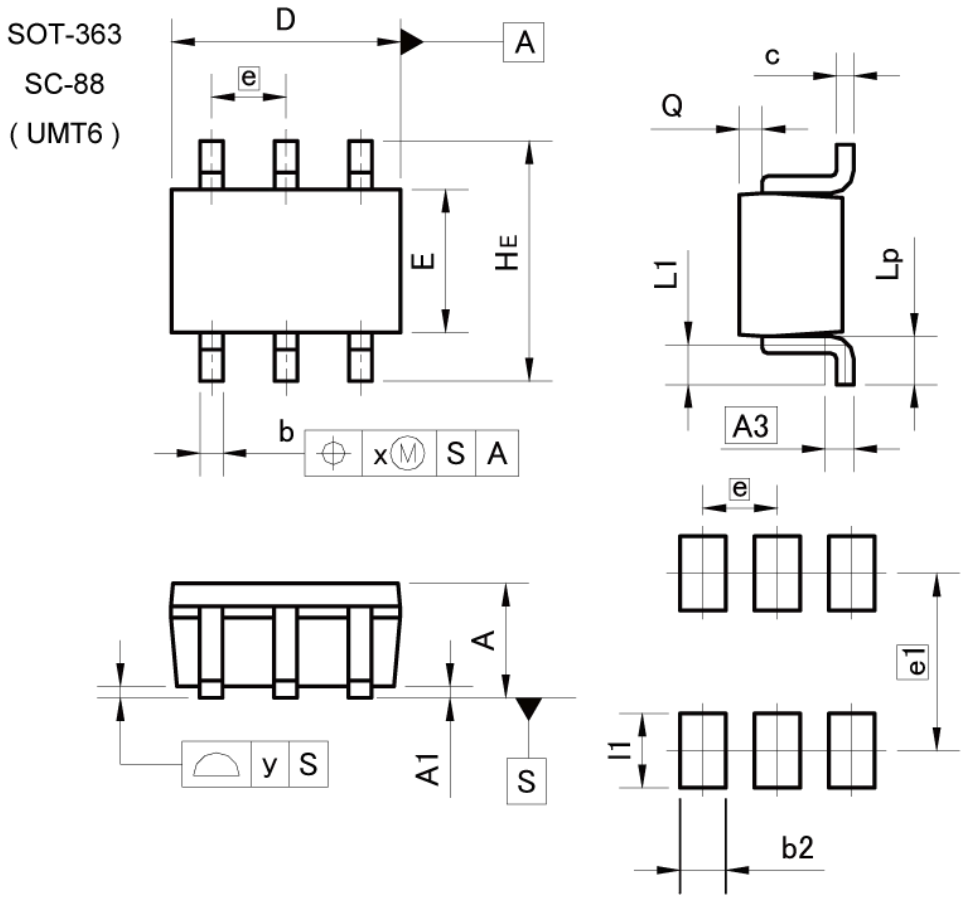


| DIM | MILIMETERS | | INCHES | |
|---|---|---|---|---|
| | MIN | MAX | MIN | MAX |
| A | 0.80 | 1.00 | 0.031 | 0.039 |
| A1 | 0.00 | 0.10 | 0.000 | 0.004 |
| A3 | 0.25 | | 0.010 | |
| b | 0.15 | 0.30 | 0.006 | 0.012 |
| c | 0.10 | 0.20 | 0.004 | 0.008 |
| D | 1.90 | 2.10 | 0.075 | 0.083 |
| E | 1.15 | 1.35 | 0.045 | 0.053 |
| e | 0.65 | | 0.026 | |
| HE | 2.00 | 2.20 | 0.079 | 0.087 |
| L1 | 0.20 | 0.50 | 0.008 | 0.020 |
| Lp | 0.25 | 0.55 | 0.010 | 0.022 |
| Q | 0.10 | 0.30 | 0.004 | 0.012 |
| x | – | 0.10 | – | 0.004 |
| y | – | 0.10 | – | 0.004 |

| DIM | MILIMETERS | | INCHES | |
|---|---|---|---|---|
| | MIN | MAX | MIN | MAX |
| b2 | – | 0.40 | – | 0.016 |
| e1 | 1.55 | | 0.061 | |
| l1 | – | 0.65 | – | 0.026 |


Dimension in mm/inches


© 2015 ROHM Co., Ltd. All rights reserved.


Downloaded from Arrow.com.

## ●Dimensions

SOT-457
SC-74
( SMT6 )

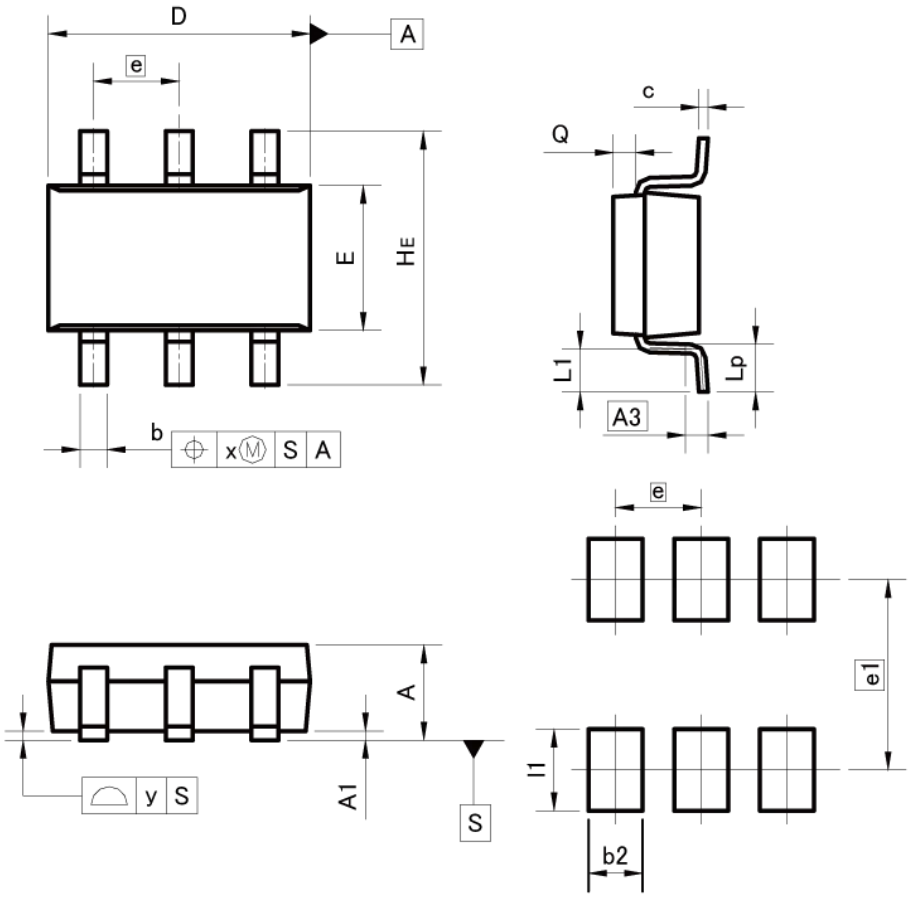


Pattern of terminal position areas
[Not a pattern of soldering pads]

| DIM | MILIMETERS | | INCHES | |
|---|---|---|---|---|
| | MIN | MAX | MIN | MAX |
| A | 1.00 | 1.30 | 0.039 | 0.051 |
| A1 | 0.00 | 0.10 | 0.000 | 0.004 |
| A3 | 0.25 | | 0.010 | |
| b | 0.25 | 0.40 | 0.010 | 0.016 |
| c | 0.09 | 0.25 | 0.004 | 0.010 |
| D | 2.80 | 3.00 | 0.110 | 0.118 |
| E | 1.50 | 1.80 | 0.059 | 0.071 |
| e | 0.95 | | 0.037 | |
| HE | 2.60 | 3.00 | 0.102 | 0.118 |
| L1 | 0.30 | 0.60 | 0.012 | 0.024 |
| Lp | 0.40 | 0.70 | 0.016 | 0.028 |
| Q | 0.20 | 0.30 | 0.008 | 0.012 |
| x | – | 0.20 | – | 0.008 |
| y | – | 0.10 | – | 0.004 |

| DIM | MILIMETERS | | INCHES | |
|---|---|---|---|---|
| | MIN | MAX | MIN | MAX |
| b2 | | 0.60 | – | 0.024 |
| e1 | 2.10 | | 0.083 | |
| l1 | – | 0.90 | – | 0.035 |

Dimension in mm/inches


© 2015 ROHM Co., Ltd. All rights reserved.


Downloaded from Arrow.com.

## Notes

1) The information contained herein is subject to change without notice.

2) Before you use our Products, please contact our sales representative and verify the latest specifications :

3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.
Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Poducts beyond the rating specified by ROHM.

4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.

6) The Products are intended for use in general electronic equipment (i.e. AV/OA devices, communication, consumer systems, gaming/entertainment sets) as well as the applications indicated in this document.

7) The Products specified in this document are not designed to be radiation tolerant.

8) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.

9) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.

10) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.

11) ROHM has used reasonable care to ensur the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.

12) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.

13) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.

14) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.

ROHM SEMICONDUCTOR

Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/


© 2015 ROHM Co., Ltd. All rights reserved.


Downloaded from Arrow.com.

# Notice

## Precaution on using ROHM Products

1. Our Products are designed and manufactured for application in ordinary electronic equipments (such as AV equipment, OA equipment, telecommunication equipment, home electronic appliances, amusement equipment, etc.). If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment (Note 1), transport equipment, traffic equipment, aircraft/spacecraft, nuclear power controllers, fuel controllers, car equipment including car accessories, safety devices, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.

(Note1) Medical Equipment Classification of the Specific Applications

| JAPAN | USA | EU | CHINA |
|---|---|---|---|
| CLASSⅢ | CLASSⅢ | CLASSⅡb | CLASSⅢ |
| CLASSⅣ | | CLASSⅢ | |

2. ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:
   [a] Installation of protection circuits or other protective devices to improve system safety
   [b] Installation of redundant circuits to reduce the impact of single or multiple circuit failure

3. Our Products are designed and manufactured for use under standard conditions and not under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc, prior to use, must be necessary:
   [a] Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
   [b] Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
   [c] Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including $Cl_2$, $H_2S$, $NH_3$, $SO_2$, and $NO_2$
   [d] Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
   [e] Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
   [f] Sealing or coating our Products with resin or other coating materials
   [g] Use of our Products without cleaning residue of flux (even if you use no-clean type fluxes, cleaning residue of flux is recommended); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
   [h] Use of the Products in places subject to dew condensation

4. The Products are not subject to radiation-proof design.

5. Please verify and confirm characteristics of the final or mounted products in using the Products.

6. In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse. is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.

7. De-rate Power Dissipation (Pd) depending on Ambient temperature (Ta). When used in sealed area, confirm the actual ambient temperature.

8. Confirm that operation temperature is within the specified range described in the product specification.

9. ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

## Precaution for Mounting / Circuit board design

1. When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.

2. In principle, the reflow soldering method must be used on a surface-mount products, the flow soldering method must be used on a through hole mount products. If the flow soldering method is preferred on a surface-mount products, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification


© 2015 ROHM Co., Ltd. All rights reserved.

Downloaded from Arrow.com.

## Precautions Regarding Application Examples and External Circuits

1. If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.

2. You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

## Precaution for Electrostatic

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of Ionizer, friction prevention and temperature / humidity control).

## Precaution for Storage / Transportation

1. Product performance and soldered connections may deteriorate if the Products are stored in the places where:
   - [a] the Products are exposed to sea winds or corrosive gases, including Cl2, H2S, NH3, SO2, and NO2
   - [b] the temperature or humidity exceeds those recommended by ROHM
   - [c] the Products are exposed to direct sunshine or condensation
   - [d] the Products are exposed to high Electrostatic

2. Even under ROHM recommended storage condition, solderability of products out of recommended storage time period may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is exceeding the recommended storage time period.

3. Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.

4. Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

## Precaution for Product Label

QR code printed on ROHM Products label is for ROHM's internal use only.

## Precaution for Disposition

When disposing Products please dispose them properly using an authorized industry waste company.

## Precaution for Foreign Exchange and Foreign Trade act

Since concerned goods might be fallen under listed items of export control prescribed by Foreign exchange and Foreign trade act, please consult with ROHM in case of export.

## Precaution Regarding Intellectual Property Rights

1. All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data.

2. ROHM shall not have any obligations where the claims, actions or demands arising from the combination of the Products with other articles such as components, circuits, systems or external equipment (including software).

3. No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the Products or the information contained in this document. Provided, however, that ROHM will not assert its intellectual property rights or other rights against you or your customers to the extent necessary to manufacture or sell products containing the Products, subject to the terms and conditions herein.

## Other Precaution

1. This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.

2. The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.

3. In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.

4. The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.


© 2015 ROHM Co., Ltd. All rights reserved.

Downloaded from Arrow.com.

## General Precaution

1. Before you use our Products, you are requested to carefully read this document and fully understand its contents. ROHM shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any ROHM's Products against warning, caution or note contained in this document.

2. All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the latest information with a ROHM sales representative.

3. The information contained in this document is provided on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate and/or error-free. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.


© 2015 ROHM Co., Ltd. All rights reserved.

Downloaded from Arrow.com.