


Crimped MIL Connector Sockets for Discrete Wires

XG5N/XG5N-U


Crimped Sockets for Discrete Wires

Join the MIL Connector Series

- XG5N-U Sockets with OMRON's unique lock enable one-hand insertion with a secure lock.
- Save up to 24% of the space required for the XG4A.

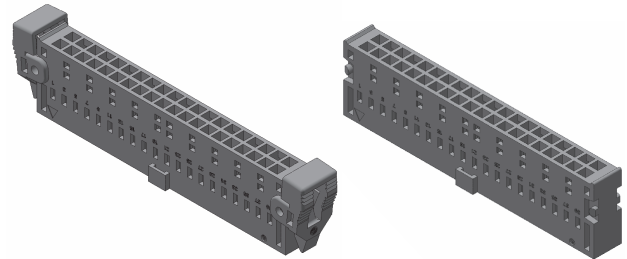

Conceptual Application Diagram

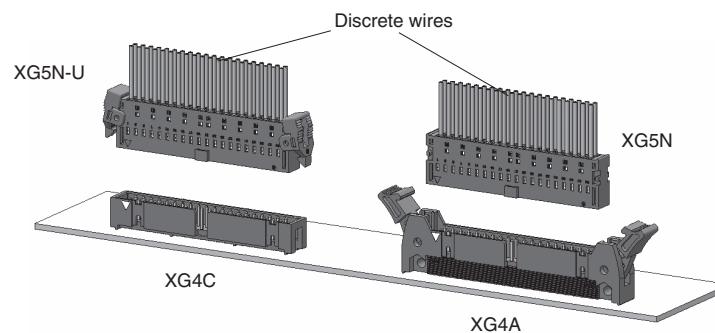

Ratings and Characteristics

Rated current	3 A/contact (with AWG22 wire) 2 A/contact (with AWG24 wire) 1 A/contact (with AWG26 or AWG28 wire)
Rated voltage	250 VAC
Contact resistance	20 mΩ max. (at 20 mV, 100 mA max.)
Insulation resistance	1,000 MΩ min. (at 500 V DC)
Withstand voltage	500 VAC for 60 s (leakage current: 1 mA max.)
Total insertion force	No. of contacts × 1.96 N max.
Individual pull-out force	0.29 N min.
Insertion durability	50 times
Ambient operating temperature	–55 to 105°C (with no icing at low temperature)


Applicable Contacts and Wires

Applicable Contacts	Applicable wires	
	AWG No. (UL1007 twisted wires)	Conductor construction (elements/element diameter (mm))
XG5W-0231	22	17/0.16
	24	11/0.16
	26	7/0.16
XG5W-0232	24	11/0.16
	26	7/0.16
	28	7/0.127

Materials and Finish

Housing		Fiber-glass reinforced PBT resin (UL94 V-2)/black
Lock Levers		POM resin (UL94 HB)/black
Contacts	Mating end	Phosphor bronze/nickel base, gold plated (0.15 μm)
	Crimped section	Phosphor bronze/nickel base, tin plated (2.0 μm)


Mating

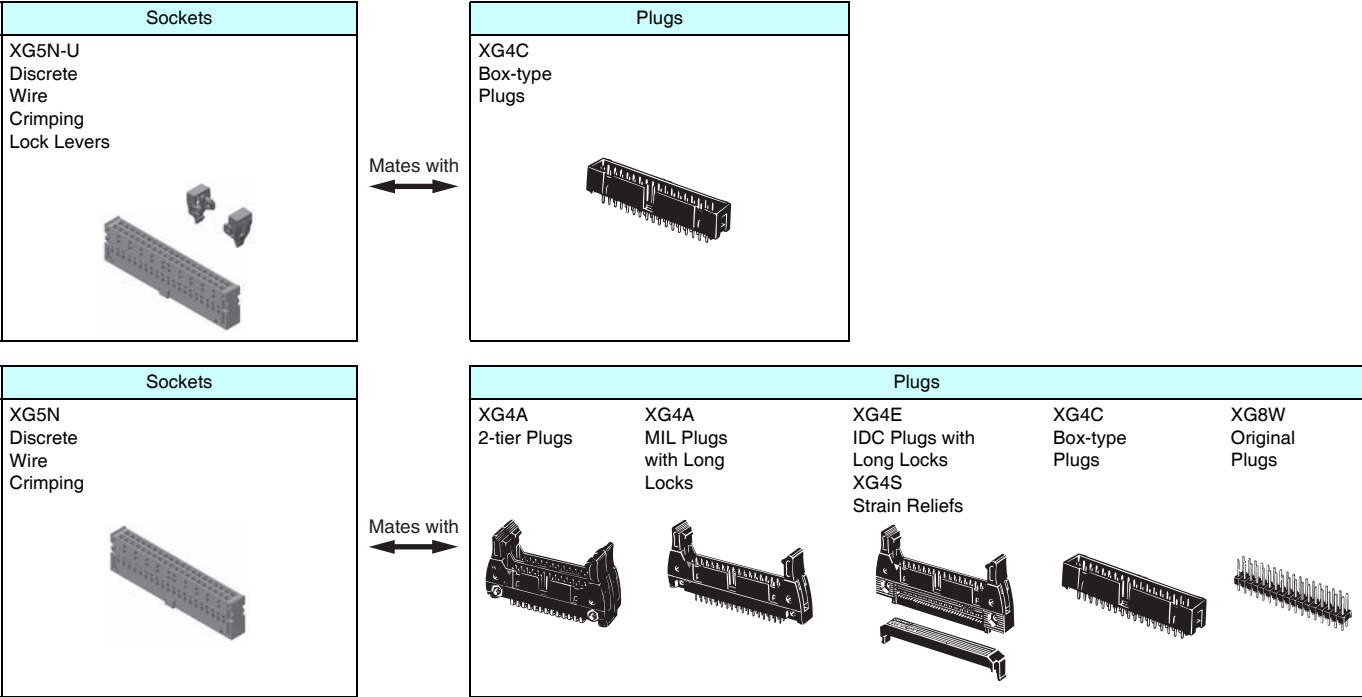

Dimensions


(Unit: mm)

XG5N-U (with Lock Levers Attached)

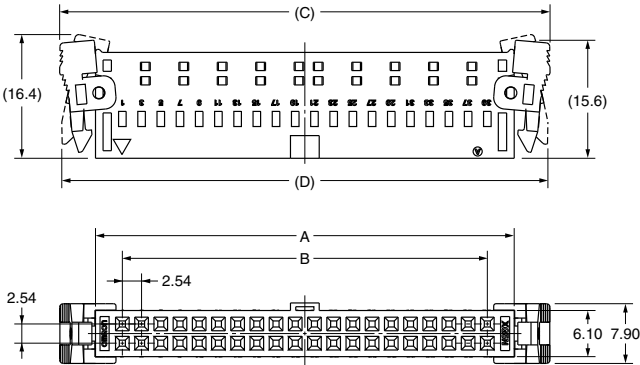




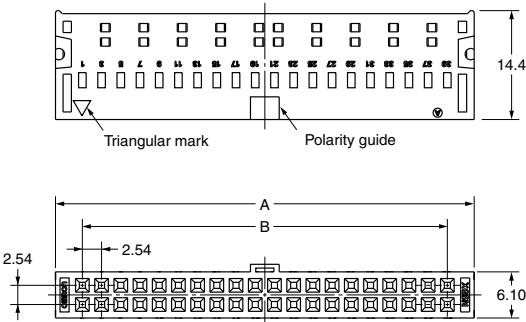

Dimension (mm) No. of contacts	A	B	C	D
10	17.26	10.16	26.80	26.20
14	22.34	15.24	31.88	31.28
16	24.88	17.78	34.42	33.82
20	29.96	22.86	39.50	38.90
26	37.58	30.48	47.12	46.52
30	42.66	35.56	52.20	51.60
34	47.74	40.64	57.28	56.68
40	55.36	48.26	64.90	64.30
50	68.06	60.96	77.60	77.00
60	80.76	73.66	90.30	89.70
64	85.84	78.74	95.38	94.78

XG5N



Ordering Information

Appearance		Socket and Lock Set Note: The Locks and Sockets are provided separately.	Socket Housing	Lock Levers *1	Crimp Contacts, Type 1	Crimp Contacts, Type 2
No. of contacts	No. of polarity guides					
		Model	Model	Model	Model	Model
10	0	XG5N-100-U	XG5N-100	XG5U-0001	XG5W-0231 (loose contacts)	XG5W-0232 (loose contacts)
	1	XG5N-101-U	XG5N-101			
14	1	XG5N-141-U	XG5N-141			
16	1	XG5N-161-U	XG5N-161			
20	1	XG5N-201-U	XG5N-201			
26	1	XG5N-261-U	XG5N-261			
30	1	XG5N-301-U	XG5N-301			
34	1	XG5N-341-U	XG5N-341			
40	1	XG5N-401-U	XG5N-401			
50	1	XG5N-501-U	XG5N-501		XG5W-0231-R *2 (reel contacts)	XG5W-0232-R *2 (reel contacts)
	2	XG5N-502-U	XG5N-502			
60	1	XG5N-601-U	XG5N-601			
	2	XG5N-602-U	XG5N-602			
64	1	XG5N-641-U	XG5N-641			
	2	XG5N-642-U	XG5N-642			

*1. Each XG5N-□□□ Connector requires two Lock Levers.

*2. Order the required number of reels (10,000 contacts).

Note: The pitch between the two polarity guides on Connectors with 50, 60, or 64 contacts is 22.86 mm.

Specified Tools

Manual Crimping Tool

XY2B-7007



Model
XY2B-7007

Contact Removal Tool

XY2E-0003



Model
XY2E-0003

Automatic Applicator

Use an Applicator that is manufactured by Japan Automatic Machine Co., Ltd. Contact information is provided below.

Japan:

Japan Automatic Machine Co., Ltd.

TEL 03-3756-1434

China:

Japan Automatic Machine Technology (Huizhou) Ltd.

6-1-B, Songshan Industrial Park, Huizhou Zhongkai Hi-Tech Industrial Development Zone, Huizhou, Guangdong, China

TEL (86-752) 2771-614 FAX (86-752) 2771-619

South-eastern Asia:

Japan Automatic Machine Singapore Pte. Ltd.

HB Centre 12 Tannery Road #04-02, Singapore 347722

TEL 65-6545-8140 FAX 65-6545-8141

USA, Europe:

Toyojamco, Ltd.

8370 Burnham Road Suite 200 EL Paso, TX 79907 USA

TEL (915) 595-8825 FAX (915) 595-8794

	Crimping Machine	Strip Crimper
Crimp Contacts, Type 1	Planned for the near future. *1	SCA-106700 *2
Crimp Contacts, Type 2		

*1. Inquire for details.

*2. This model number is for standard specifications. Inquire for other specifications.

■ Safety Precautions


● Crimping Method

Always use the specified Crimping Tool or Applicator to wire the crimped contacts.

Refer to the instruction sheet that is provided separately for details.

● Contact Insertion Method

Confirm the orientation of the crimped contacts and then insert them all the way to the back of the Socket. After insertion, confirm that the lances are securely set in the lance holes on the socket housing.

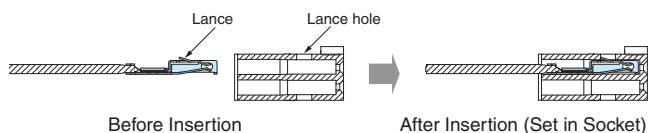

● Contact Replacement Method


To remove contacts that have been incorrectly inserted, always use the XY2E-0003 Contact Removal Tool.

(1) Insert the end of the Removal

Tool into the lance hole in the socket housing and press the lance all the way inside the socket housing.

(2) While pressing in on the lance, pull out the Contact.


(3) Insert a new Contact.



Note: Do not use any Contacts that have been removed.

● Attaching the Lock Levers

Attach the holes in the Lock Levers to the protrusions on both sides of the housing and make sure that they are set securely.

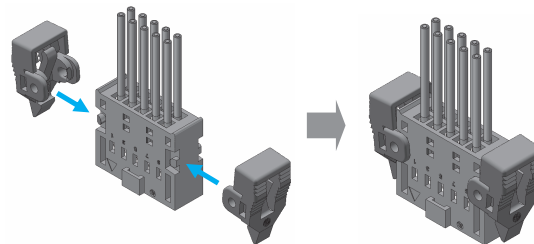

● Precautions for Correct Use

When mating the Sockets with XG4C Box Plugs, always use the XG5U-0001 Lock Levers. Otherwise the Connectors may become disconnected due to vibration or shock.


● Storage

- (1) Do not store the Sockets in locations subject to dust or high humidity.
- (2) Do not store the Sockets in locations close to sources of gases such as ammonia gas or sulfide gas.

■ Approval Standard

The approval rating values for overseas standards are different from the performance values determined individually. Confirm the values before use.

Model	Standard	File No.	Rating
XG5N-100-U	Non Approved Models	---	---
XG5N-□□1-U	Non Approved Models	---	---
XG5N-□□2-U	Non Approved Models	---	---
XG5N-100	UL/C-UL certified product (Recognized)	E103202	200 VAC, 1 A
XG5N-□□1	UL/C-UL certified product (Recognized)	E103202	200 VAC, 1 A
XG5N-□□2	UL/C-UL certified product (Recognized)	E103202	200 VAC, 1 A
XG5U-0001	Non Approved Models	---	---
XG5W-0231	Non Approved Models	---	---
XG5W-0231-R	Non Approved Models	---	---
XG5W-0232	Non Approved Models	---	---
XG5W-0232-R	Non Approved Models	---	---
XY2B-7007	Non Approved Models	---	---
XY2E-0003	Non Approved Models	---	---

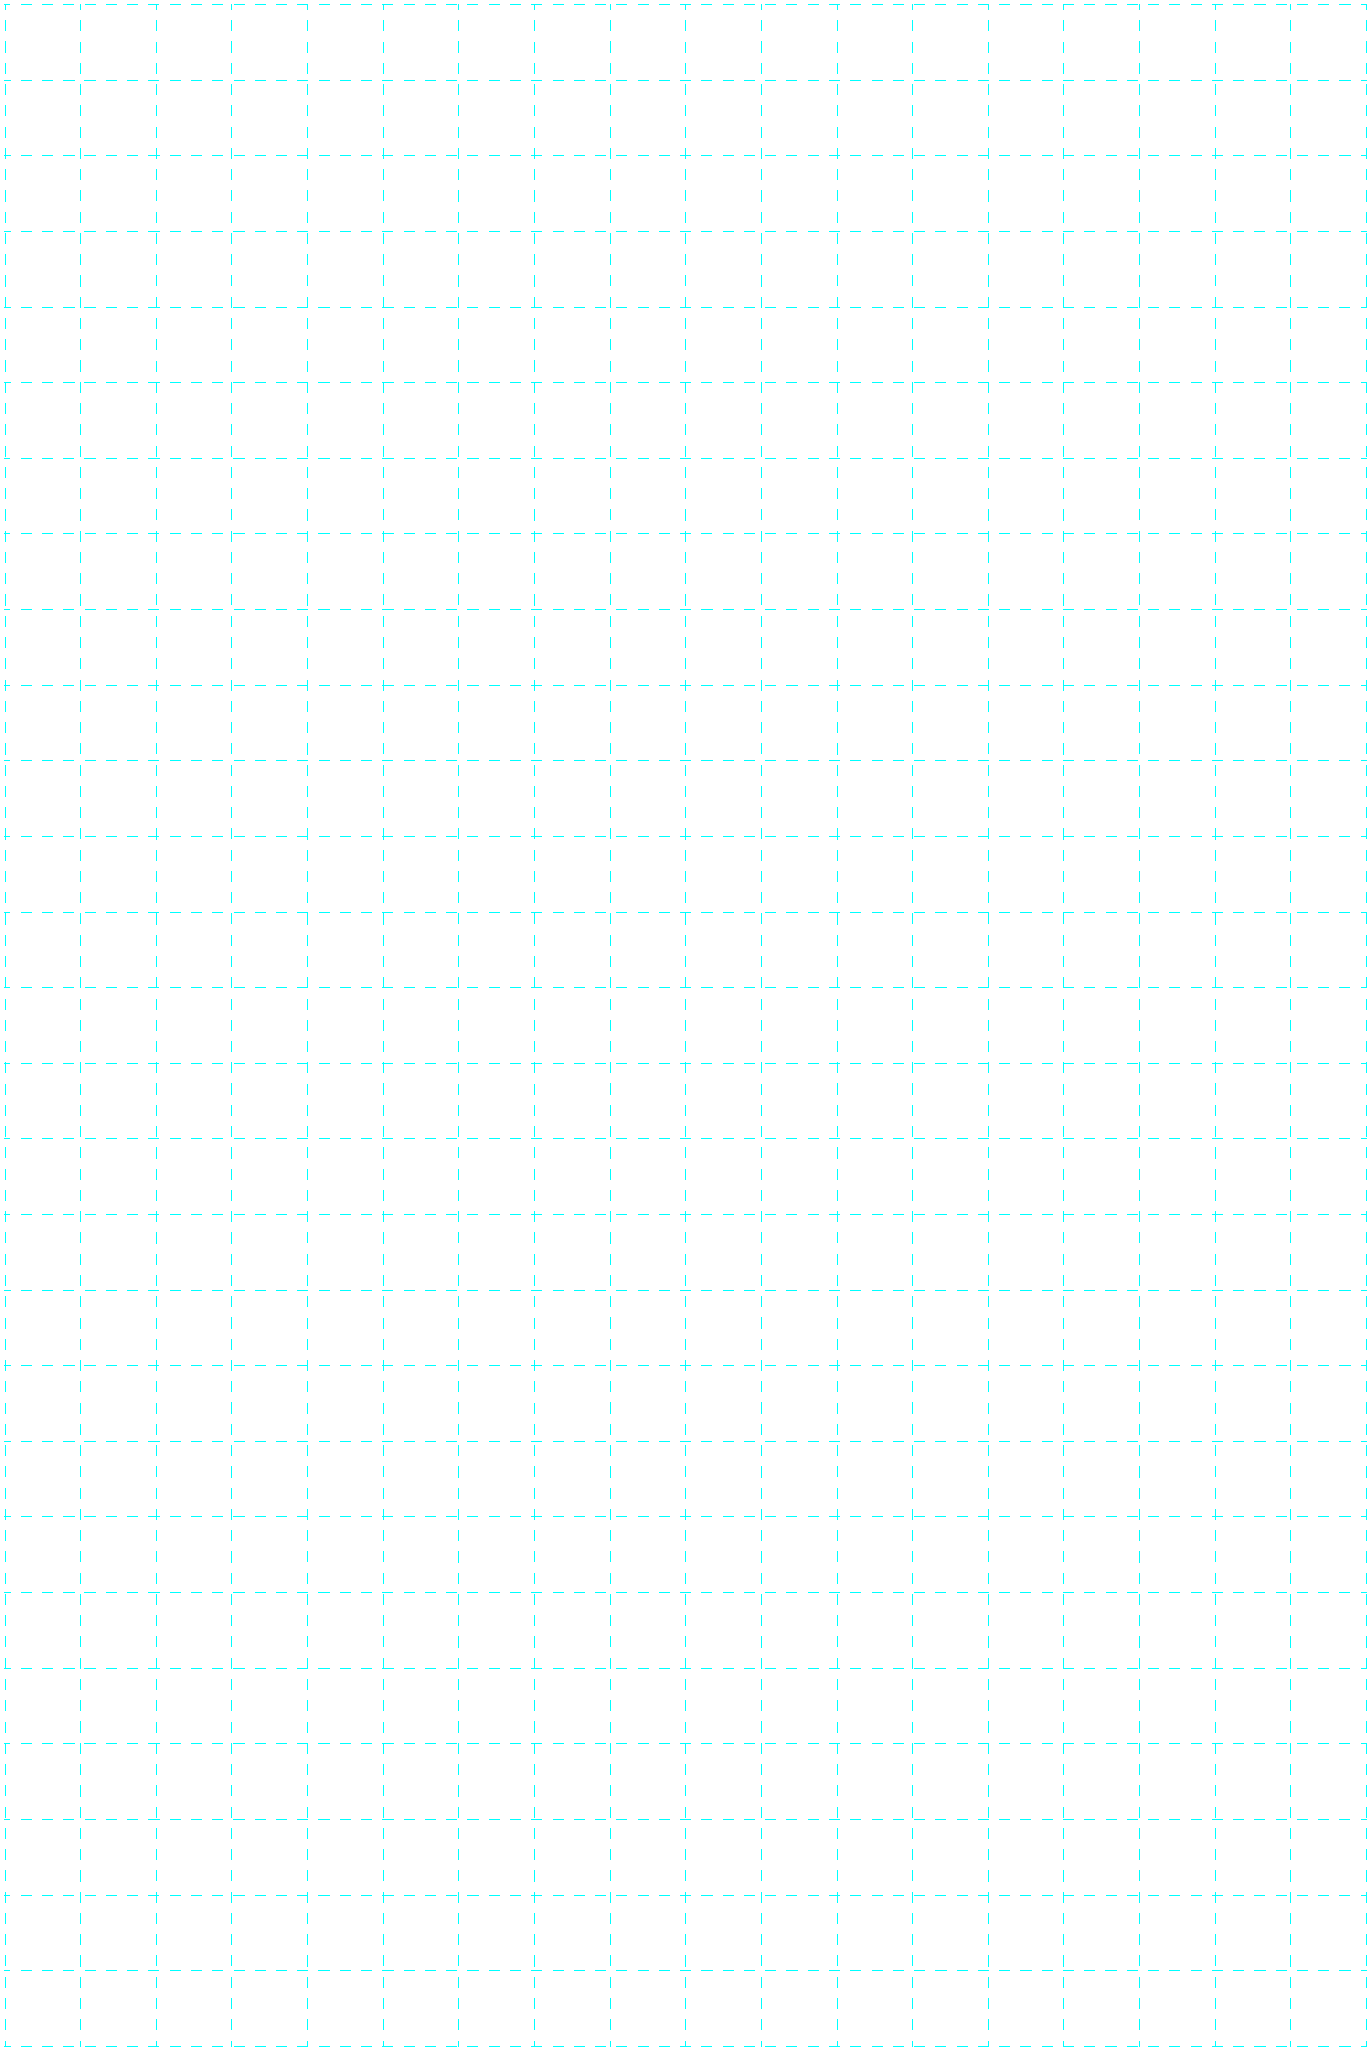

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Device & Module Solutions Company

Regional Contact	
Americas https://components.omron.com/us	Europe https://components.omron.com/eu
Asia-Pacific https://components.omron.com/ap	China https://components.omron.com.cn
Korea https://components.omron.com/kr	Japan https://components.omron.com/jp

© OMRON Corporation 2012-2022 All Rights Reserved.
In the interest of product improvement, specifications are subject to change without notice.