



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

1N914(A)(B)

Features

- Moisture Sensitivity: Level 1 per J-STD-020C
- Low Current Leakage
- Compression Bond Construction
- Low Cost
- Marking : Cathode band and type number
- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 300°C/W Junction To Ambient

Electrical Characteristics @ 25°C Unless Otherwise Specified


Maximum Repetitive Reverse Voltage	V_{RRM}	100V	
Average Rectified Forward Current	I_O	200mA	
Power Dissipation	P_D	500mW	
Junction Temperature	T_J	150°C	
Peak Forward Surge Current	I_{FSM}	1.0A 4.0A	Pulse Width=1.0 second Pulse Width=1.0 microsecond
Minimum Breakdown Voltage	V_R	100V 75V	$I_R=100\mu A$, $I_R=5.0\mu A$
Maximum Instantaneous Forward Voltage	V_F	1.0V 720mV	$T_J = 25^\circ C$ $I_{FM} = 10mA$; $I_{FM} = 20mA$; $I_{FM} = 100mA$; $I_{FM} = 5.0mA$;
Maximum Reverse Current	I_R	25nA 5.0uA 50uA	$V_R=20V$, $T_J=25^\circ C$, $V_R=75V$, $T_J=25^\circ C$, $V_R=20V$, $T_J=150^\circ C$
Typical Junction Capacitance	C_J	4.0pF	Measured at 1.0MHz, $V_R=0V$
Reverse Recovery Time	T_{rr}	4.0nS	$I_F=10mA$ $V_R = 6V$ $R_L=100 \Omega$, $I_{rr}=1.0mA$

*Pulse test: Pulse width 300 usec, Duty cycle 2%

Note: 1. Lead in Glass Exemption Applied, see EU Directive Annex 5.

500mW 100 Volt Silicon Epitaxial Diodes




DO-35

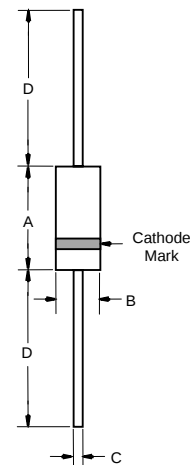

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	---	.166	---	4.2	
B	---	.079	---	2.00	
C	---	.020	---	.52	
D	1.000	---	25.40	---	


www.mccsemi.com

1N914(A)(B)

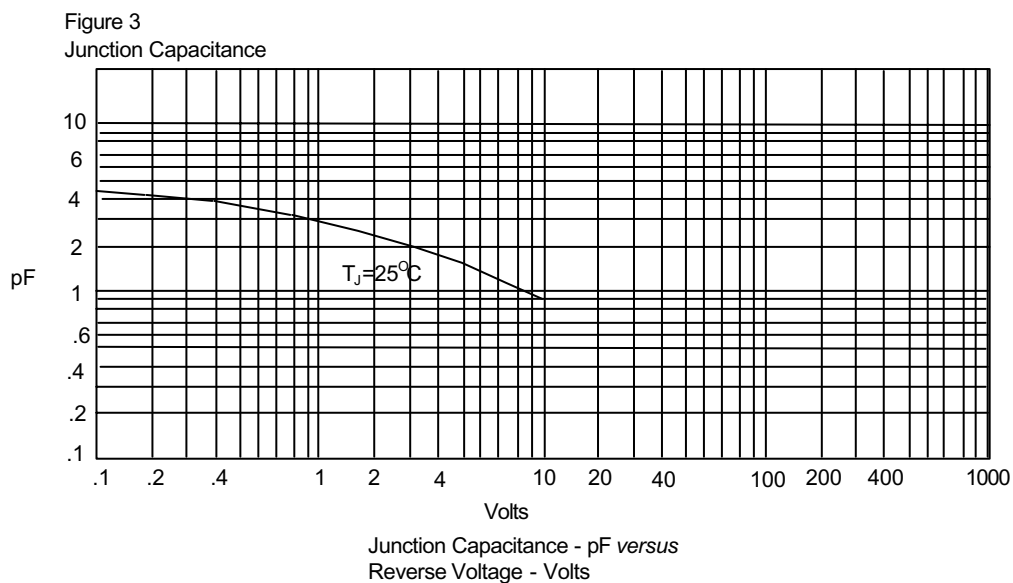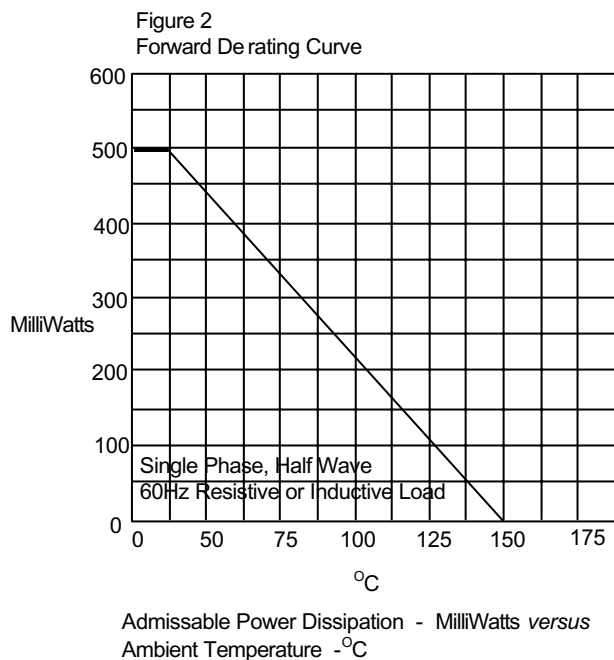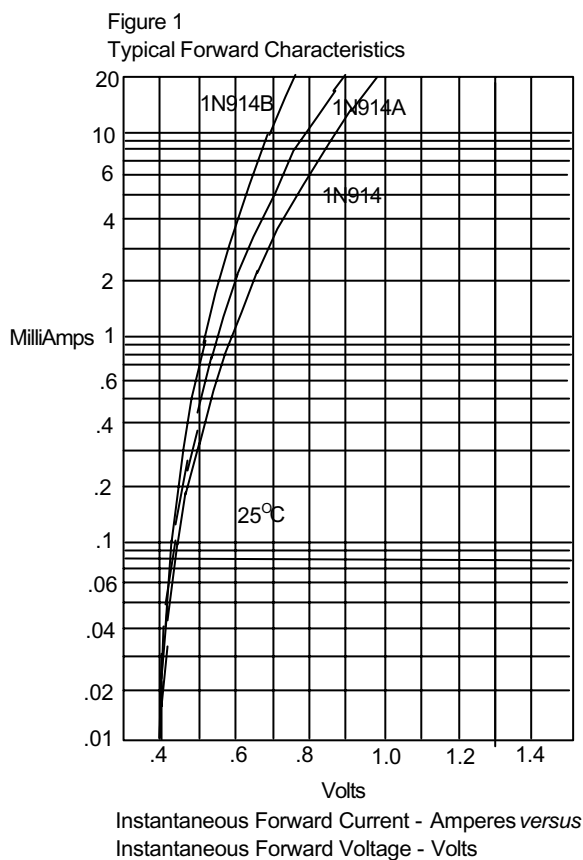


1N914(A)(B)

Figure 4
Typical Reverse Characteristics

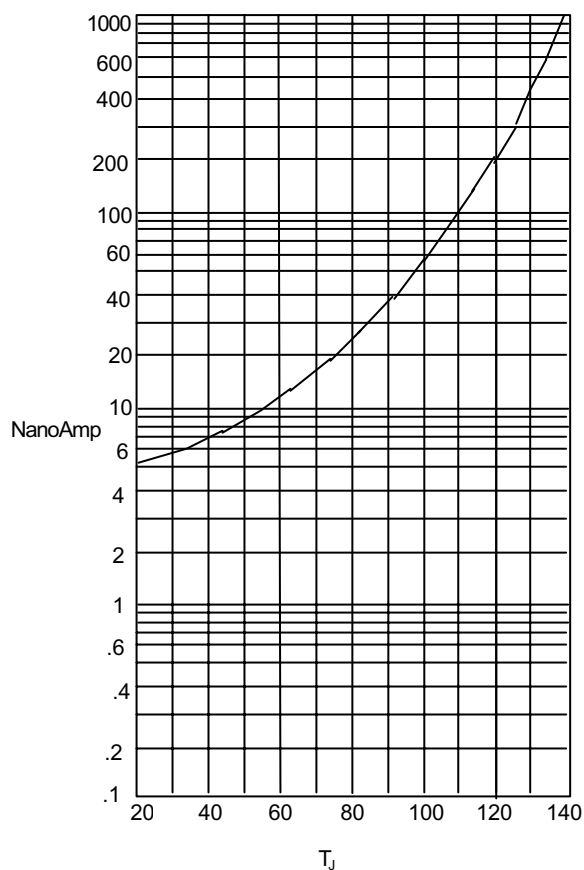

Instantaneous Reverse Leakage Current - NanoAmperes
versus Junction Temperature - $^{\circ}\text{C}$

Figure 5
Peak Forward Surge Current

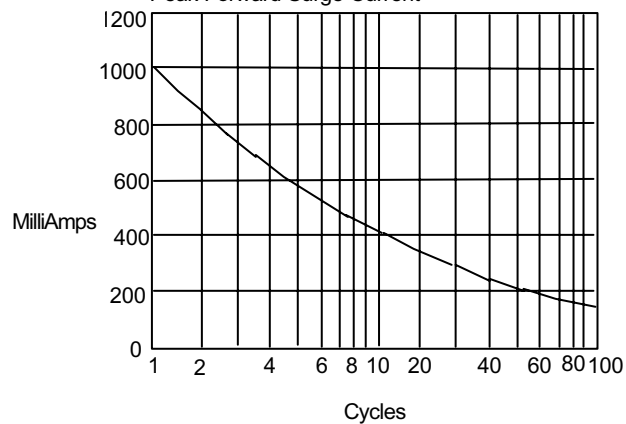

Peak Forward Surge Current - Amperes versus
Number Of Cycles At 60Hz - Cycles

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel; 10Kpcs/Reel
(Part Number)-AP	Ammo Packing;5Kpcs/AmmoBox
(Part Number)-BP	Bulk;500pcs/Bag

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.