



**Part Number :** [15311032](#)


**Product Description :** 4.80mm Pitch Wire-to-Wire Receptacle Housing, 3 Circuits

**Series Number :** 5025

**Status :** Active

**Product Category :** Connector Housings

**Engineering Part Number :** 5025-03R1

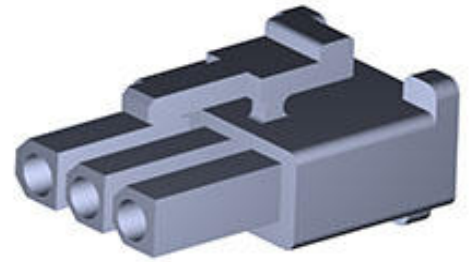

---

## Documents and Resources

### Drawings

[015311032\\_sd.pdf](#)

[SPK-5025-001-001.pdf](#)

### 3D Models and Design Files

[STEP AP242](#)

[SOLIDWORKS](#)

[Creo](#)

### Specifications

[PS-5025-001-001.pdf](#)


[PS-5025-002-001.pdf](#)

[PS-5025-003-001.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	 per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2025)6375-DC (05 Nov 2025)
EU RoHS	Compliant per EU 2015/863

[Compliance Statements](#)

- EU RoHS
- REACH SVHC
- Low-Halogen

#### Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

#### Substances of Interest

- PFAS

#### EU RoHS Certificate of Compliance

#### Additional Product Compliance Information

## Part Details

### General

Status	Active
Category	Connector Housings
Series	5025
Description	4.80mm Pitch Wire-to-Wire Receptacle Housing, 3 Circuits
Application	Power, Wire-to-Wire
Product Name	N/A
UPC	800753622111

### Agency

CSA	LR19980
UL	E29179

### Physical

Circuits (maximum)	3
Flammability	94V-2
Gender	Receptacle
Glow-Wire Capable	No
Net Weight	1550.800/mg
Number of Rows	1
Packaging Type	Bag

Panel Mount	No
Pitch - Mating Interface	4.80mm
Pitch - Termination Interface	4.80mm
Polarized to Mating Part	Yes
Ports	1
Stackable	No
Temperature Range - Operating	-40° to +105°C

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
4.80mm Pitch Wire-to-Wire Plug Housing, 3 Circuits	<u>15311031</u>
4.80mm Pitch Wire-to-Wire Plug Housing, 3 Circuits	<u>15311033</u>

### Use with Part(s)

Description	Part Number
4.80mm Pitch Female Crimp Terminal	<u>5005</u>

---

This document was generated on Dec 25, 2025