

C1608X5R1A105M080AC

Production (NRND)

Product Status Recommended Alternate Part No. : [C1608X5R1C105K080AA](#) (Interchangeability is not guaranteed.)

TDK Item Description C1608X5R1A105MT****


Applications Commercial Grade
Please refer to Part No. [CGA3E2X5R1A105M080AA](#) for Automotive use.

Feature General General (Up to 75V)

Series C1608 [EIA 0603]

Brand TDK

Environmental Compliance



Size	
Length(L)	1.60mm +0.15,-0.10mm
Width(W)	0.80mm +0.15,-0.10mm
Thickness(T)	0.80mm +0.15,-0.10mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	0.30mm Min.
Recommended Land Pattern (PA)	0.70mm to 1.00mm(Flow Soldering)
	0.60mm to 0.80mm(Reflow Soldering)
Recommended Land Pattern (PB)	0.80mm to 1.00mm(Flow Soldering)
	0.60mm to 0.80mm(Reflow Soldering)
Recommended Land Pattern (PC)	0.60mm to 0.80mm(Flow Soldering)
	0.60mm to 0.80mm(Reflow Soldering)







Electrical Characteristics	
Capacitance	1μF ±20%
Rated Voltage	10VDC
Temperature Characteristic	X5R(±15%)
Dissipation Factor (Max.)	5%
Insulation Resistance (Min.)	100MΩ

Other	
Operating Temp. Range	-55 to 85°C
Soldering Method	Wave (Flow)
	Reflow
AEC-Q200	NO
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000pcs

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

C1608X5R1A105M080AC

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

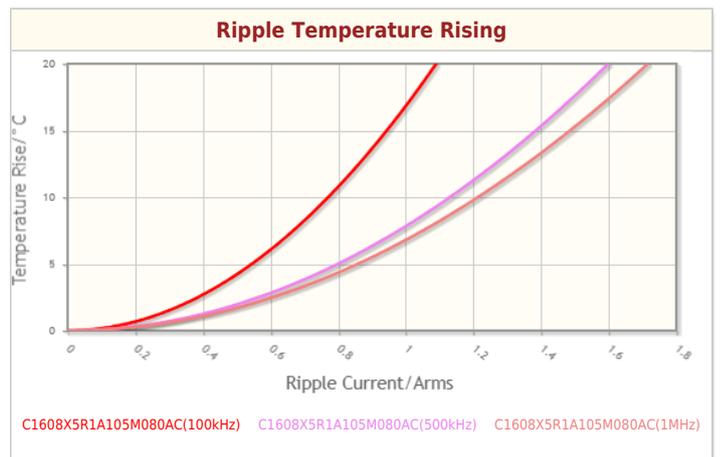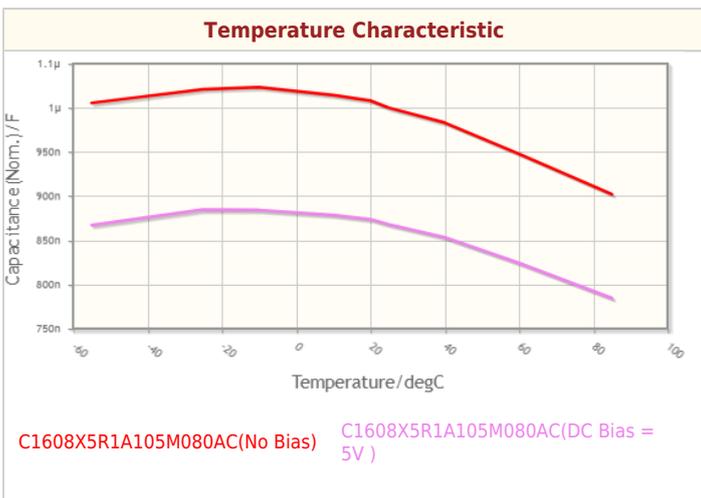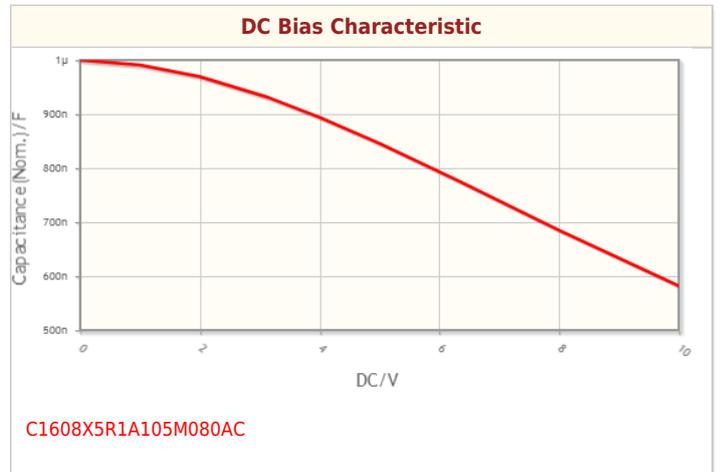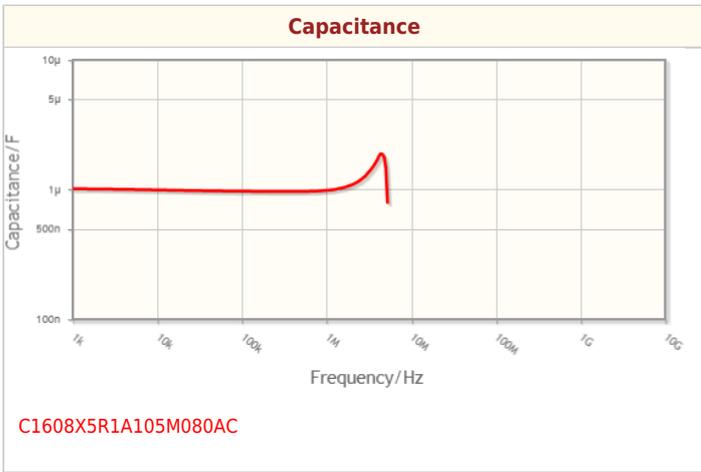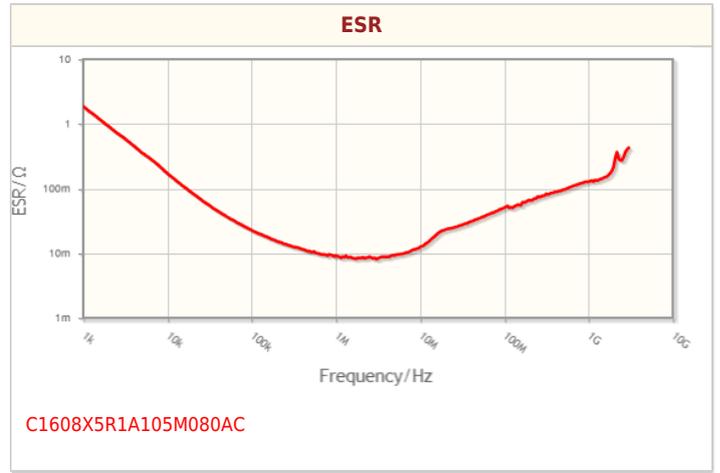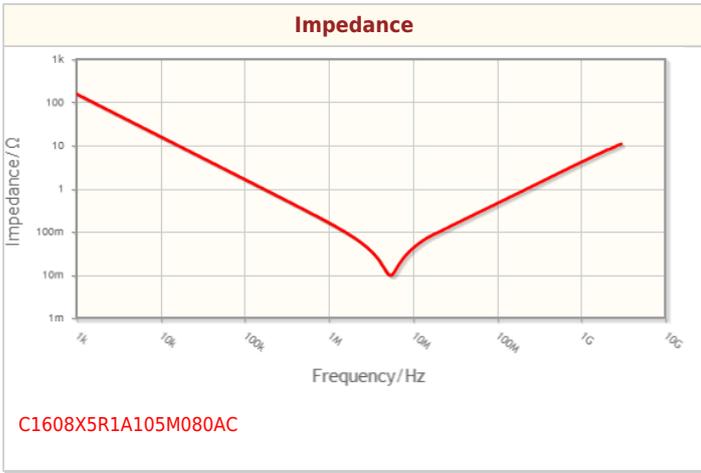

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

Associated Images

