

Thyristor Module

$$V_{RRM} = 2 \times 1200 \text{ V}$$


$$I_{TAV} = 60 \text{ A}$$

$$V_T = 1,24 \text{ V}$$

Phase leg


Part number

MCC56-12io8B

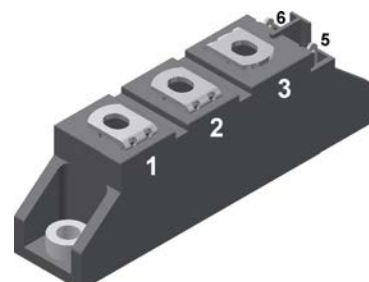

Backside: isolated

 E72873

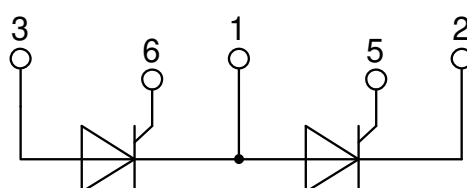

Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability
- Direct Copper Bonded Al₂O₃-ceramic

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: TO-240AA


- Isolation Voltage: 4800 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Thyristor				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1300	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1200	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 1200\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			200	μA
		$V_{R/D} = 1200\text{ V}$	$T_{VJ} = 125^{\circ}\text{C}$			5	mA
V_T	forward voltage drop	$I_T = 100\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			1,26	V
		$I_T = 200\text{ A}$				1,57	V
		$I_T = 100\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$			1,24	V
		$I_T = 200\text{ A}$				1,62	V
I_{TAV}	average forward current	$T_C = 85^{\circ}\text{C}$	$T_{VJ} = 125^{\circ}\text{C}$			60	A
$I_{T(RMS)}$	RMS forward current	180° sine				94	A
V_{T0}	threshold voltage	} for power loss calculation only	$T_{VJ} = 125^{\circ}\text{C}$			0,85	V
r_T	slope resistance					3,7	m Ω
R_{thJC}	thermal resistance junction to case					0,45	K/W
R_{thCH}	thermal resistance case to heatsink				0,2		K/W
P_{tot}	total power dissipation		$T_C = 25^{\circ}\text{C}$			222	W
I_{TSM}	max. forward surge current	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			1,50	kA
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			1,62	kA
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 125^{\circ}\text{C}$			1,28	kA
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			1,38	kA
I^2t	value for fusing	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			11,3	kA ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			10,9	kA ² s
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 125^{\circ}\text{C}$			8,13	kA ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			7,87	kA ² s
C_J	junction capacitance	$V_R = 400\text{ V}$ $f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		74		pF
P_{GM}	max. gate power dissipation	$t_p = 30\text{ }\mu\text{s}$	$T_C = 125^{\circ}\text{C}$			10	W
		$t_p = 300\text{ }\mu\text{s}$				5	W
P_{GAV}	average gate power dissipation					0,5	W
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 125^{\circ}\text{C}; f = 50\text{ Hz}$ repetitive, $I_T = 150\text{ A}$				150	A/ μs
		$t_p = 200\text{ }\mu\text{s}; di_G/dt = 0,45\text{ A}/\mu\text{s};$ $I_G = 0,45\text{ A}; V_D = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 60\text{ A}$				500	A/ μs
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V_D = \frac{2}{3} V_{DRM}$ $T_{VJ} = 125^{\circ}\text{C}$ $R_{GK} = \infty$; method 1 (linear voltage rise)				1000	V/ μs
V_{GT}	gate trigger voltage	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			1,5	V
			$T_{VJ} = -40^{\circ}\text{C}$			1,6	V
I_{GT}	gate trigger current	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			100	mA
			$T_{VJ} = -40^{\circ}\text{C}$			200	mA
V_{GD}	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 125^{\circ}\text{C}$			0,2	V
I_{GD}	gate non-trigger current					10	mA
I_L	latching current	$t_p = 10\text{ }\mu\text{s}$	$T_{VJ} = 25^{\circ}\text{C}$			450	mA
		$I_G = 0,45\text{ A}; di_G/dt = 0,45\text{ A}/\mu\text{s}$					
I_H	holding current	$V_D = 6\text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^{\circ}\text{C}$			200	mA
t_{gd}	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$	$T_{VJ} = 25^{\circ}\text{C}$			2	μs
		$I_G = 0,45\text{ A}; di_G/dt = 0,45\text{ A}/\mu\text{s}$					
t_q	turn-off time	$V_R = 100\text{ V}; I_T = 150\text{ A}; V_D = \frac{2}{3} V_{DRM}$ $T_{VJ} = 100^{\circ}\text{C}$ $di/dt = 10\text{ A}/\mu\text{s}; dv/dt = 20\text{ V}/\mu\text{s}; t_p = 200\text{ }\mu\text{s}$			150		μs

Package TO-240AA				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I _{RMS}	RMS current	per terminal				200	A
T _{VJ}	virtual junction temperature			-40		125	°C
T _{op}	operation temperature			-40		100	°C
T _{stg}	storage temperature			-40		125	°C
Weight					81		g
M _D	mounting torque			2,5		4	Nm
M _T	terminal torque			2,5		4	Nm
d _{Spp/App}	creepage distance on surface striking distance through air	terminal to terminal	13,0	9,7			mm
d _{Spb/Apb}		terminal to backside	16,0	16,0			mm
V _{ISOL}	isolation voltage	t = 1 second	50/60 Hz, RMS; I _{ISOL} ≤ 1 mA		4800		V
		t = 1 minute			4000		V

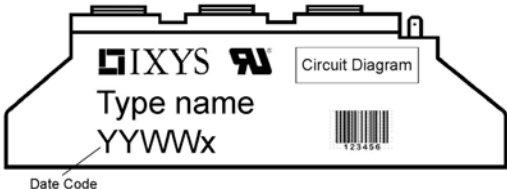


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MCC56-12io8B	MCC56-12io8B	Box	36	457574

Similar Part	Package	Voltage class
MCMA65P1200TA	TO-240AA-1B	1200
MCMA85P1200TA	TO-240AA-1B	1200

Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 125^{\circ}\text{C}$



Thyristor

$V_{0\text{ max}}$

threshold voltage

0,85

V

$R_{0\text{ max}}$

*slope resistance **

2,5

mΩ


Side View Dimensions:

- Overall Width: 64×19 mm
- Total Height: 30 ± 0.5 mm
- Offset from Base: 28.1 ± 0.5 mm
- Top Flange Thickness: 3.5 ± 0.3 mm
- Bottom Flange Thickness: $7.6^{+0.4}_{-0.1}$ mm
- Base Offset: 23.5 ± 0.5 mm
- Overall Depth: 29.7 ± 0.3 mm
- Surface Finish: *typ. 9*
- Material: A 2.8 - 0.8 DIN 46244

Front View Dimensions:

- Overall Length: 92 ± 0.5 mm
- Internal Length: 80 ± 0.5 mm
- Feature 1 Diameter: 20.8 ± 0.25 mm
- Feature 1 Offset: 14.8 ± 0.3 mm
- Feature 1 Hole Diameter: 10 ± 0.1 mm
- Feature 1 Mounting Tab: 5.5 ± 0.1 mm
- Feature 2 Diameter: 10 ± 0.5 mm
- Feature 3 Diameter: 25 ± 0.3 mm
- Feature 4 Diameter: 45 ± 0.3 mm
- Feature 5 Diameter: 65 ± 0.3 mm
- Feature 6 Diameter: 6 ± 0.3 mm
- Feature 7 Diameter: 6.9 ± 0.3 mm
- Feature 8 Diameter: 6.9 ± 0.3 mm
- Feature 9 Diameter: 6.9 ± 0.3 mm
- Feature 10 Diameter: 6.9 ± 0.3 mm
- Feature 11 Diameter: 6.9 ± 0.3 mm
- Feature 12 Diameter: 6.9 ± 0.3 mm
- Feature 13 Diameter: 6.9 ± 0.3 mm
- Feature 14 Diameter: 6.9 ± 0.3 mm
- Feature 15 Diameter: 6.9 ± 0.3 mm
- Feature 16 Diameter: 6.9 ± 0.3 mm
- Feature 17 Diameter: 6.9 ± 0.3 mm
- Feature 18 Diameter: 6.9 ± 0.3 mm
- Feature 19 Diameter: 6.9 ± 0.3 mm
- Feature 20 Diameter: 6.9 ± 0.3 mm
- Feature 21 Diameter: 6.9 ± 0.3 mm
- Feature 22 Diameter: 6.9 ± 0.3 mm
- Feature 23 Diameter: 6.9 ± 0.3 mm
- Feature 24 Diameter: 6.9 ± 0.3 mm
- Feature 25 Diameter: 6.9 ± 0.3 mm
- Feature 26 Diameter: 6.9 ± 0.3 mm
- Feature 27 Diameter: 6.9 ± 0.3 mm
- Feature 28 Diameter: 6.9 ± 0.3 mm
- Feature 29 Diameter: 6.9 ± 0.3 mm
- Feature 30 Diameter: 6.9 ± 0.3 mm
- Feature 31 Diameter: 6.9 ± 0.3 mm
- Feature 32 Diameter: 6.9 ± 0.3 mm
- Feature 33 Diameter: 6.9 ± 0.3 mm
- Feature 34 Diameter: 6.9 ± 0.3 mm
- Feature 35 Diameter: 6.9 ± 0.3 mm
- Feature 36 Diameter: 6.9 ± 0.3 mm
- Feature 37 Diameter: 6.9 ± 0.3 mm
- Feature 38 Diameter: 6.9 ± 0.3 mm
- Feature 39 Diameter: 6.9 ± 0.3 mm
- Feature 40 Diameter: 6.9 ± 0.3 mm
- Feature 41 Diameter: 6.9 ± 0.3 mm
- Feature 42 Diameter: 6.9 ± 0.3 mm
- Feature 43 Diameter: 6.9 ± 0.3 mm
- Feature 44 Diameter: 6.9 ± 0.3 mm
- Feature 45 Diameter: 6.9 ± 0.3 mm
- Feature 46 Diameter: 6.9 ± 0.3 mm
- Feature 47 Diameter: 6.9 ± 0.3 mm
- Feature 48 Diameter: 6.9 ± 0.3 mm
- Feature 49 Diameter: 6.9 ± 0.3 mm
- Feature 50 Diameter: 6.9 ± 0.3 mm
- Feature 51 Diameter: 6.9 ± 0.3 mm
- Feature 52 Diameter: 6.9 ± 0.3 mm
- Feature 53 Diameter: 6.9 ± 0.3 mm
- Feature 54 Diameter: 6.9 ± 0.3 mm
- Feature 55 Diameter: 6.9 ± 0.3 mm
- Feature 56 Diameter: 6.9 ± 0.3 mm
- Feature 57 Diameter: 6.9 ± 0.3 mm
- Feature 58 Diameter: 6.9 ± 0.3 mm
- Feature 59 Diameter: 6.9 ± 0.3 mm
- Feature 60 Diameter: 6.9 ± 0.3 mm
- Feature 61 Diameter: 6.9 ± 0.3 mm
- Feature 62 Diameter: 6.9 ± 0.3 mm
- Feature 63 Diameter: 6.9 ± 0.3 mm
- Feature 64 Diameter: 6.9 ± 0.3 mm
- Feature 65 Diameter: 6.9 ± 0.3 mm
- Feature 66 Diameter: 6.9 ± 0.3 mm
- Feature 67 Diameter: 6.9 ± 0.3 mm
- Feature 68 Diameter: 6.9 ± 0.3 mm
- Feature 69 Diameter: 6.9 ± 0.3 mm
- Feature 70 Diameter: 6.9 ± 0.3 mm
- Feature 71 Diameter: 6.9 ± 0.3 mm
- Feature 72 Diameter: 6.9 ± 0.3 mm
- Feature 73 Diameter: 6.9 ± 0.3 mm
- Feature 74 Diameter: 6.9 ± 0.3 mm
- Feature 75 Diameter: 6.9 ± 0.3 mm
- Feature 76 Diameter: 6.9 ± 0.3 mm
- Feature 77 Diameter: 6.9 ± 0.3 mm
- Feature 78 Diameter: 6.9 ± 0.3 mm
- Feature 79 Diameter: 6.9 ± 0.3 mm
- Feature 80 Diameter: 6.9 ± 0.3 mm
- Feature 81 Diameter: 6.9 ± 0.3 mm
- Feature 82 Diameter: 6.9 ± 0.3 mm
- Feature 83 Diameter: 6.9 ± 0.3 mm
- Feature 84 Diameter: 6.9 ± 0.3 mm
- Feature 85 Diameter: 6.9 ± 0.3 mm
- Feature 86 Diameter: 6.9 ± 0.3 mm
- Feature 87 Diameter: 6.9 ± 0.3 mm
- Feature 88 Diameter: 6.9 ± 0.3 mm
- Feature 89 Diameter: 6.9 ± 0.3 mm
- Feature 90 Diameter: 6.9 ± 0.3 mm
- Feature 91 Diameter: 6.9 ± 0.3 mm
- Feature 92 Diameter: 6.9 ± 0.3 mm
- Feature 93 Diameter: 6.9 ± 0.3 mm
- Feature 94 Diameter: 6.9 ± 0.3 mm
- Feature 95 Diameter: 6.9 ± 0.3 mm
- Feature 96 Diameter: 6.9 ± 0.3 mm
- Feature 97 Diameter: 6.9 ± 0.3 mm
- Feature 98 Diameter: 6.9 ± 0.3 mm
- Feature 99 Diameter: 6.9 ± 0.3 mm
- Feature 100 Diameter: 6.9 ± 0.3 mm
- Feature 101 Diameter: 6.9 ± 0.3 mm
- Feature 102 Diameter: 6.9 ± 0.3 mm
- Feature 103 Diameter: 6.9 ± 0.3 mm
- Feature 104 Diameter: 6.9 ± 0.3 mm
- Feature 105 Diameter: 6.9 ± 0.3 mm
- Feature 106 Diameter: 6.9 ± 0.3 mm
- Feature 107 Diameter: 6.9 ± 0.3 mm
- Feature 108 Diameter: 6.9 ± 0.3 mm
- Feature 109 Diameter: 6.9 ± 0.3 mm
- Feature 110 Diameter: 6.9 ± 0.3 mm
- Feature 111 Diameter: 6.9 ± 0.3 mm
- Feature 112 Diameter: 6.9 ± 0.3 mm
- Feature 113 Diameter: 6.9 ± 0.3 mm
- Feature 114 Diameter: 6.9 ± 0.3 mm
- Feature 115 Diameter: 6.9 ± 0.3 mm
- Feature 116 Diameter: 6.9 ± 0.3 mm
- Feature 117 Diameter: 6.9 ± 0.3 mm
- Feature 118 Diameter: 6.9 ± 0.3 mm
- Feature 119 Diameter: 6.9 ± 0.3 mm
- Feature 120 Diameter: 6.9 ± 0.3 mm
- Feature 121 Diameter: 6.9 ± 0.3 mm
- Feature 122 Diameter: 6.9 ± 0.3 mm
- Feature 123 Diameter: 6.9 ± 0.3 mm
- Feature 124 Diameter: 6.9 ± 0.3 mm
- Feature 125 Diameter: 6.9 ± 0.3 mm
- Feature 126 Diameter: 6.9 ± 0.3 mm
- Feature

Type ZY 200L (L = Left for pin pair 4/5)
Type ZY 200R (R = Right for pin pair 6/7) } UL 758, style 3751

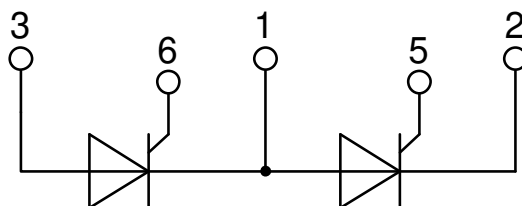

Thyristor

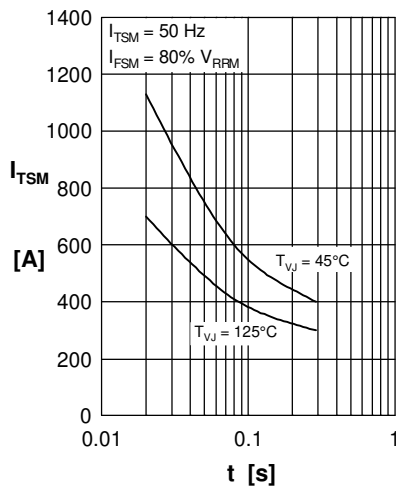


Fig. 1 Surge overload current I_{TSM} ,
 I_{FSM} : Crest value, t : duration

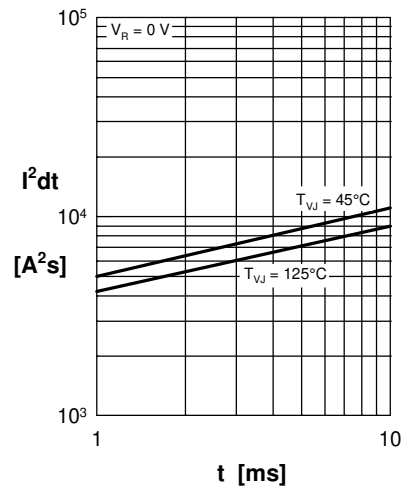


Fig. 2 I^2dt versus time (1-10 ms)

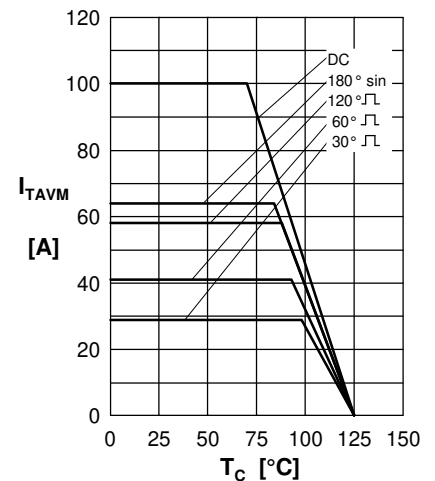


Fig. 3 Max. forward current
 at case temperature

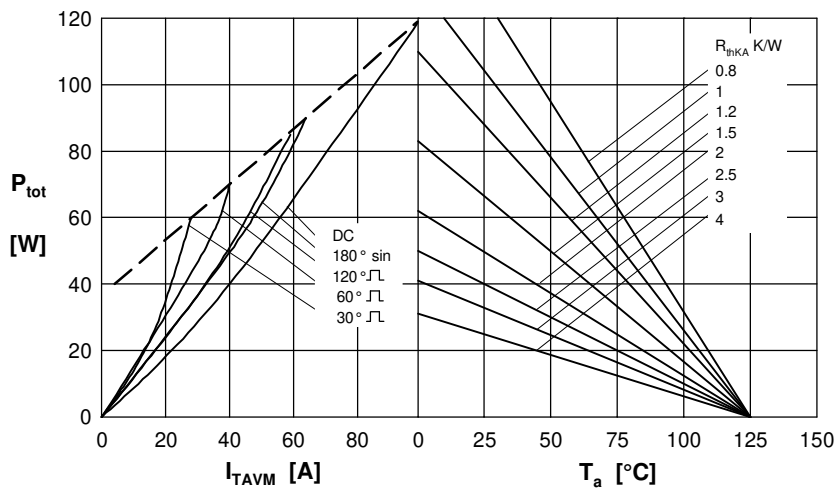


Fig. 4 Power dissipation vs. on-state current & ambient temperature
 (per thyristor or diode)

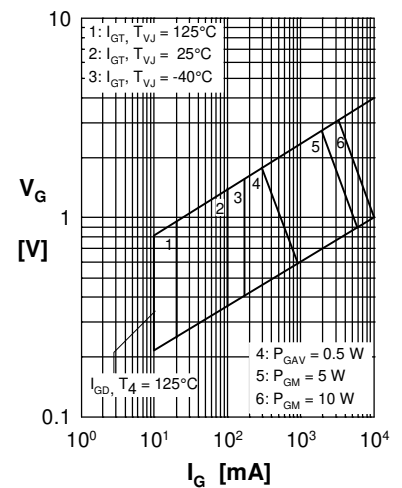


Fig. 5 Gate trigger characteristics

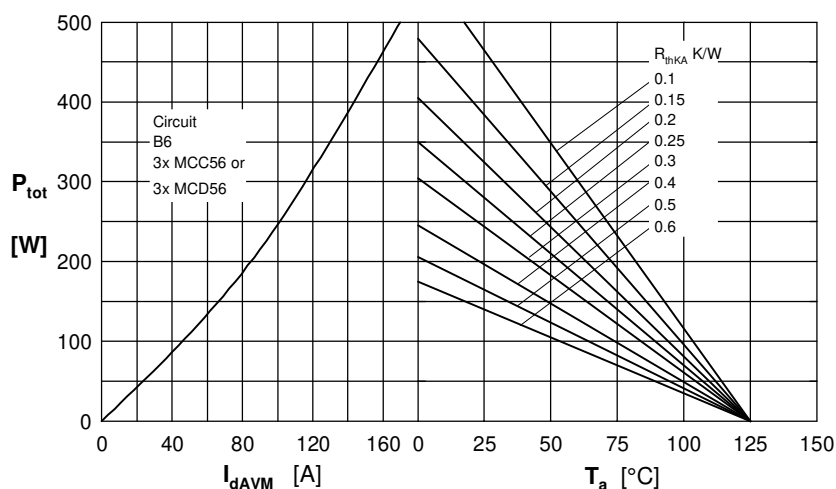


Fig. 6 Three phase rectifier bridge: Power dissipation versus direct
 output current and ambient temperature

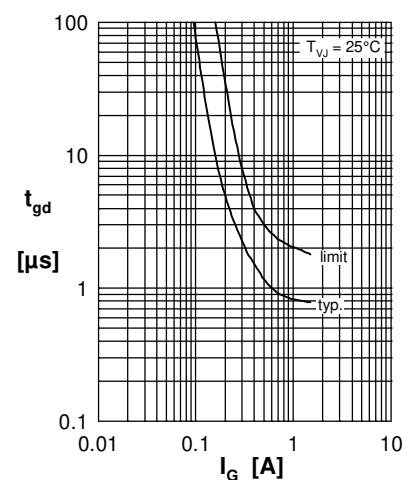


Fig. 7 Gate trigger delay time

Thyristor

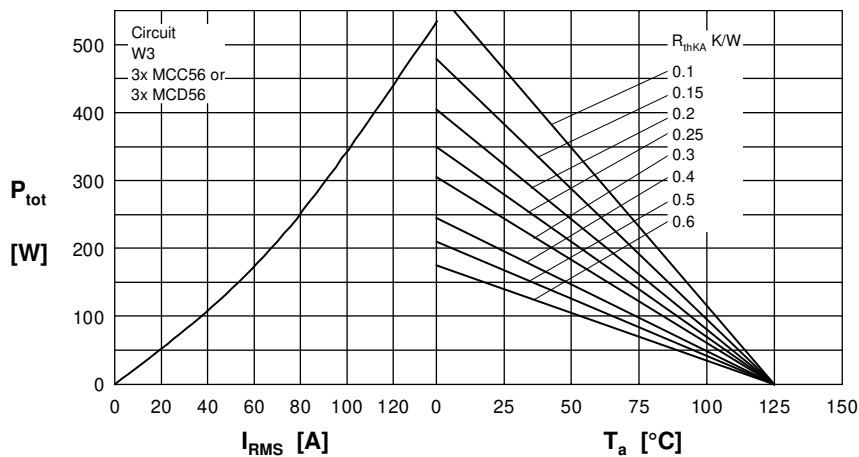


Fig. 8 Three phase AC-controller: Power dissipation versus RMS output current and ambient temperature

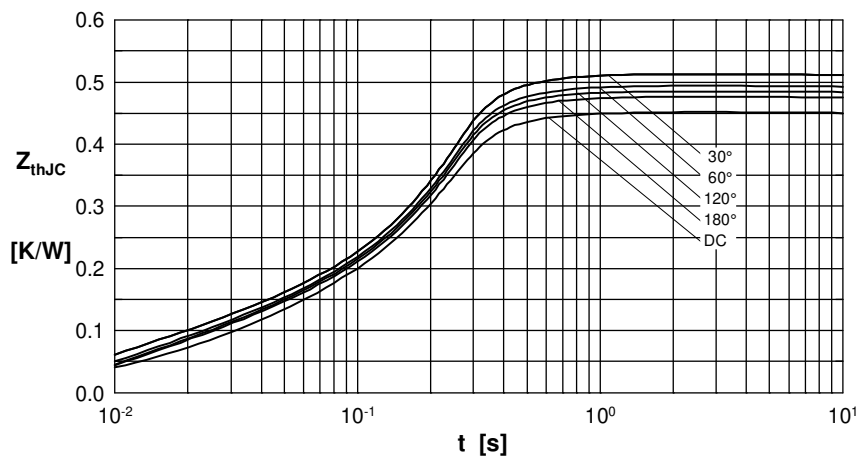


Fig. 9 Transient thermal impedance junction to case (per thyristor/diode)

R_{thJC} for various conduction angles d:

d	R_{thJC} [K/W]
DC	0.450
180°	0.470
120°	0.490
60°	0.505
30°	0.520

Constants for Z_{thJC} calculation:

i	R_{thi} [K/W]	t_i [s]
1	0.014	0.0150
2	0.026	0.0095
3	0.410	0.1750

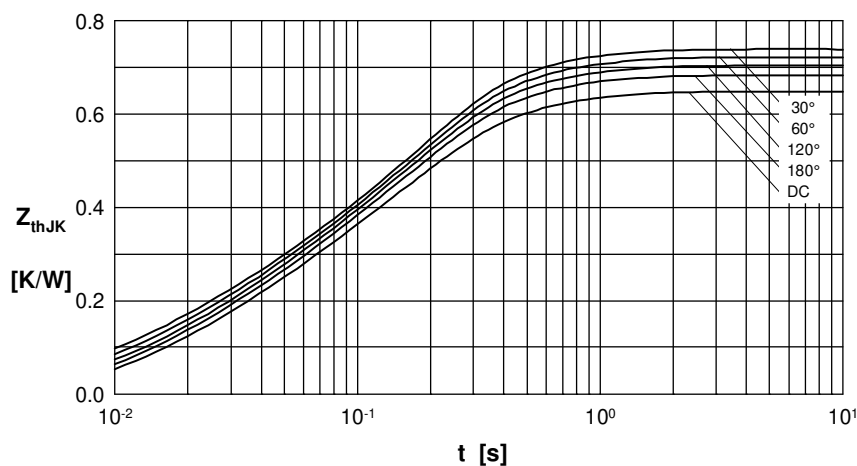


Fig. 10 Transient thermal impedance junction to heatsink (per thyristor/diode)

R_{thJK} for various conduction angles d:

d	R_{thJK} [K/W]
DC	0.650
180°	0.670
120°	0.690
60°	0.705
30°	0.720

Constants for Z_{thJK} calculation:

i	R_{thi} [K/W]	t_i [s]
1	0.014	0.0150
2	0.026	0.0095
3	0.410	0.1750
4	0.200	0.6700