


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASED	08AUG2019	L.Y	I.Y
	A1	REVISED PER ECO-20-005746	21APR2020	L.Y	W.W
	B	REVISED PER ECO-20-013861	28SEP2020	X.Y	W.W

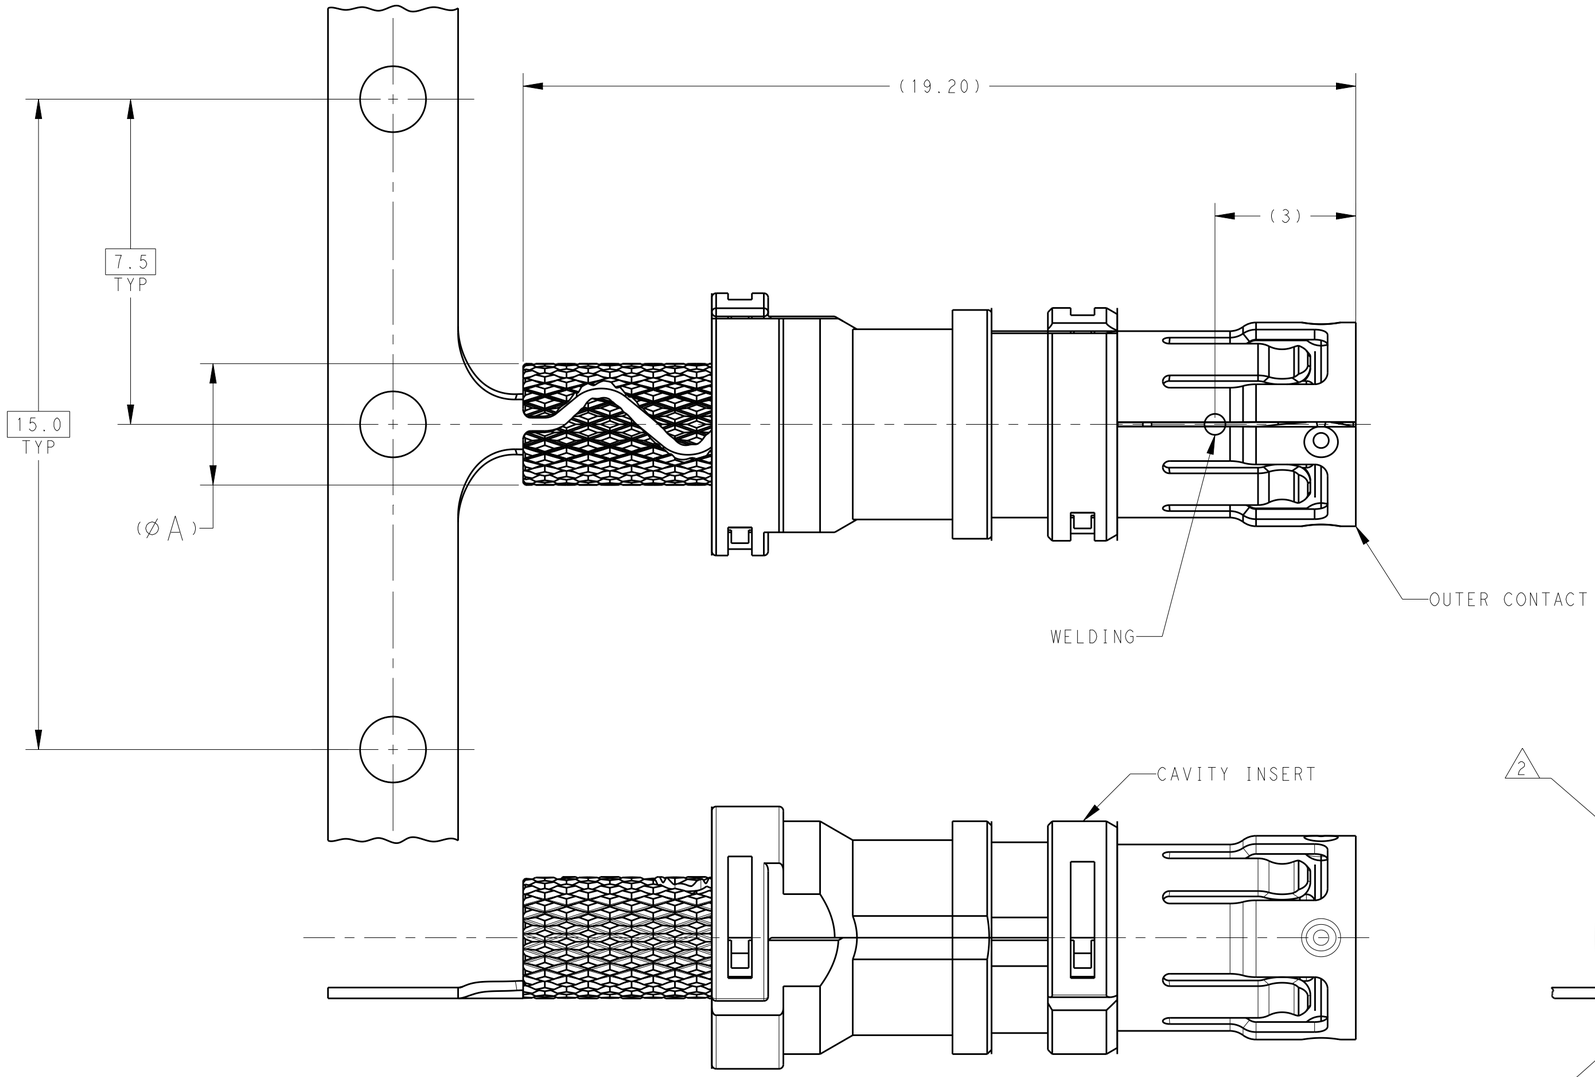

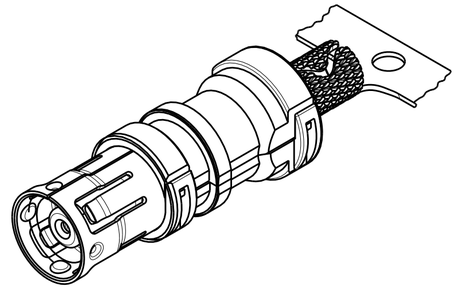

ISOMETRIC VIEW
SCALE 5:1

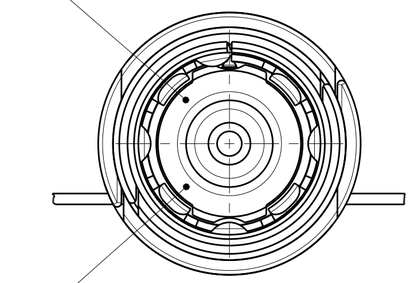

	A	CAVITY INSERT COLOR	DIELECTRIC COLOR	MATERIAL	APPLICABLE CABLE SIZE	PART NUMBER
B	3.65	JET BLACK	SIGNAL BLUE	4	RG-58,RG-58 LL	2326904-3
B	2.80	GREEN	GREEN	4	RTK-031,SHIKOKU 2DS-PPFW(TA)	2326904-2
	2.22	NUT BROWN	NUT BROWN	4	1.5CS, 1.5DS, DACAR 462, RG-174, RG-174 LL, RG-316	2326904-1

1. OUTER CONTACT: 1.0µm MIN TIN.
2. CAVITY INSERT SUBASSEMBLY INTERFACE PER ISO 20860-1, ROAD VEHICLES - RADIO FREQUENCY INTERFACE - DIMENSIONS AND ELECTRICAL REQUIREMENTS.
3. PACKAGED ON REEL.
4. OUTER CONTACT: PHOSPHOR BRONZE OR COPPER ALLOY. DIELECTRIC: POLYESTER PBT; CAVITY INSERTS: NYLON; COLOR: SEE TABLE.
5. 2326904-2 AS SHOWN.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL: SEE TABLE -

FINISH: 1 -

DWN L.YANG 08AUG2019
CHK F.PAN 08AUG2019
APVD I.YIN 08AUG2019
PRODUCT SPEC 108-32137
APPLICATION SPEC 114-32145
WEIGHT -

TE Connectivity

NAME CAVITY INSERT SUBASSEMBLY, FEMALE, 180 DEGREE, FAKRA -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	-	C-2326904	

RESTRICTED CUSTOMER | SCALE 10:1 | SHEET 1 OF 1 | REV B

1471-9 (3/13)

Downloaded from Arrow.com.