

IR2133/IR2135(J&S)&(PbF) IR2233/IR2235(J&S)&(PbF)

3-PHASE BRIDGE DRIVER

Features

- Floating channel designed for bootstrap operation
Fully operational to +600V or +1200V
Tolerant to negative transient voltage
dV/dt immune
- Gate drive supply range from 10V/12V to 20V DC and
up to 25V for transient
- Undervoltage lockout for all channels
- Over-current shut down turns off all six drivers
- Independent 3 half-bridge drivers
- Matched propagation delay for all channels
- 2.5V logic compatible
- Outputs out of phase with inputs
- All parts are also available LEAD-FREE


Description

The IR2133/IR2135/IR2233/IR2355 (J&S) are high voltage, high speed power MOSFET and IGBT driver with three independent high side and low side referenced output channels for 3-phase applications. Proprietary HVIC technology enables ruggedized monolithic construction. Logic inputs are compatible with CMOS or LSTTL outputs, down to 2.5V logic. An independent operational amplifier provides an analog feedback of bridge current via an external current sense resistor. A current trip function which terminates all six outputs can also be derived from this resistor. A shutdown function is available to terminate all six outputs. An open drain FAULT signal is provided to indicate that an over-current or undervoltage shutdown has occurred. Fault conditions are cleared with the FLT-CLR lead. The output drivers feature a high pulse current buffer stage designed for minimum driver cross-conduction. Propagation delays are matched to simplify use in high frequency applications. The floating channels can be used to drive N-channel power MOSFETs or IGBTs in the high side configuration which operates up to 600 volts or 1200 volts.


Product Summary

V_{OFFSET}	600V or 1200V max.
I_{O+/-}	200 mA / 420 mA
V_{OUT}	10 - 20V or 12 - 20V
t_{on/off} (typ.)	750/700 ns
Deadtime (typ.)	250 ns

Packages

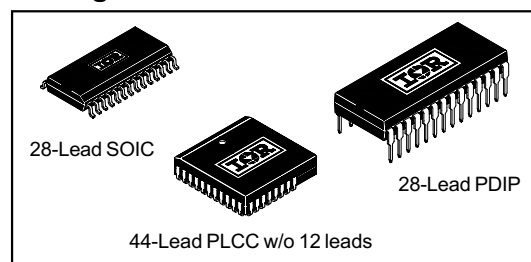

Typical Connection

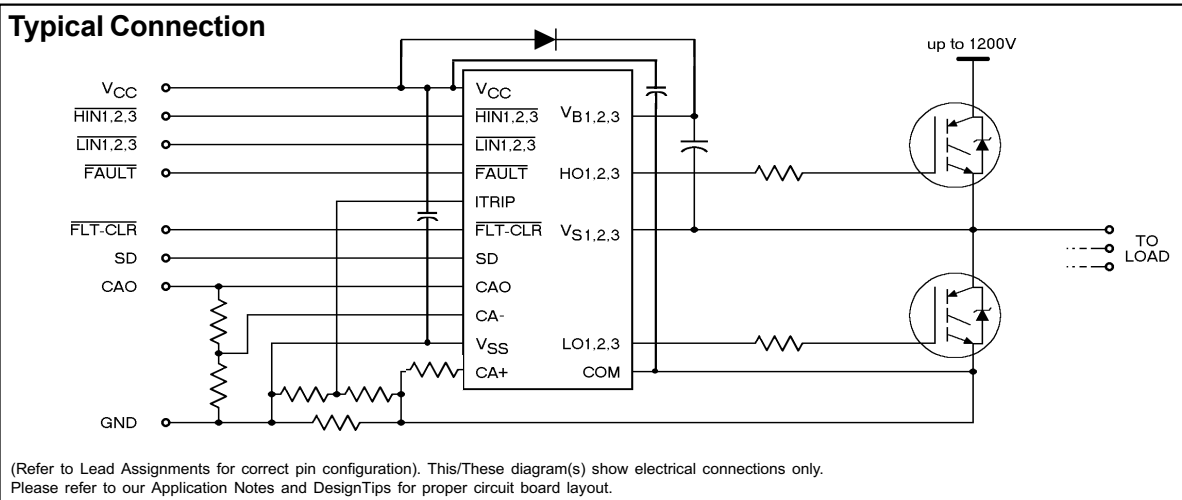

IR2133/IR2135/IR2233/IR2235(J&S)&(PbF)

International
IOR Rectifier

Absolute Maximum Ratings

Absolute Maximum Ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. The Thermal Resistance and Power Dissipation ratings are measured under board mounted and still air conditions.

Symbol	Definition	Min.	Max.	Units
$V_{B1,2,3}$	High side floating supply voltage (IR2133/IR2135)	-0.3	625	V
	(IR2233/IR2235)	-0.3	1225	
$V_{S1,2,3}$	High side floating supply offset voltage	$V_{B1,2,3} - 25$	$V_{B1,2,3} + 0.3$	
$V_{HO1,2,3}$	High side floating output voltage	$V_{S1,2,3} - 0.3$	$V_{B1,2,3} + 0.3$	
V_{CC}	Fixed supply voltage	-0.3	25	
V_{SS}	Logic ground	$V_{CC} - 25$	$V_{CC} + 0.3$	
$V_{LO1,2,3}$	Low side output voltage	-0.3	$V_{CC} + 0.3$	
V_{IN}	Logic input voltage ($\overline{HIN}$, $\overline{LIN}$, ITRIP, SD & $\overline{FLT-CLR}$)	$V_{SS} - 0.3$	($V_{SS} + 15$) or ($V_{CC} + 0.3$) whichever is lower	
$V_{IN,AMP}$	Op amp input voltage ($CA+$ & $CA-$)	$V_{SS} - 0.3$	$V_{CC} + 0.3$	
$V_{OUT,AMP}$	Op amp output voltage (CAO)	$V_{SS} - 0.3$	$V_{CC} + 0.3$	
V_{FLT}	FAULT output voltage	$V_{SS} - 0.3$	$V_{CC} + 0.3$	
dV_S/dt	Allowable offset supply voltage transient	—	50	V/ns
P_D	Package power dissipation @ $T_A \leq 25^\circ C$ (28 Lead PDIP)	—	1.5	W
	(28 Lead SOIC)	—	1.6	
	(44 lead PLCC)	—	2.0	
R_{thJA}	Thermal resistance, junction to ambient (28 Lead PDIP)	—	83	$^\circ C/W$
	(28 Lead SOIC)	—	78	
	(44 lead PLCC)	—	63	
T_J	Junction temperature	—	125	$^\circ C$
T_S	Storage temperature	-55	150	
T_L	Lead temperature (soldering, 10 seconds)	—	300	

Recommended Operating Conditions

The input/output logic timing diagram is shown in figure 1. For proper operation the device should be used within the recommended conditions. All voltage parameters are absolute voltages referenced to COM. The V_S offset rating is tested with all supplies biased at 15V differential.

Symbol	Parameter Definition	Min.	Max.	Units
$V_{B1,2,3}$	High side floating supply voltage	$V_{S1,2,3} + 10/12$	$V_{S1,2,3} + 20$	V
$V_{S1,2,3}$	High side floating supply offset voltage (IR2133/IR2135)	Note 1	600	
	(IR2233/IR2235)	Note 1	1200	
$V_{HO1,2,3}$	High side floating output voltage	$V_{S1,2,3}$	$V_{B1,2,3}$	
V_{CC}	Fixed supply voltage	10 or 12	20	
V_{SS}	Low side driver return	-5	5	
$V_{LO1,2,3}$	Low side output voltage	0	V_{CC}	
V_{IN}	Logic input voltage ($\overline{HIN}$, $\overline{LIN}$, ITRIP, SD & $\overline{FLT-CLR}$)	V_{SS}	$V_{SS} + 5$	
$V_{IN,AMP}$	Op amp input voltage ($CA+$ & $CA-$)	V_{SS}	$V_{SS} + 5$	
$V_{OUT,AMP}$	Op amp output voltage (CAO)	V_{SS}	$V_{SS} + 5$	
V_{FLT}	FAULT output voltage	V_{SS}	V_{CC}	

Note 1: Logic operational for V_S of COM - 4V to COM + 600V/1200V. Logic state held for V_S of COM -4V to COM -VBS. (Please refer to the Design Tip DT97-3 for more details).

Note 2: All input pins, op amp input and output pins are internally clamped with a 5.2V zener diode.

Dynamic Electrical Characteristics

V_{BIAS} (V_{CC} , $V_{BS1,2,3}$) = 15V, $V_{S1,2,3}$ = V_{SS} , T_A = 25°C and C_L = 1000 pF unless otherwise specified.

Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
t_{on}	Turn-on propagation delay	500	750	1000	ns	$V_{IN} = 0 \text{ \& } 5V$ $V_{S1,2,3} = 0 \text{ to } 600V$ or 1200V
t_{off}	Turn-off propagation delay	450	700	950		
t_r	Turn-on rise time	—	90	150		
t_f	Turn-off fall time	—	40	70		
t_{sd}	SD to output shutdown propagation delay	500	750	1000		
t_{itrip}	ITRIP to output shutdown propagation delay	600	850	1100		
t_{bl}	ITRIP blanking time	—	400	—		
t_{flt}	ITRIP to $\overline{FAULT}$ propagation delay	400	650	900		
$t_{fil,in}$	Input filter time (HIN , LIN and SD)	—	310	—		
t_{fltclr}	FLT-CLR to $\overline{FAULT}$ clear time	600	850	1100		
DT	Deadtime, LS turn-off to HS turn-on & HS turn-off to LS turn-on	100	250	400	V/ μ s	$V_{IN} = 0 \text{ \& } 5V$
SR+	Amplifier slew rate (positive)	5	10	—		
SR-	Amplifier slew rate (negative)	2	2.5	—		

NOTE: For high side PWM, HIN pulse width must be $\geq 1\mu$ sec

Static Electrical Characteristics

V_{BIAS} (V_{CC} , $V_{BS1,2,3}$) = 15V unless otherwise specified and T_A = 25°C. All static parameters other than I_O and V_O are referenced to V_{SS} and are applicable to all six channels ($HS_{1,2,3}$ & $LS_{1,2,3}$). The V_O and I_O parameters are referenced to COM and $V_{S1,2,3}$ and are applicable to the respective output leads: $HO_{1,2,3}$ or $LO_{1,2,3}$.


Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
V_{IH}	Logic "0" Input Voltage (OUT = LO)	2.2	—	—	V	
V_{IL}	Logic "1" Input Voltage (OUT = HI)	—	—	0.8		
$V_{FCLR,IH}$	Logic "0" Fault Clear Input Voltage	2.2	—	—		
$V_{FCLR,IL}$	Logic "1" Fault Clear Input Voltage	—	—	0.8		
$V_{SD,TH+}$	SD Input Positive Going Threshold	1.6	1.9	2.2		
$V_{SD,TH-}$	SD Input Negative Going Threshold	1.4	1.7	2.0		
$V_{IT,TH+}$	ITRIP Input Positive Going Threshold	470	570	670	mV	
$V_{IT,TH-}$	ITRIP Input Negative Going Threshold	360	460	560		
V_{OH}	High Level Output Voltage, $V_{BIAS} - V_O$	—	—	100		$V_{IN} = 0V$, $I_O = 0A$
V_{OL}	Low Level Output Voltage, V_O	—	—	100		$V_{IN} = 5V$, $I_O = 0A$
I_{LK}	Offset Supply Leakage Current (IR2133/IR2135)	—	—	50	μA	$V_{B1,2,3}=V_{S1,2,3} = 600V$
	(IR2233/IR2235)	—	—	50		$V_{B1,2,3}=V_{S1,2,3} = 1200V$
I_{QBS}	Quiescent V_{BS} Supply Current	—	50	100	mA	$V_{IN} = 0V$ or 5V
I_{QCC}	Quiescent V_{CC} Supply Current	—	4	8		$V_{IN} = 0V$ or 5V
I_{IN+}	Logic "1" Input Bias Current (OUT = HI)	—	200	350	μA	$V_{IN} = 0V$
I_{IN-}	Logic "0" Input Bias Current (OUT = LO)	—	100	250		$V_{IN} = 5V$
I_{SD+}	"High" Shutdown Bias Current	—	30	100		SD = 5V
I_{SD-}	"Low" Shutdown Bias Current	—	—	100	nA	SD = 0V
I_{ITRIP+}	"High" ITRIP Bias Current	—	30	100	μA	ITRIP = 5V
I_{ITRIP-}	"Low" ITRIP Bias Current	—	—	100	nA	ITRIP = 0V

Static Electrical Characteristics — Continued

V_{BIAS} (V_{CC} , $V_{BS1,2,3}$) = 15V unless otherwise specified and $T_A = 25^\circ\text{C}$. All static parameters other than IO and VO are referenced to V_{SS} and are applicable to all six channels ($H_{S1,2,3}$ & $L_{S1,2,3}$). The VO and IO parameters are referenced to COM and $V_{S1,2,3}$ and are applicable to the respective output leads: $H_{O1,2,3}$ or $L_{O1,2,3}$.

Symbol	Parameter Definition	Min.	Typ.	Max.	Units	Test Conditions
$I_{FLTCLR+}$	"High" Fault Clear Input Bias Current	—	200	350	μA	$\overline{FLT-CLR} = 0\text{V}$
$I_{FLTCLR-}$	"Low" Fault Clear Input Bias Current	—	100	250		$\overline{FLT-CLR} = 5\text{V}$
V_{BSUV+}	V_{BS} Supply Undervoltage Positive Going Threshold (for IR2133/IR2233) (for IR2135/IR2235)	7.6 9.2	8.6 10.4	9.6 11.6	V	
V_{BSUV-}	V_{BS} Supply Undervoltage Negative Going Threshold (for IR2133/IR2233) (for IR2135/IR2235)	7.2 8.3	8.2 9.4	9.2 10.5		
V_{BSUVH}	V_{BS} Supply Undervoltage Lockout Hysteresis (for IR2133/IR2233) (for IR2135/IR2235)	— —	0.4 1	— —		
V_{CCUV+}	V_{CC} Supply Undervoltage Positive Going Threshold (for IR2133/IR2233) (for IR2135/IR2235)	7.6 9.2	8.6 10.4	9.6 11.6		
V_{CCUV-}	V_{CC} Supply Undervoltage Negative Going Threshold (for IR2133/IR2233) (for IR2135/IR2235)	7.2 8.3	8.2 9.4	9.2 10.5		
V_{CCUVH}	V_{CC} Supply Undervoltage Lockout Hysteresis (for IR2133/IR2233) (for IR2135/IR2235)	— —	0.4 1	— —		
$R_{on,FLT}$	FAULT- Low On Resistance	—	70	100	Ω	
I_{O+}	Output High Short Circuit Pulsed Current	200	250	—	mA	$V_{OUT} = 0\text{V}$, $V_{IN} = 0\text{V}$ $PW \leq 10 \mu\text{s}$
I_{O-}	Output Low Short Circuit Pulsed Current	420	500	—		$V_{OUT} = 15\text{V}$, $V_{IN} = 5\text{V}$ $PW \leq 10 \mu\text{s}$
V_{OS}	Amplifier Input Offset Voltage	—	0	30	mV	$CA+ = 0.2\text{V}$, $CA- = CAO$
$I_{IN,AMP}$	Amplifier Input Bias Current	—	—	4	nA	$CA+ = CA- = 2.5\text{V}$
CMRR	Amplifier Common Mode Rejection Ratio	50	70	—	dB	$CA+ = 0.1\text{V}$ & 5V , $CA- = CAO$
PSRR	Amplifier Power Supply Rejection Ratio	50	70	—		$CA+ = 0.2\text{V}$, $CA- = CAO$ $V_{CC} = 10\text{V}$ & 20V
$V_{OH,Amp}$	Amplifier High Level Output Voltage	5	5.2	5.4	V	$CA+ = 1\text{V}$, $CA- = 0\text{V}$
$V_{OL,Amp}$	Amplifier Low Level Output Voltage	—	—	20	mV	$CA+ = 0\text{V}$, $CA- = 1\text{V}$
$I_{SRC,Amp}$	Amplifier Output Source Current	4	7	—	mA	$CA+ = 1\text{V}$, $CA- = 0\text{V}$, $CAO = 4\text{V}$
$I_{SNK,Amp}$	Amplifier Output Sink Current	0.5	1	—		$CA+ = 0\text{V}$, $CA- = 1\text{V}$, $CAO = 2\text{V}$
$I_{O+,Amp}$	Amplifier Output High Short Circuit Current	—	10	—		$CA+ = 5\text{V}$, $CA- = 0\text{V}$, $CAO = 0\text{V}$
$I_{O-,Amp}$	Amplifier Output Low Short Circuit Current	—	4	—		$CA+ = 0\text{V}$, $CA- = 5\text{V}$, $CAO = 5\text{V}$

Functional Block Diagram

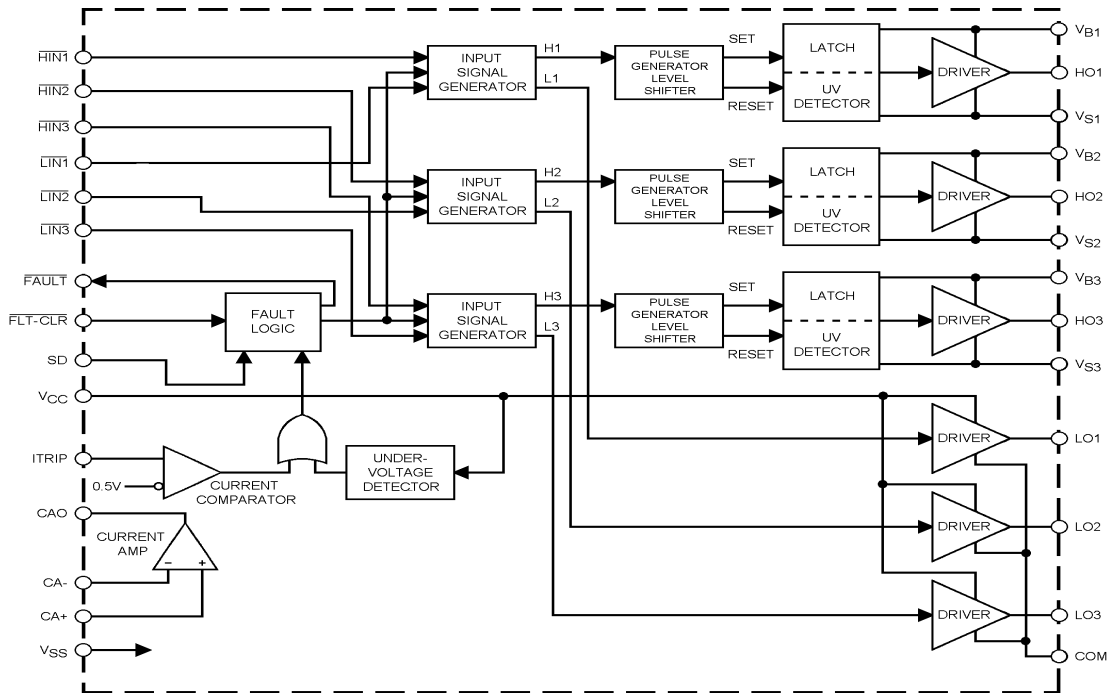

Lead Definitions

Symbol	Lead Description
$\overline{\text{HIN1,2,3}}$	Logic inputs for high side gate driver outputs (HO1,2,3), out of phase.
$\overline{\text{LIN1,2,3}}$	Logic inputs for low side gate driver outputs (LO1,2,3), out of phase.
$\overline{\text{FAULT}}$	Indicates over-current or undervoltage lockout (low side) has occurred, negative logic.
V _{CC}	Logic and low side fixed supply.
ITRIP	Input for over-current shut down.
$\overline{\text{FLT-CLR}}$	Logic input for fault clear, negative logic.
SD	Logic input for shut down.
CAO	Output of current amplifier.
CA-	Negative input of current amplifier.
CA+	Positive input of current amplifier.
V _{SS}	Logic ground.
COM	Low side return.
V _{B1,2,3}	High side floating supplies.
HO1,2,3	High side gate drive outputs.
V _{S1,2,3}	High side floating supply returns.
LO1,2,3	Low side gate drive outputs

IR2133/IR2135/IR2233/IR2235(J&S)&(PbF)

International
IR Rectifier

Lead Assignments

<table><tr><td>1</td><td>ITRIP</td><td>FAULT</td><td>28</td></tr><tr><td>2</td><td>FLT-CLR</td><td>LIN3</td><td>27</td></tr><tr><td>3</td><td>CAO</td><td>LIN2</td><td>26</td></tr><tr><td>4</td><td>CA-</td><td>LIN1</td><td>25</td></tr><tr><td>5</td><td>CA+</td><td>HIN3</td><td>24</td></tr><tr><td>6</td><td>SD</td><td>HIN2</td><td>23</td></tr><tr><td>7</td><td>VSS</td><td>HIN1</td><td>22</td></tr><tr><td>8</td><td>COM</td><td>VCC</td><td>21</td></tr><tr><td>9</td><td>LO3</td><td>VB1</td><td>20</td></tr><tr><td>10</td><td>LO2</td><td>HO1</td><td>19</td></tr><tr><td>11</td><td>LO1</td><td>VS1</td><td>18</td></tr><tr><td>12</td><td>VS3</td><td>VB2</td><td>17</td></tr><tr><td>13</td><td>HO3</td><td>HO2</td><td>16</td></tr><tr><td>14</td><td>VB3</td><td>VS2</td><td>15</td></tr></table> 28 Lead DIP	1	ITRIP	FAULT	28	2	FLT-CLR	LIN3	27	3	CAO	LIN2	26	4	CA-	LIN1	25	5	CA+	HIN3	24	6	SD	HIN2	23	7	VSS	HIN1	22	8	COM	VCC	21	9	LO3	VB1	20	10	LO2	HO1	19	11	LO1	VS1	18	12	VS3	VB2	17	13	HO3	HO2	16	14	VB3	VS2	15	<table><tr><td>HIN3</td><td>HIN2</td><td>HIN1</td><td>VCC</td><td>VB1</td><td>HO1</td><td>VS1</td></tr><tr><td>6</td><td>5</td><td>4</td><td>3</td><td>43</td><td>42</td><td>41</td></tr><tr><td>7</td><td colspan="6"></td><td>37</td><td>VB2</td></tr><tr><td>LIN1</td><td>8</td><td colspan="6"></td><td>36</td><td>HO2</td></tr><tr><td>LIN2</td><td>9</td><td colspan="6"></td><td>35</td><td>VS2</td></tr><tr><td>LIN3</td><td>10</td><td colspan="6"></td><td></td><td></td></tr><tr><td>11</td><td colspan="6"></td><td></td><td></td></tr><tr><td>FAULT</td><td>12</td><td colspan="6"></td><td></td><td></td></tr><tr><td>13</td><td colspan="6"></td><td></td><td></td></tr><tr><td>ITRIP</td><td>14</td><td colspan="6"></td><td></td><td></td></tr><tr><td>FLT-CLR</td><td>15</td><td colspan="6"></td><td>31</td><td>VB3</td></tr><tr><td>CA0</td><td>16</td><td colspan="6"></td><td>30</td><td>HO3</td></tr><tr><td>CA-</td><td>17</td><td colspan="6"></td><td>29</td><td>VS3</td></tr><tr><td>18</td><td>19</td><td>20</td><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td><td></td></tr><tr><td>CA+</td><td>SD</td><td>VSS</td><td>COM</td><td>LO3</td><td>LO2</td><td>LO1</td><td></td><td></td></tr></table> 44 Lead PLCC w/o 12 Leads	HIN3	HIN2	HIN1	VCC	VB1	HO1	VS1	6	5	4	3	43	42	41	7							37	VB2	LIN1	8							36	HO2	LIN2	9							35	VS2	LIN3	10									11									FAULT	12									13									ITRIP	14									FLT-CLR	15							31	VB3	CA0	16							30	HO3	CA-	17							29	VS3	18	19	20	21	22	23	24	25		CA+	SD	VSS	COM	LO3	LO2	LO1			<table><tr><td>1</td><td>ITRIP</td><td>FAULT</td><td>28</td></tr><tr><td>2</td><td>FLT-CLR</td><td>LIN3</td><td>27</td></tr><tr><td>3</td><td>CAO</td><td>LIN2</td><td>26</td></tr><tr><td>4</td><td>CA-</td><td>LIN1</td><td>25</td></tr><tr><td>5</td><td>CA+</td><td>HIN3</td><td>24</td></tr><tr><td>6</td><td>SD</td><td>HIN2</td><td>23</td></tr><tr><td>7</td><td>VSS</td><td>HIN1</td><td>22</td></tr><tr><td>8</td><td>COM</td><td>VCC</td><td>21</td></tr><tr><td>9</td><td>LO3</td><td>VB1</td><td>20</td></tr><tr><td>10</td><td>LO2</td><td>HO1</td><td>19</td></tr><tr><td>11</td><td>LO1</td><td>VS1</td><td>18</td></tr><tr><td>12</td><td>VS3</td><td>VB2</td><td>17</td></tr><tr><td>13</td><td>HO3</td><td>HO2</td><td>16</td></tr><tr><td>14</td><td>VB3</td><td>VS2</td><td>15</td></tr></table> 28 Lead SOIC (Wide Body)	1	ITRIP	FAULT	28	2	FLT-CLR	LIN3	27	3	CAO	LIN2	26	4	CA-	LIN1	25	5	CA+	HIN3	24	6	SD	HIN2	23	7	VSS	HIN1	22	8	COM	VCC	21	9	LO3	VB1	20	10	LO2	HO1	19	11	LO1	VS1	18	12	VS3	VB2	17	13	HO3	HO2	16	14	VB3	VS2	15
1	ITRIP	FAULT	28																																																																																																																																																																																																																																																										
2	FLT-CLR	LIN3	27																																																																																																																																																																																																																																																										
3	CAO	LIN2	26																																																																																																																																																																																																																																																										
4	CA-	LIN1	25																																																																																																																																																																																																																																																										
5	CA+	HIN3	24																																																																																																																																																																																																																																																										
6	SD	HIN2	23																																																																																																																																																																																																																																																										
7	VSS	HIN1	22																																																																																																																																																																																																																																																										
8	COM	VCC	21																																																																																																																																																																																																																																																										
9	LO3	VB1	20																																																																																																																																																																																																																																																										
10	LO2	HO1	19																																																																																																																																																																																																																																																										
11	LO1	VS1	18																																																																																																																																																																																																																																																										
12	VS3	VB2	17																																																																																																																																																																																																																																																										
13	HO3	HO2	16																																																																																																																																																																																																																																																										
14	VB3	VS2	15																																																																																																																																																																																																																																																										
HIN3	HIN2	HIN1	VCC	VB1	HO1	VS1																																																																																																																																																																																																																																																							
6	5	4	3	43	42	41																																																																																																																																																																																																																																																							
7							37	VB2																																																																																																																																																																																																																																																					
LIN1	8							36	HO2																																																																																																																																																																																																																																																				
LIN2	9							35	VS2																																																																																																																																																																																																																																																				
LIN3	10																																																																																																																																																																																																																																																												
11																																																																																																																																																																																																																																																													
FAULT	12																																																																																																																																																																																																																																																												
13																																																																																																																																																																																																																																																													
ITRIP	14																																																																																																																																																																																																																																																												
FLT-CLR	15							31	VB3																																																																																																																																																																																																																																																				
CA0	16							30	HO3																																																																																																																																																																																																																																																				
CA-	17							29	VS3																																																																																																																																																																																																																																																				
18	19	20	21	22	23	24	25																																																																																																																																																																																																																																																						
CA+	SD	VSS	COM	LO3	LO2	LO1																																																																																																																																																																																																																																																							
1	ITRIP	FAULT	28																																																																																																																																																																																																																																																										
2	FLT-CLR	LIN3	27																																																																																																																																																																																																																																																										
3	CAO	LIN2	26																																																																																																																																																																																																																																																										
4	CA-	LIN1	25																																																																																																																																																																																																																																																										
5	CA+	HIN3	24																																																																																																																																																																																																																																																										
6	SD	HIN2	23																																																																																																																																																																																																																																																										
7	VSS	HIN1	22																																																																																																																																																																																																																																																										
8	COM	VCC	21																																																																																																																																																																																																																																																										
9	LO3	VB1	20																																																																																																																																																																																																																																																										
10	LO2	HO1	19																																																																																																																																																																																																																																																										
11	LO1	VS1	18																																																																																																																																																																																																																																																										
12	VS3	VB2	17																																																																																																																																																																																																																																																										
13	HO3	HO2	16																																																																																																																																																																																																																																																										
14	VB3	VS2	15																																																																																																																																																																																																																																																										
IR2133 IR2135	IR2133J IR2135J IR2233J IR2235J	IR2133S IR2135S IR2233S IR2235S																																																																																																																																																																																																																																																											
Part Number																																																																																																																																																																																																																																																													

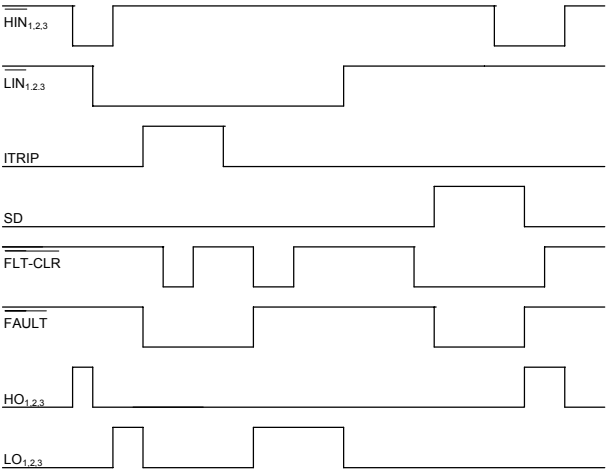


Figure 1. Input/Output Timing Diagram

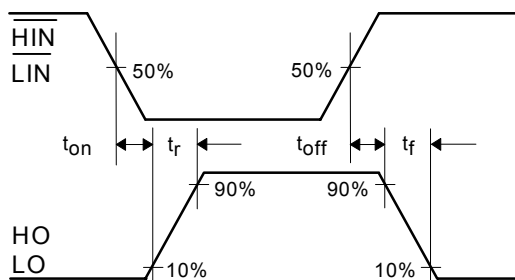


Figure 2. Switching Time Waveform Definitions



Figure 3. Deadtime Waveform Definitions

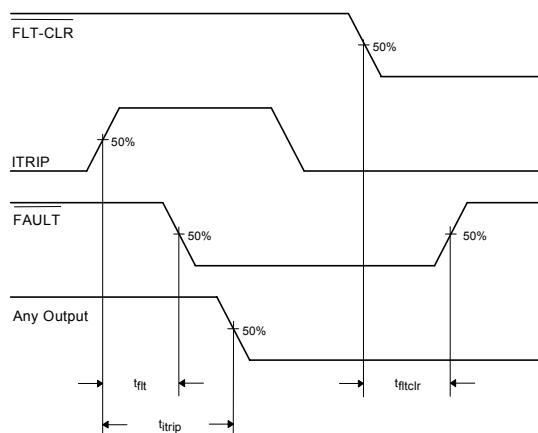


Figure 4. Overcurrent Shutdown Waveform

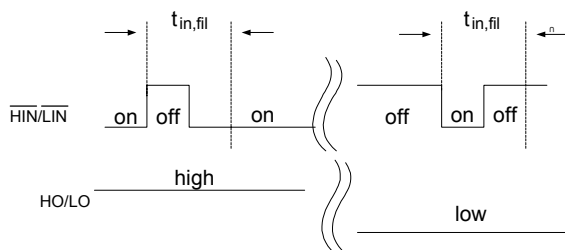


Figure 4.5. Input Filter Function




Figure 5. Shutdown Waveform Definitions

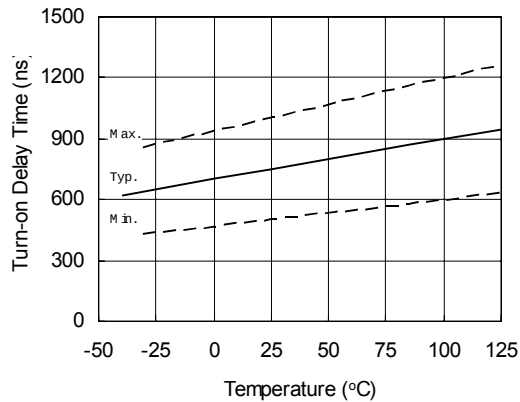


Figure 6A. Turn-On Time vs. Temperature

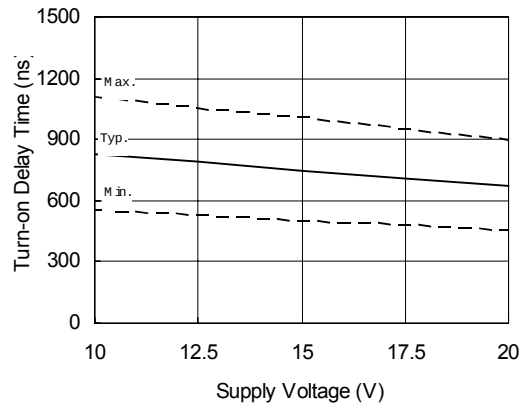


Figure 6B. Turn-On Time vs. Voltage

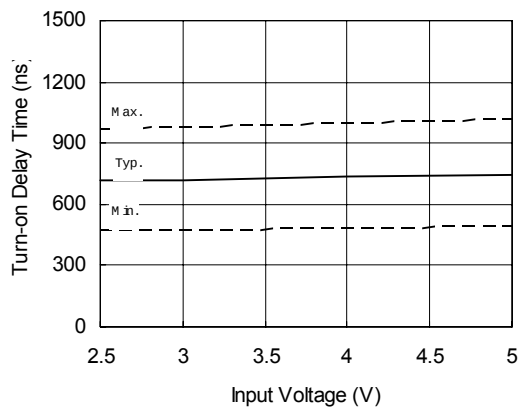


Figure 6C. Turn-On Time vs. Input Voltage

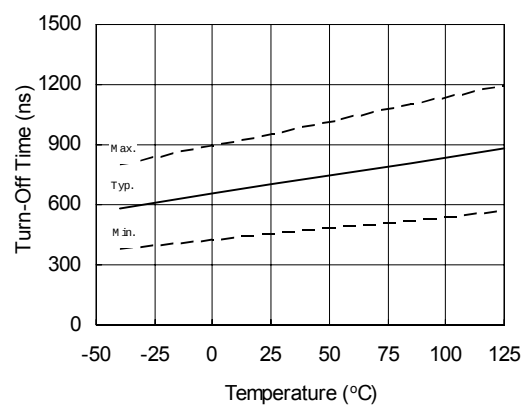


Figure 7A. Turn-Off Time vs. Temperature



Figure 7B. Turn-Off Time vs. Voltage

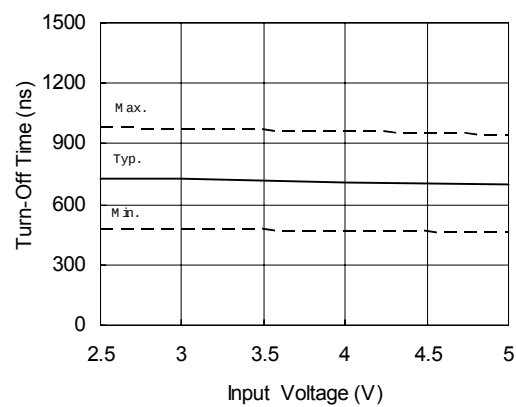


Figure 7C. Turn-Off Time vs. Input Voltage



Figure 8A. Turn-On Rise Time vs. Temperature

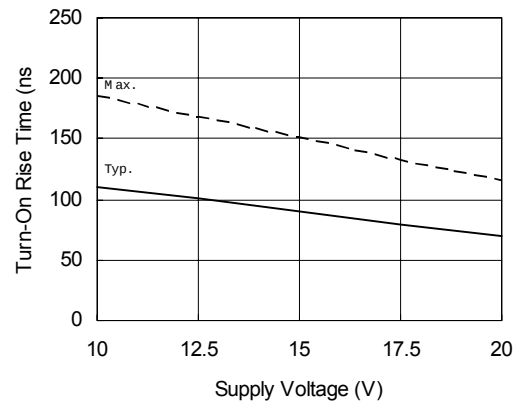


Figure 8B. Turn-On Rise Time vs. Voltage



Figure 9A. Turn-Off Fall Time vs. Temperature

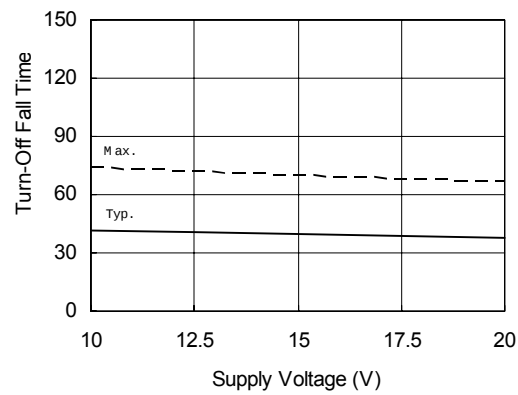


Figure 9B. Turn-Off Fall Time vs. Voltage



Figure 10A. SD to Output shutdown Time vs. Temperature



Figure 10B. SD to Output shutdown Time vs. Voltage

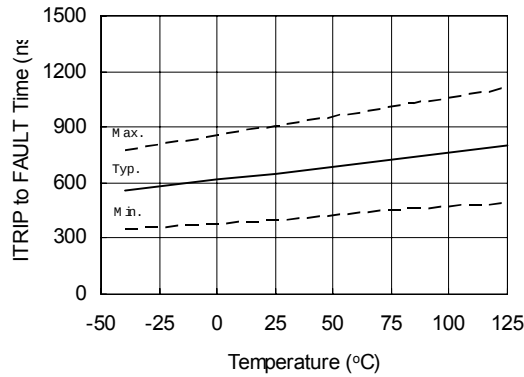


Figure 11A. ITRIP to FAULT Time vs. Temperature



Figure 11B. ITRIP to FAULT Time vs. Voltage

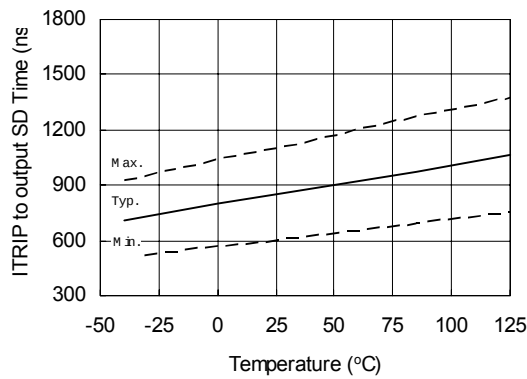


Figure 12A. ITRIP to output shutdown Time vs. Temperature



Figure 12B. ITRIP to output shutdown Time vs. Voltage

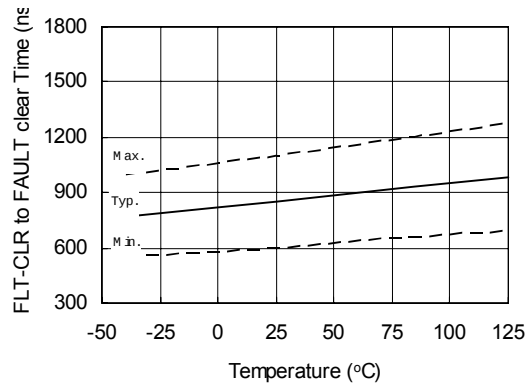


Figure 13A. FLT-CLR to FAULT clear Time vs. Temperature

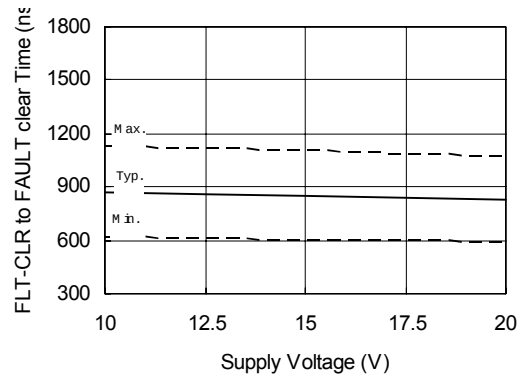


Figure 13B. FLT-CLR to FAULT clear Time vs. Voltage

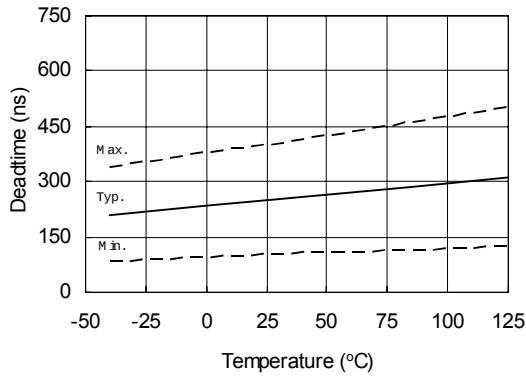


Figure 14A. Deadtime vs. Temperature

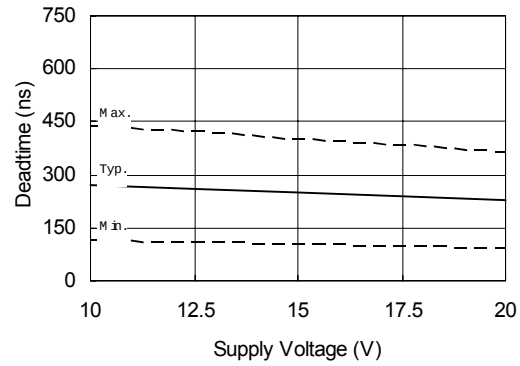


Figure 14B. Deadtime vs. Voltage

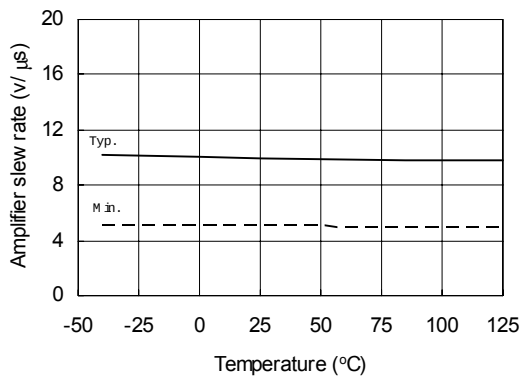


Figure 15A. Amplifier slew rate (+)
vs. Temperature

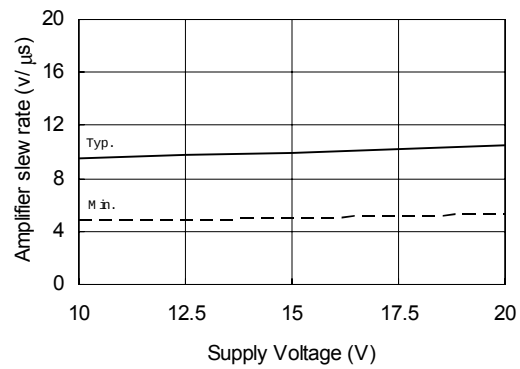


Figure 15B. Amplifier slew rate (+)
vs. Voltage

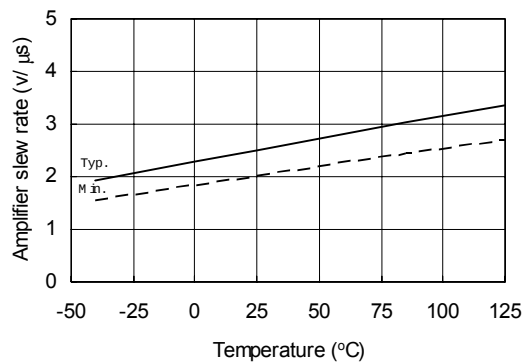


Figure 16A. Amplifier slew rate (-)
vs. Temperature

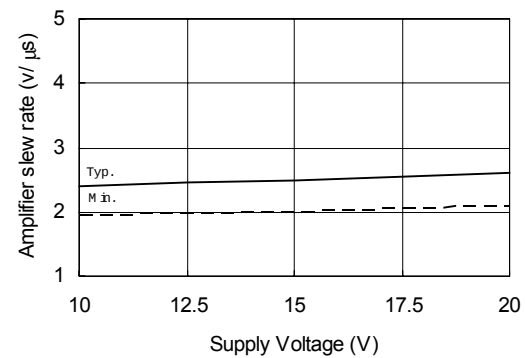


Figure 16B. Amplifier slew rate (-)
vs. Voltage

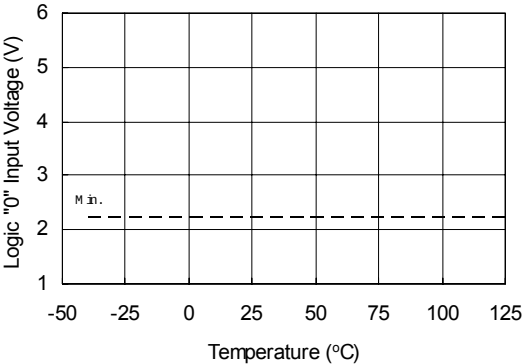


Figure 17A. Logic "0" Input Voltage (OUT=LO), Fault Clear Voltage vs. Temperature

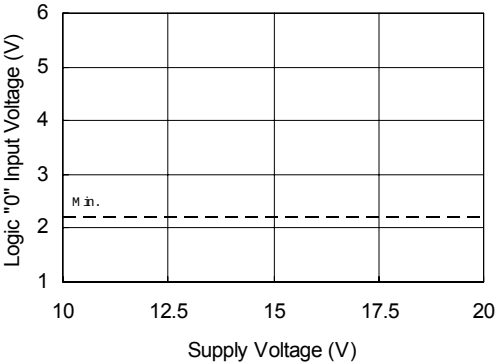


Figure 17B. Logic "0" Input Voltage (OUT=LO), Fault Clear Voltage vs. Voltage

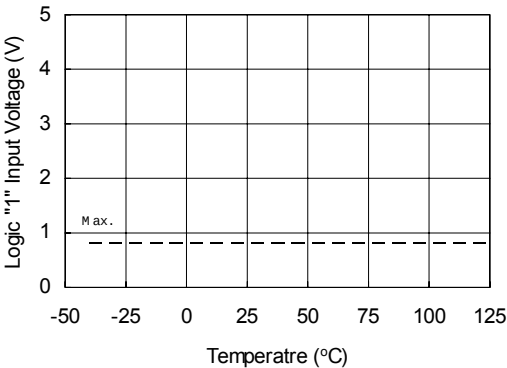


Figure 18A. Logic "1" Input (OUT=HI), Fault Clear Input Voltage vs. Temperature

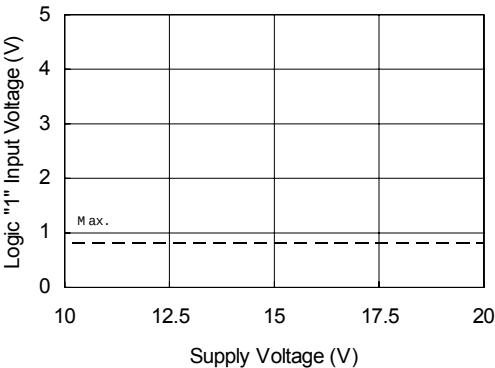


Figure 18B. Logic "1" Input (OUT=HI), Fault Clear Input Voltage vs. Voltage

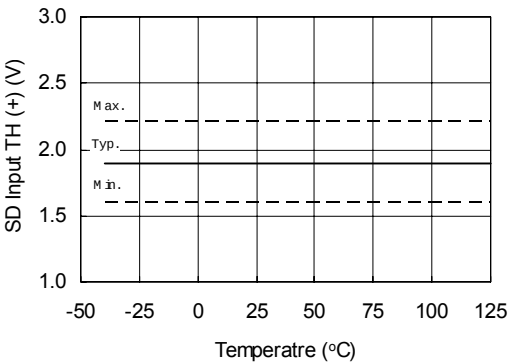


Figure 21A. SD Input TH(+) vs. Temperature

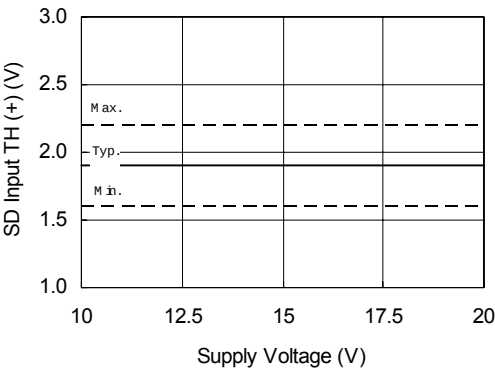


Figure 21B. SD Input TH(+) vs. Voltage

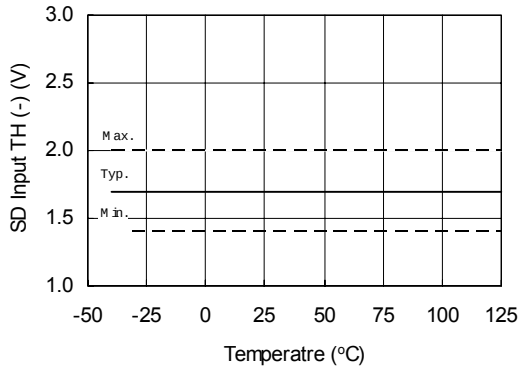


Figure 22A. SD Input TH(-) vs. Temperature



Figure 22B. SD Input TH(-) vs. Voltage



Figure 23A. I_{TRIP} Input TH(+) vs. Temperature

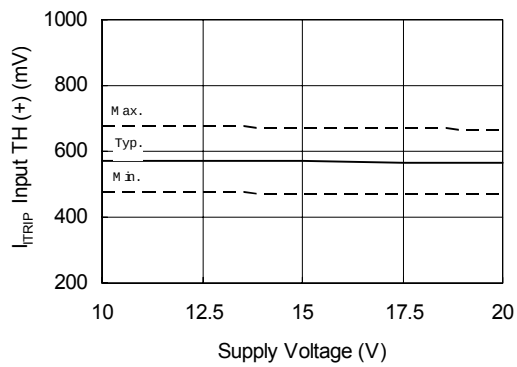


Figure 23B. I_{TRIP} Input TH(+) vs. Voltage



Figure 24A. I_{TRIP} Input TH(-) vs. Temperature



Figure 24B. I_{TRIP} Input TH(-) vs. Voltage

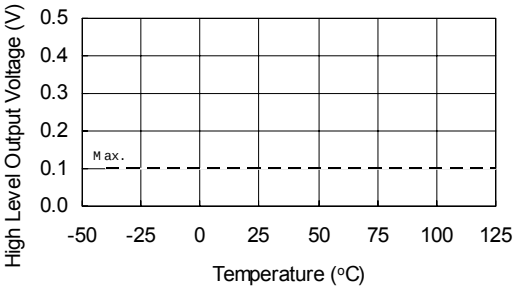


Figure 25A. High Level Output vs. Temperature

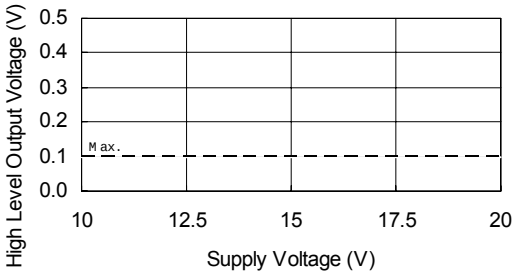


Figure 25B. High Level Output vs. Voltage

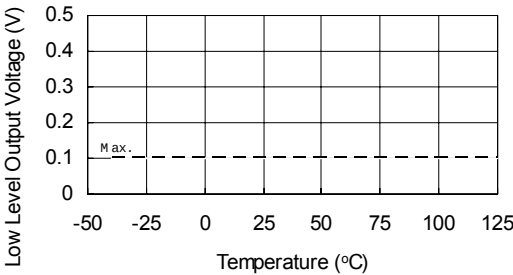


Figure 26A. Low Level Output vs. Temperature

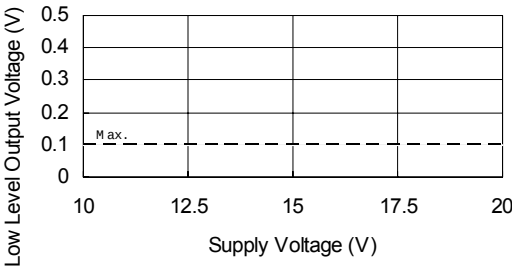


Figure 26B. Low Level Output vs. Voltage

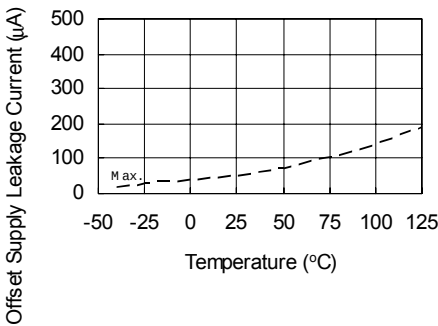


Figure 27A. Offset Supply Leakage Current vs. Temperature

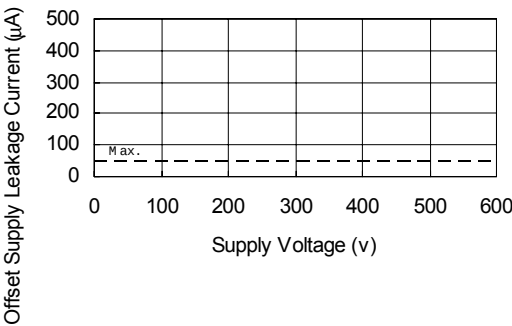


Figure 27B. Offset Supply Leakage Current vs. Voltage

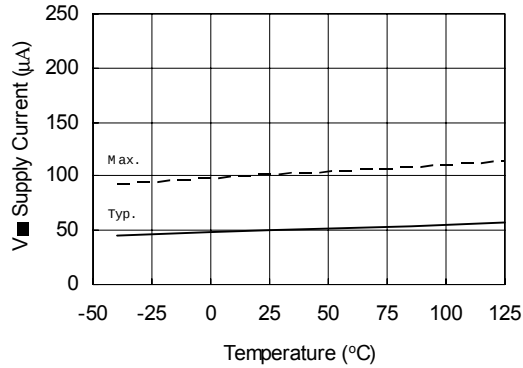


Figure 28A. V_{BS} Supply Current vs. Temperature

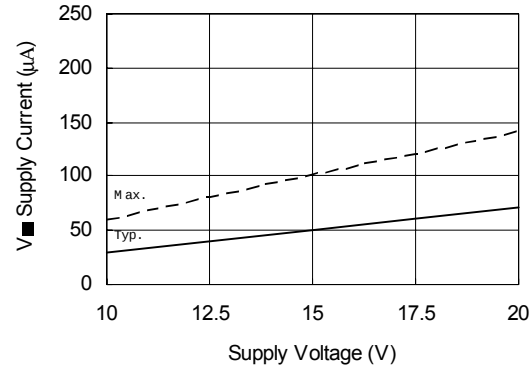


Figure 28B. V_{BS} Supply Current vs. Voltage



Figure 29A. V_{CC} Supply Current vs. Temperature

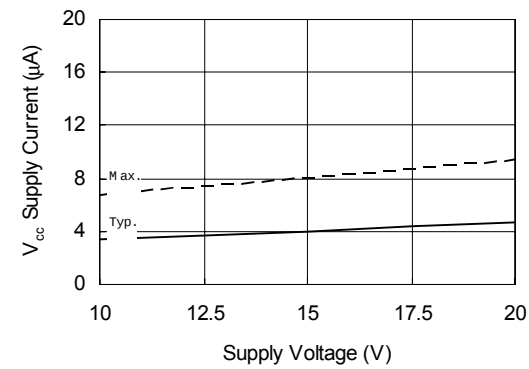


Figure 29B. V_{CC} Supply Current vs. Voltage



Figure 30A. Logic "1" Input Bias Current vs. Temperature

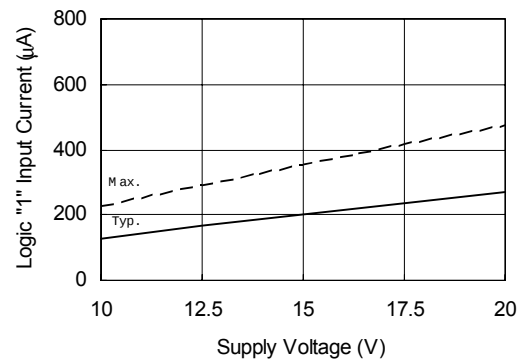


Figure 30B. Logic "1" Input Bias Current vs. Voltage

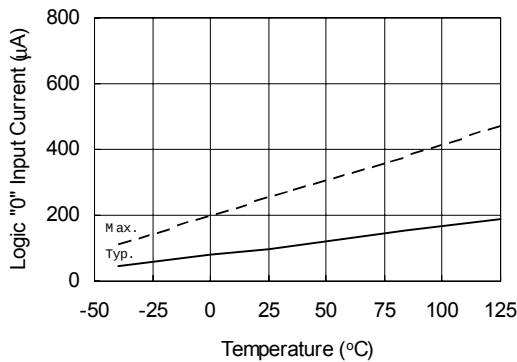


Figure 31A. Logic "0" Input Bias Current vs. Temperature

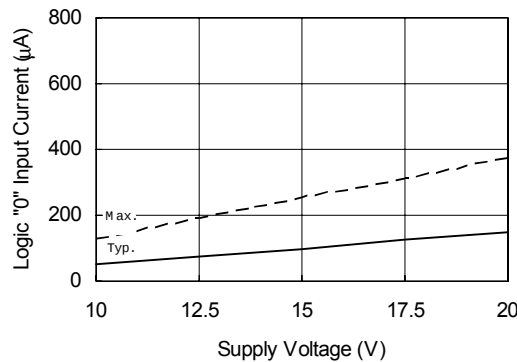


Figure 31B. Logic "0" Input Bias Current vs. Supply Voltage

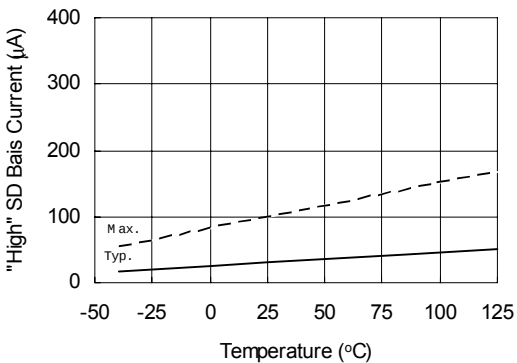


Figure 32A. "High" Shutdown Bias Current vs. Temperature

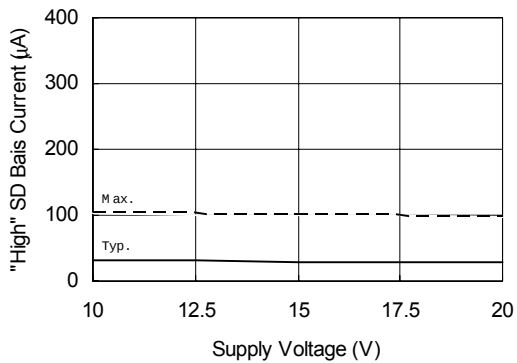


Figure 32B. "High" Shutdown Bias Current vs. Supply Voltage

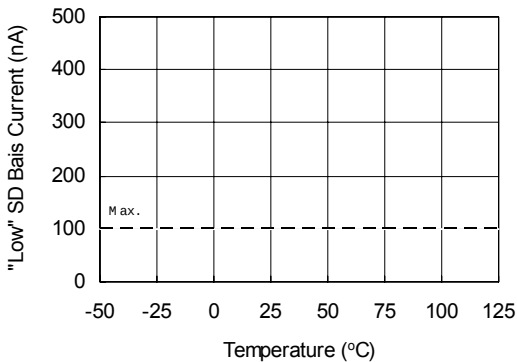


Figure 33A. "Low" Shutdown Bias Current vs. Temperature

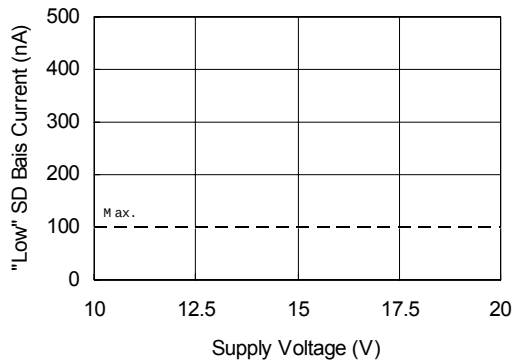


Figure 33B. "Low" Shutdown Bias Current vs. Supply Voltage



Figure 34A. "High" I_{TRIP} Bias Current vs. Temperature

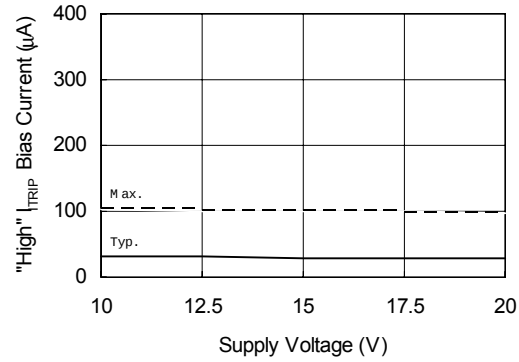


Figure 34B. "High" I_{TRIP} Bias Current vs. Supply Voltage



Figure 35A. "Low" I_{TRIP} Bias Current vs. Temperature

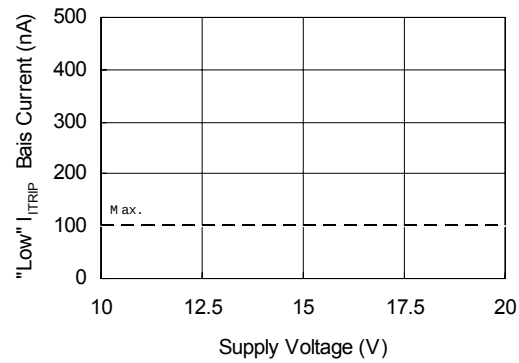


Figure 35B. "Low" I_{TRIP} Bias Current vs. Supply Voltage

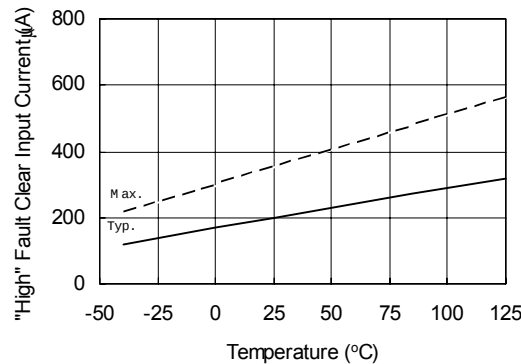


Figure 36A. "High" Fault Clear Input Bias Current vs. Temperature

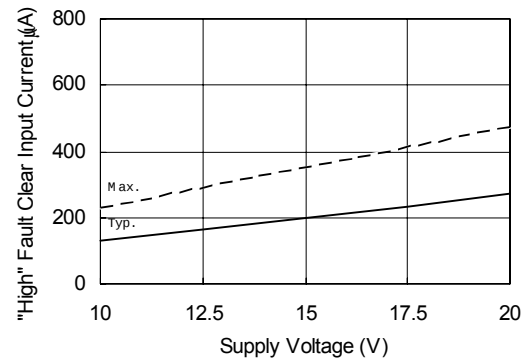


Figure 36B. "High" Fault Clear Input Bias Current vs. Supply voltage

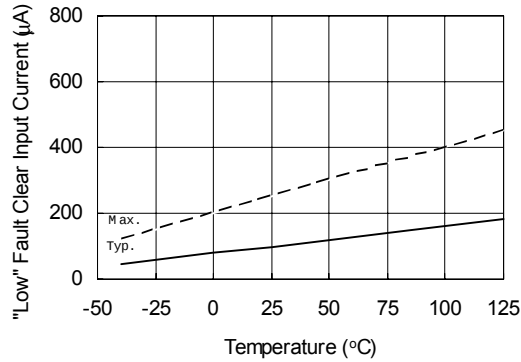


Figure 37A. "Low" Fault Clear Input Bias Current vs. Temperature



Figure 37B. "Low" Fault Clear Input Bias Current vs. Supply Voltage

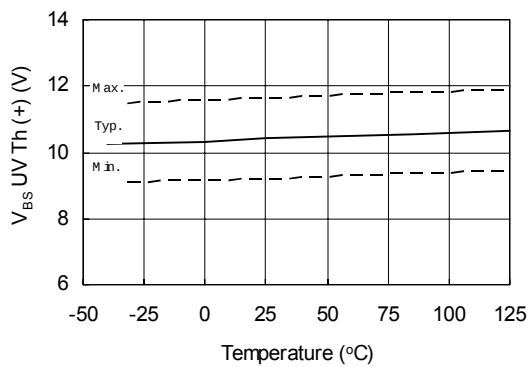


Figure 38A. IR2135/IR2235 V_{BS} Undervoltage Threshold (+) vs. Temperature

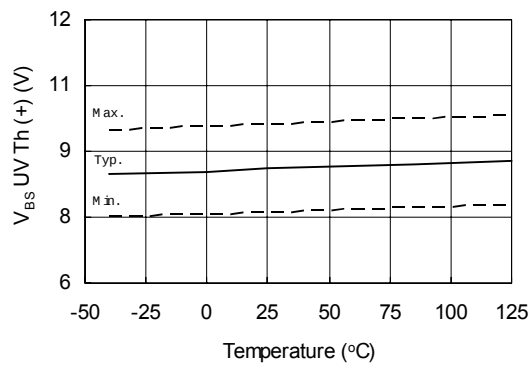


Figure 38B. IR2133/IR2233 V_{BS} Undervoltage Threshold (+) vs. Temperature

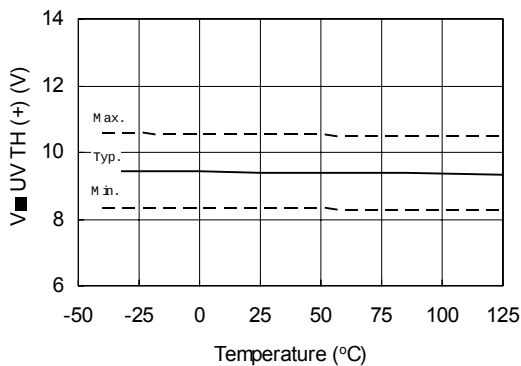


Figure 39A. IR2135/IR2235 V_{BS} Undervoltage Threshold (-) vs. Temperature

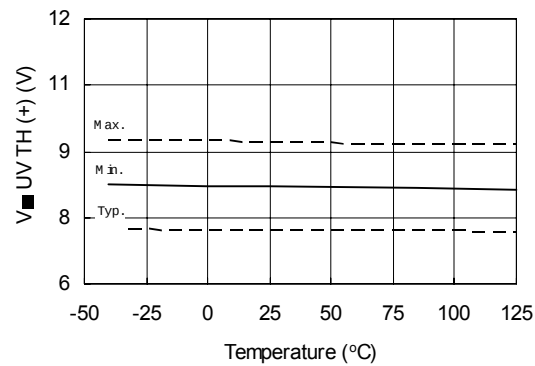


Figure 39B. IR2133/IR2233 V_{BS} Undervoltage Threshold (-) vs. Temperature

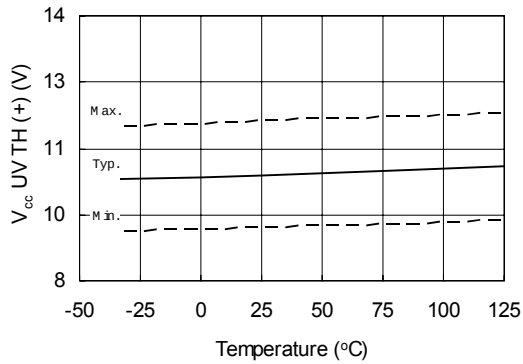


Figure 40A. IR2135/IR2235 V_{cc} Undervoltage Threshold (+) vs. Temperature

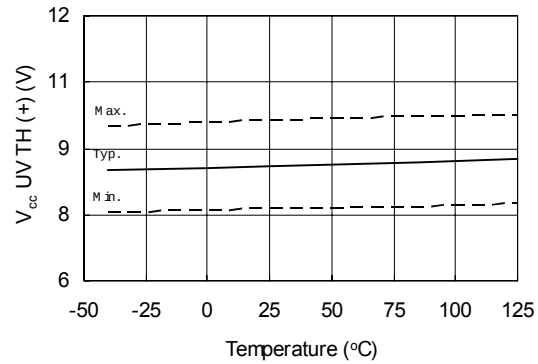


Figure 40B. IR2133/IR2233 V_{cc} Undervoltage Threshold (+) vs. Temperature



Figure 41A. IR2135/IR2235 V_{cc} Undervoltage Threshold (-) vs. Temperature

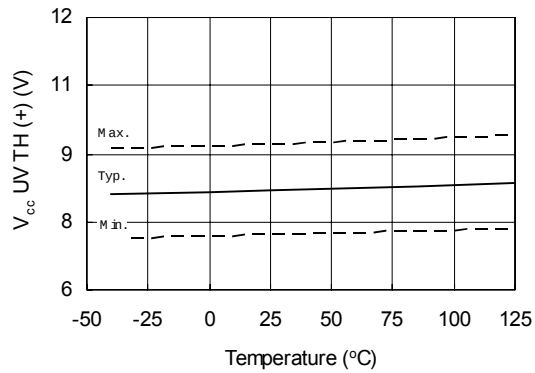


Figure 41B. IR2133/IR2233 V_{cc} Undervoltage Threshold (-) vs. Temperature

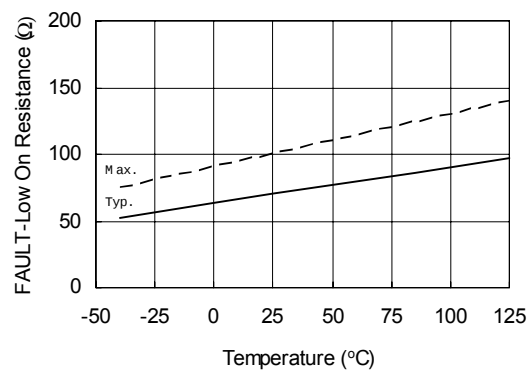


Figure 42A. FAULT- Low On Resistance vs. Temperature

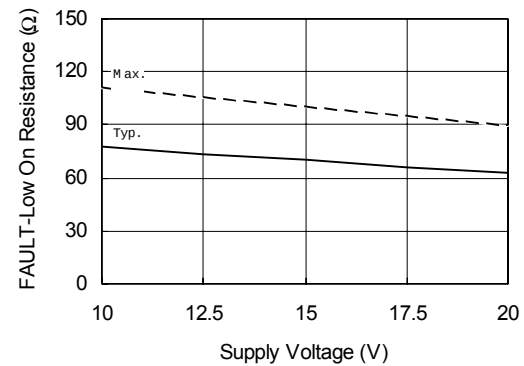


Figure 42B. FAULT- Low On Resistance vs. Supply Voltage

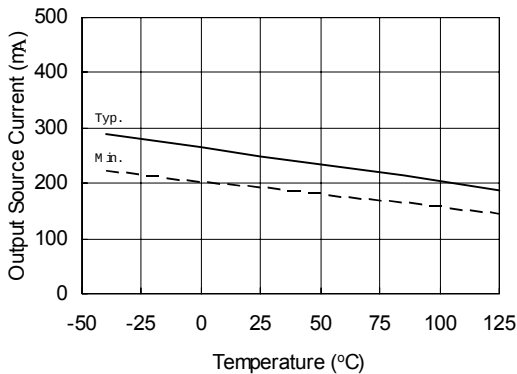


Figure 43A. Output Source Current vs. Temperature

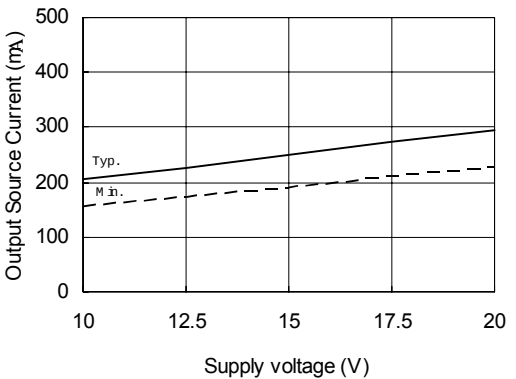


Figure 43B. Output Source Current vs. Supply Voltage

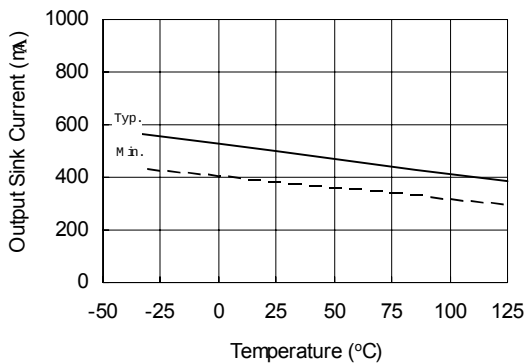


Figure 44A. Ourput Sink Current vs. Temperature

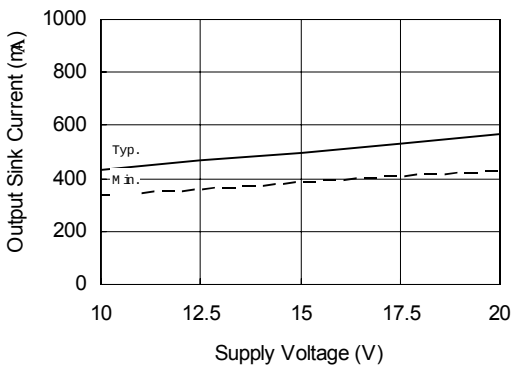


Figure 44B. Ourput Sink Current vs. Supply Voltage



Figure 45A. Amplifier Input Offset Voltage vs. Temperature



Figure 45B. Amplifier Input Offset Voltage vs. Supply Voltage



Figure 46A. Amplifier Common Mode Rejection Ratio vs. Temperature



Figure 46B. Amplifier Common Mode Rejection Ratio vs. Supply Voltage



Figure 47A. Amplifier Power Supply Rejection Ratio vs. Temperature



Figure 47B. Amplifier Power Supply Rejection Ratio vs. Supply Voltage



Figure 48. Amplifier High Level Output Voltage vs. Supply Voltage



Figure 49. Amplifier Low Level Output Voltage vs. Supply Voltage



Figure 50. Amplifier Output Source Current vs. Supply Voltage

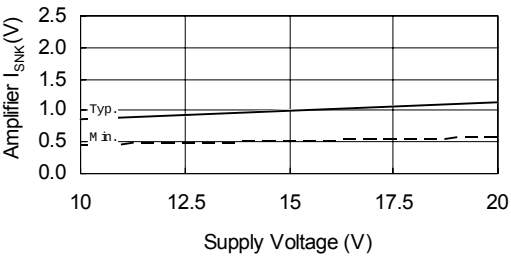


Figure 51. Amplifier Output Sink Current vs. Supply Voltage

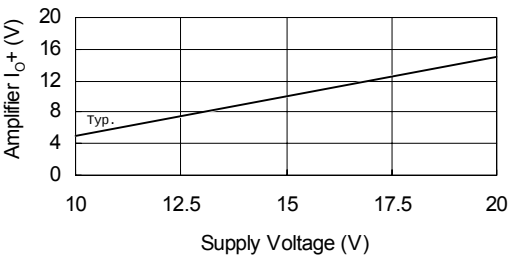


Figure 52. Amplifier Output High Short Circuit Current vs. Supply Voltage

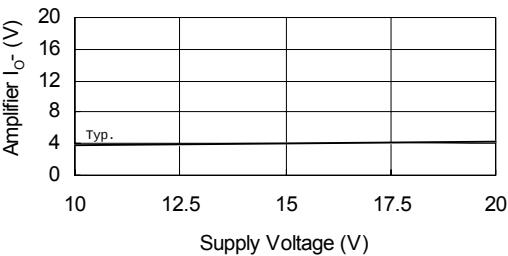


Figure 53. Amplifier Output Low Short Circuit Current vs. Supply Voltage



Figure 7. IR2133J Junction Temperature vs Frequency Driving (IRGPC20KD2) Rgate = 5.1Ω @ Vcc = 15V

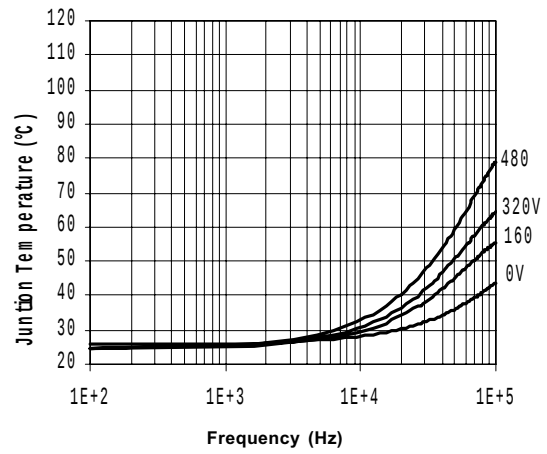


Figure 8. IR2133J Junction Temperature vs Frequency Driving (IRGPC30KD2) Rgate = 5.1Ω @ Vcc = 15V



Figure 9. IR2133J Junction Temperature vs Frequency Driving (IRGPC40KD2) Rgate = 5.1Ω @ Vcc = 15V

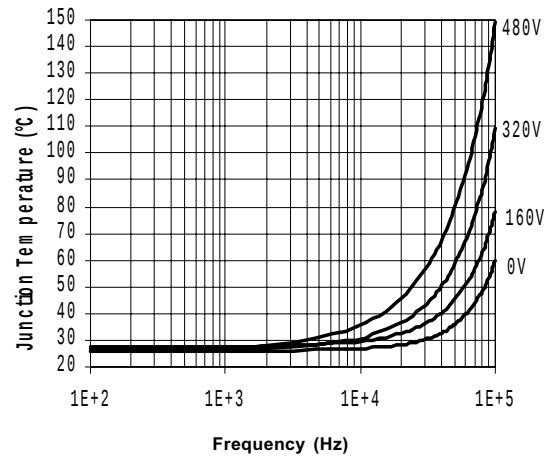


Figure 10. IR2133J Junction Temperature vs Frequency Driving (IRGPC50KD2) Rgate = 5.1Ω @ Vcc = 15V

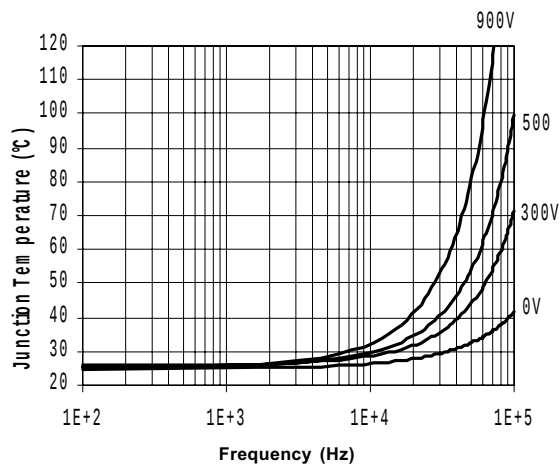


Figure 11. IR2233J Junction Temperature vs Frequency Driving (IRG4PH30KD) $R_{gate} = 20\Omega$ @ $V_{cc} = 15V$

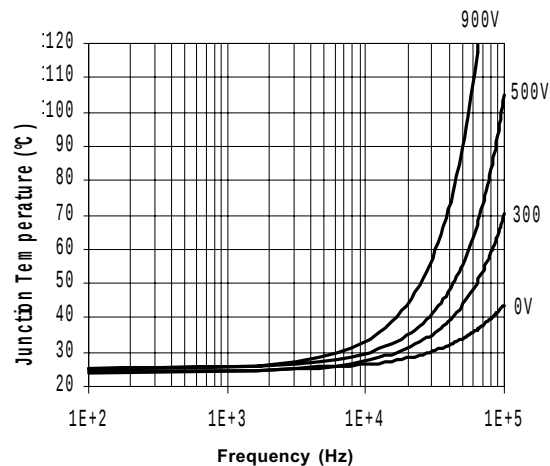


Figure 12. IR2233J Junction Temperature vs Frequency Driving (IRG4PH40KD) $R_{gate} = 15\Omega$ @ $V_{cc} = 15V$

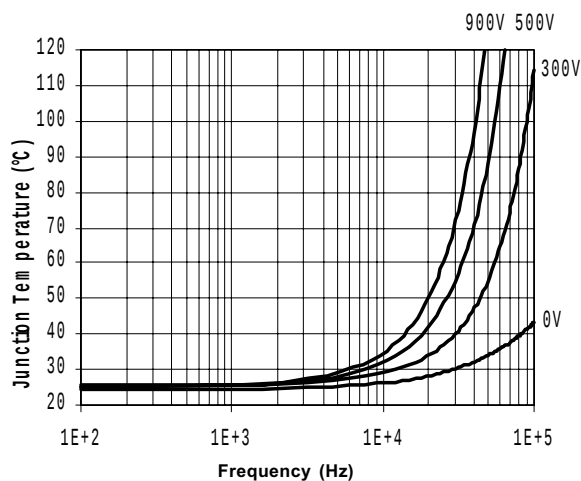


Figure 13. IR2233J Junction Temperature vs Frequency Driving (IRG4PH50KD) $R_{gate} = 10\Omega$ @ $V_{cc} = 15V$


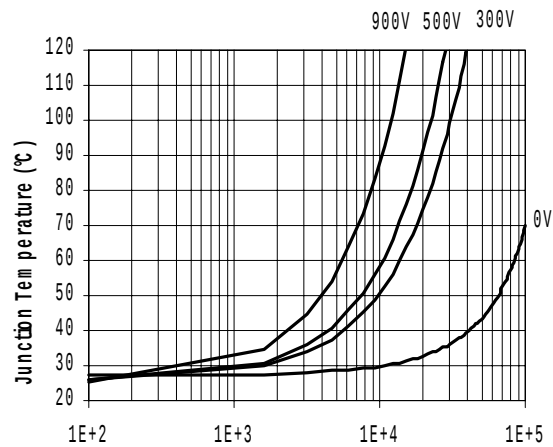



Figure 14. IR2233J Junction Temperature vs Frequency Driving (IRG4ZH71KD) $R_{gate} = 5\Omega$ @ $V_{cc} = 15V$

Package Dimensions

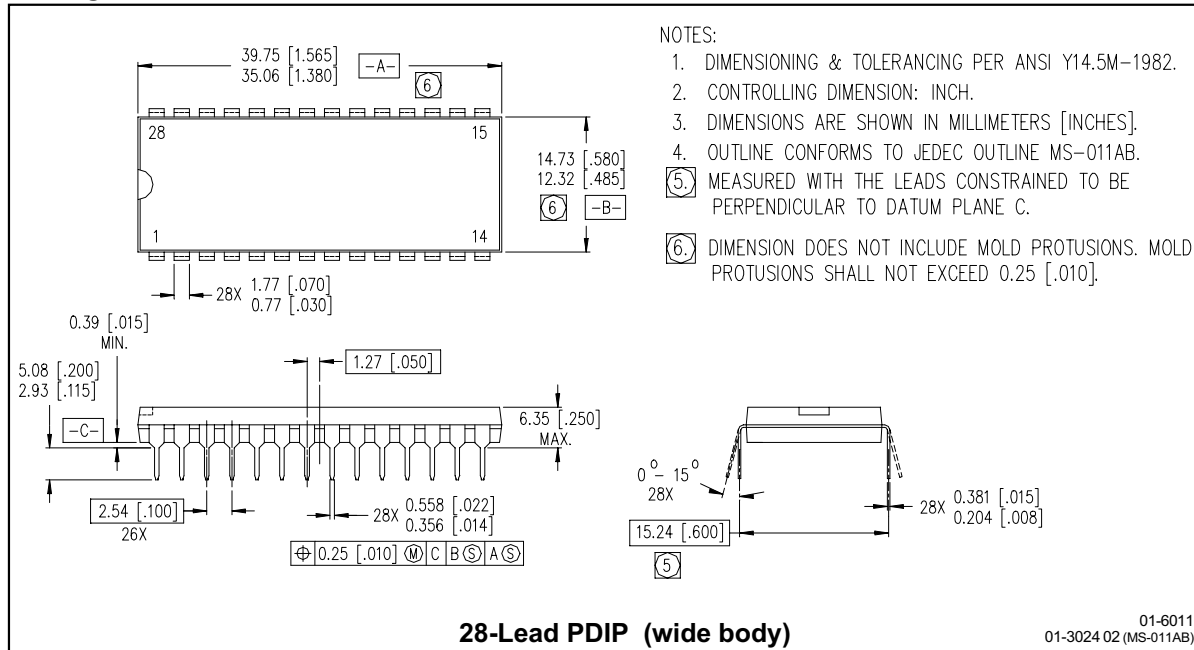

NOTES:

1. DIMENSIONING & TOLERANCING PER ANSI Y14.5M-1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
4. OUTLINE CONFORMS TO JEDEC OUTLINE MS-011AB.
5. MEASURED WITH THE LEADS CONSTRAINED TO BE PERPENDICULAR TO DATUM PLANE C.
6. DIMENSION DOES NOT INCLUDE MOLD PROTUSIONS. MOLD PROTUSIONS SHALL NOT EXCEED 0.25 [0.010].

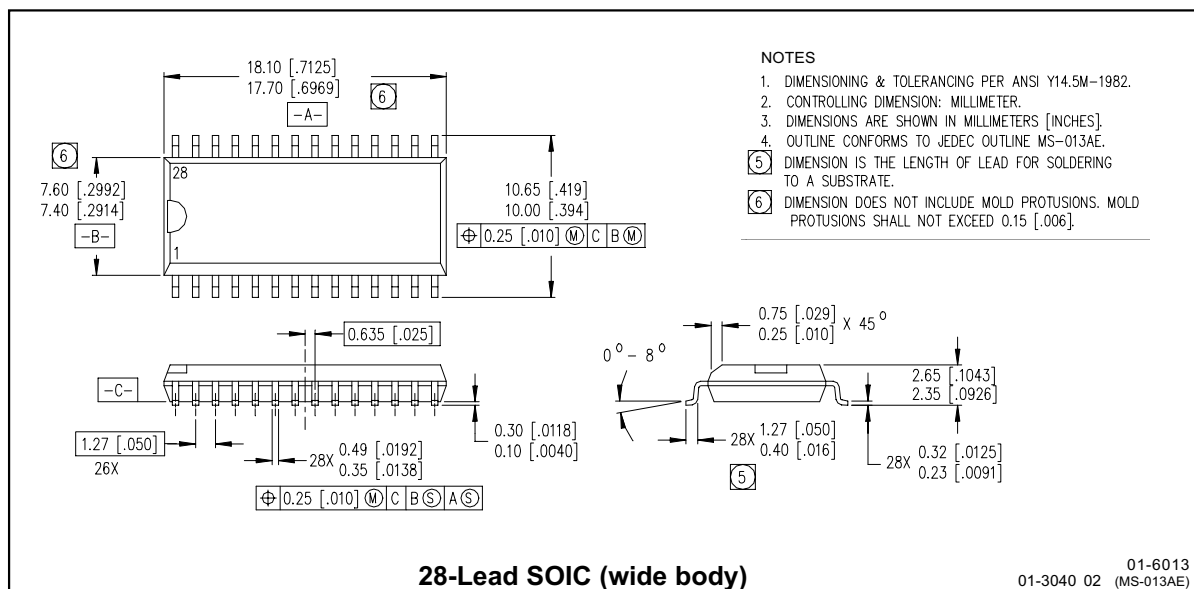


NOTES

1. DIMENSIONING & TOLERANCING PER ANSI Y14.5M-1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
4. OUTLINE CONFORMS TO JEDEC OUTLINE MS-013AE.
5. DIMENSION IS THE LENGTH OF LEAD FOR SOLDERING TO A SUBSTRATE.
6. DIMENSION DOES NOT INCLUDE MOLD PROTUSIONS. MOLD PROTUSIONS SHALL NOT EXCEED 0.15 [0.006].


IR2133/IR2135/IR2233/IR2235(J&S)&(PbF)

International
IR Rectifier

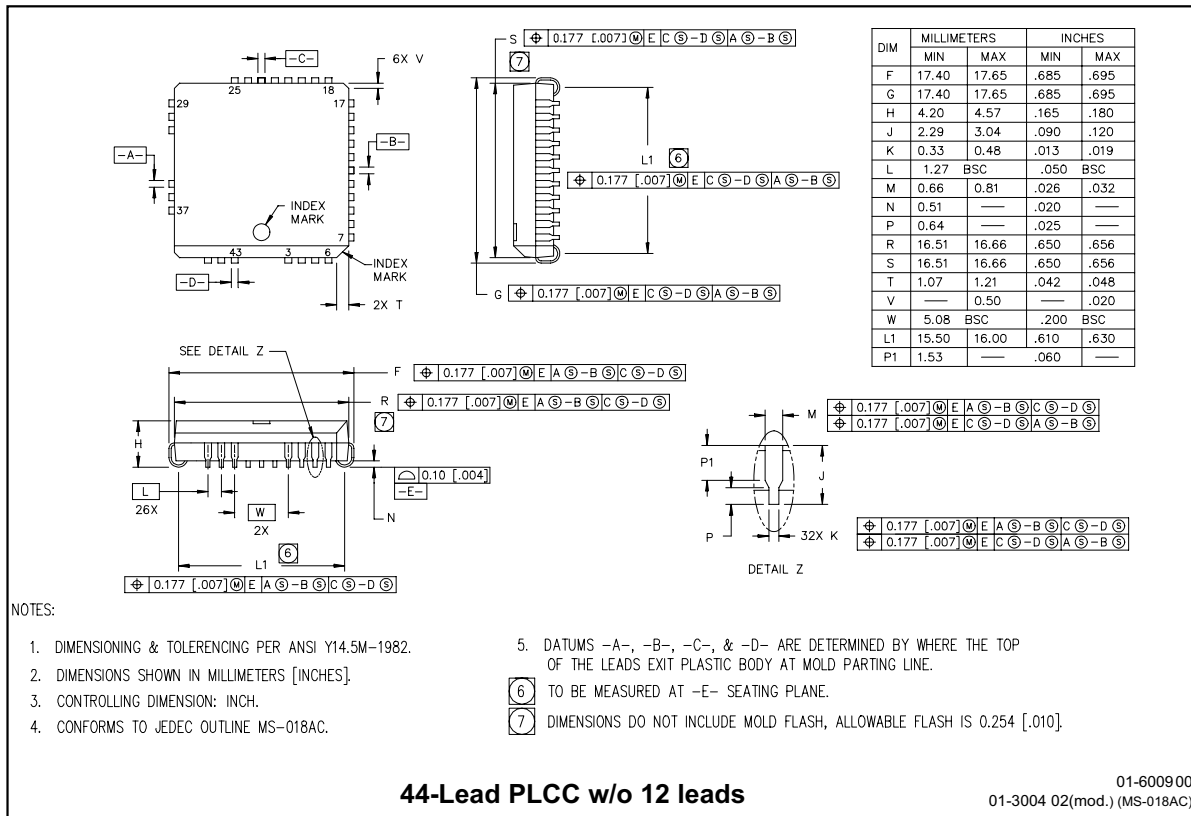

IR2133/IR2135/IR2233/IR2235(J&S)&(PbF)

LEADFREE PART MARKING INFORMATION

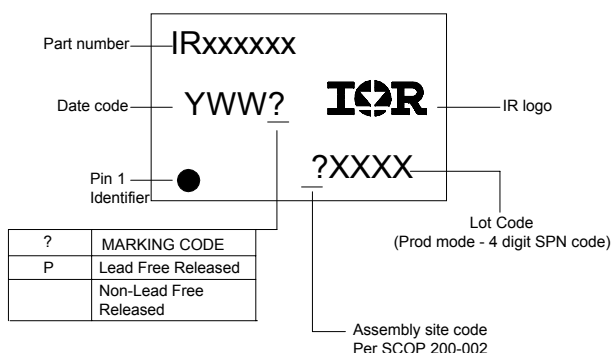

ORDER INFORMATION

Basic Part (Non-Lead Free)

28-Lead	PDIP	IR2133	order	IR2133 2
8-Lead	SOIC	IR2133S	order	IR2133S
28-Lead	PDIP	IR2135	order	IR2135
28-Lead	SOIC	IR2135S	order	IR2135S
28-Lead	PDIP	IR2233	not available	
28-Lead	SOIC	IR2233S	order	IR2233S
28-Lead	PDIP	IR2235	not available	
28-Lead	SOIC	IR2235S	order	IR2235S
44-Lead	PLCC	IR2133J	order	IR2133J
44-Lead	PLCC	IR2135J	order	IR2135J
44-Lead	PLCC	IR2233J	order	IR2233J
44-Lead	PLCC	IR2235J	order	IR2235J

Leadfree Part

28-Lead	PDIP	IR2133	order	IR2133PbF
28-Lead	SOIC	IR2133S	order	IR2133SPbF
28-Lead	PDIP	IR2135	order	IR2135PbF
28-Lead	SOIC	IR2135S	order	IR2135SPbF
28-Lead	PDIP	IR2233	order	IR2233PbF
28-Lead	SOIC	IR2233S	order	IR2233SPbF
28-Lead	PDIP	IR2235	order	IR2235PbF
28-Lead	SOIC	IR2235S	order	IR2235SPbF
44-Lead	PLCC	IR2133J	order	IR2133JPbF
44-Lead	PLCC	IR2135J	order	IR2135JPbF
44-Lead	PLCC	IR2233J	order	IR2233JPbF
44-Lead	PLCC	IR2235J	order	IR2235JPbF