■ Scope

This specification is applied to following safety standard certified Chip Multilayer Ceramic Capacitors Type GF. Type GF is safety standard certified Chip Multilayer Ceramic Capacitors of IEC60384-14 Class:Y2, ClassX1/Y2.

＜Standard No/*Certificate No＞

Size:4.5x2.0mm UL,cUL:UL60384-14,CSA E60384-14/E37921,SEMKO:EN IEC 60384-14/SE-S-2500085,CQC:GB/T6346.14 /CQC25001460323
UL,cUL:UL60950-1,CSA C22.2/E316111(Certified except for insulating distance and applicabie only for the instruments critified by UL60950-1.)

Size:5.7x2.8mm Min. UL,cUL:UL60384-14,CSA E60384-14/E37921,SEMKO:EN IEC 60384-14/SE-S-2500085、CQC:GB/T6346.14 /CQC25001460323,VDE:EN IEC 60384-14/40024096

*Above Certificate No. may be changed on account of the revision of standards and the renewal of certification.

1.Specific applications:

・Consumer Equipment: Products that can be used in consumer equipment such as home appliances, audio/visual equipment, communication equipment, information equipment, office equipment, and household robotics, and whose functions are not directly related to the protection of human life and property.

・Industrial Equipment: Products that can be used in industrial equipment such as base stations, manufacturing equipment, industrial robotics equipment, and measurement equipment, and whose functions do not directly relate to the protection of human life and property.

・Medial Equipment [GHTF A/B/C] except for Implant Equipment: Products suitable for use in medical devices designated under the GHTF international classifications as Class A or Class B (the functions of which are not directly involved in protection of human life or property) or in medical devices other than implants designated under the GHTF international classifications as Class C (the malfunctioning of which is considered to pose a comparatively high risk to the human body).

・Automotive Infotainment/Comfort Equipment: Products that can be used for automotive equipment such as car navigation systems and car audio systems that do not directly relate to human life and whose structure, equipment, and performance are not specifically required by law to meet technical standards for safety assurance or environmental protection.

2.Unsuitable Application: Applications listed in “Limitation of applications” in this specification.

WE DISCLAIM ANY LOSS AND DAMAGES ARISING FROM OR IN CONNECTION WITH THE PRODUCTS INCLUDING BUT NOT LIMITED TO THE CASE SUCH LOSS AND DAMAGES CAUSED BY THE UNEXPECTED ACCIDENT, IN EVENT THAT THE PRODUCT IS APPLIED FOR THE PURPOSE WHICH IS SPECIFIED ABOVE AS THE UNSUITABLE APPLICATION FOR THE PRODUCT.

Downloaded from Arrow.com.

Product specifications in this catalog are as of Apr.3,2026, and are subject to change or obsolescence without notice.
Please consult the approval sheet before ordering. Please read rating and !Cautions first.

<Reference> Please kindly use our website.
Please refer to the product information page for more information on ceramic capacitors. → Ceramic capacitor product information
Various data can be obtained directly from the product search. → Product search (SMD)

■ MURATA Part No. System

(Ex.)	GA3	52	Q	R7	GF	681	K	W01	L
	①Series	②Dimension (L×W)	③Dimension (T)	④Temperature Characteristics	⑤Certified Type	⑥Capacitance	⑦Capacitance Tolerance	⑧Individual Specification	⑨Package

■ Type & Dimension




image:Dimension



image:Marking

Size Code : 5728M(2211) (in mm)

② L	② W	③ T	e	g
5.7+/-0.4	2.8+/-0.3	1.5+0/-0.3	0.3 min.	4.0 min.

■ Rated Value

④Temperature Characteristics [R7] (Public STD Code : [X7R(EIA)])			⑤Rated Voltage	⑥ Capacitance	⑦ Capacitance Tolerance	Operating Temp. Range	Mounting Method
Temp. coeff. or Cap. Change	Temp. Range	Ref.Temp.					
-15 to 15 %	-55 to 125℃	25℃	AC 250V DC 1000V	680pF	+/-10%	-55 to 125℃	Reflow


⑧Individual Specification : This denotes Murata control code.

■ Package

⑨Package	Packaging	Standard Packing Quantity
L	φ180mm Reel Plastic Tape W12P8	1000 pcs./Reel
K	φ330mm Reel Plastic Tape W12P8	4000 pcs./Reel

Downloaded from Arrow.com.

■ **Specifications and Test Methods**

No	Item	Specification	Test Method(Ref. Standard:JIS C 5101 (all parts), IEC60384 (all parts))
1	Visual examination	No defects or abnormalities.	Visual inspection
2	Dimensions	Shown in Dimension.	Using Measuring instrument of dimension.
3	Voltage proof	No defects or abnormalities.	Measurement Point: Between the terminations Test Voltage: AC2000Vrms Applied Time: 60+/-1s Charge/discharge current: 50mA max.
4	Voltage proof 2	No defects or abnormalities.	Measurement Point: Between the terminations Test Voltage: DC2150V Applied Time: 60+/-1s Charge/discharge current: 50mA max.
5	Impulse voltage	No self healing break downs or flash-overs have taken place in the capacitor.	Waveform  Front time (T1) = 1.7μs=1.67T Time to half-value (T2) = 50μs Applied Times: 10 impulse of alternating polarity is subjected. (5 impulse for each polarity) The interval between impulse is 60seconds. Applied Voltage: 2.5kVo-p
6	Insulation Resistance (IR) (Room Temperature)	More than 6000MΩ	Measurement Temperature: Room Temperature Measurement Point: Between the terminations Measurement Voltage: DC500+/-50V Charging Time: 60+/-5s Charge/discharge current: 50mA max.
7	Capacitance	Shown in Rated value.	Measurement Temperature: Room Temperature Measurement Frequency: 1.0+/-0.1kHz Measurement Voltage: 1.0+/-0.2Vrms
8	Q or Dissipation Factor (DF)	DF≦0.025	Measurement Temperature: Room Temperature Measurement Frequency: 1.0+/-0.1kHz Measurement Voltage: 1.0+/-0.2Vrms

Downloaded from Arrow.com.

■ **Specifications and Test Methods**

<table>
<tr><th>No</th><th>Item</th><th colspan="2">Specification</th><th colspan="2">Test Method(Ref. Standard:JIS C 5101 (all parts), IEC60384 (all parts))</th></tr>
<tr><td>9</td><td>Temperature Characteristics of Capacitance</td><td>No bias</td><td>Shown in Rated value.</td><td colspan="2">The capacitance change should be measured after 5 min at each specified temp. stage.
Capacitance value as a reference is the value in "*" marked step.
Measurement Voltage: Less than 1.0Vrms (Refer to the individual data sheet)
Pre-treatment: Heat treatment:Perform a heat treatment at 150+0/-10°C for 1hour and then let sit for 24+/-2hours at room temperature, then measure.
Temperature Step
< No bias >
<table>
<tr><th>Step</th><th>Temperature(°C)</th></tr>
<tr><td>1</td><td>Reference Temp. +/-2</td></tr>
<tr><td>2</td><td>Min. Operating Temp. +/-3</td></tr>
<tr><td>3 *</td><td>Reference Temp. +/-2</td></tr>
<tr><td>4</td><td>Max. Operating Temp. +/-3</td></tr>
<tr><td>5</td><td>Reference Temp. +/-2</td></tr>
</table></td></tr>
<tr><td>10</td><td>Shear test</td><td colspan="2">No removal of the terminations.</td><td colspan="2">Mounting method: Reflow solder the capacitor on the test substrate
Applied Force: 10N
Holding Time: 10+/-1s
Applied Direction: In parallel with the test substrate and vertical with the capacitor side</td></tr>
<tr><td>11</td><td>Vibration</td><td>Visual examination
Capacitance
Q or D.F.</td><td>No defects or abnormalities.
Within the specified initial value.
Within the specified initial value.</td><td colspan="2">Mounting method: Solder the capacitor on the test substrate
Kind of Vibration: A simple harmonic motion 10Hz to 55Hz to 10Hz
Vibration Time: 1min
Total amplitude: 1.5mm
Vibration directions and time: This motion should be applied for a period of 2hours in each 3 mutually perpendicular directions(total of 6hours).</td></tr>
<tr><td>12</td><td>Substrate Bending test</td><td>Visual examination
Capacitance Change</td><td>No defects or abnormalities.
Within +/-12.5%</td><td colspan="2">Mounting method: Reflow solder the capacitor on the test substrate(100×40mm)
Flexure: 1mm
Holding Time: 5+/-1s</td></tr>
<tr><td>13</td><td>Solderability</td><td colspan="2">95% of the terminations is to be soldered evenly and continuously.</td><td colspan="2">Test Method: Solder bath method
Flux: Solution of rosin ethanol 25(mass)%
Preheat: 80℃ to 120℃、10s to 30s
Kind of Solder: Sn-3.0Ag-0.5Cu(Lead Free Solder)
Test Temperature: 245+/-5℃
Test Time: 2+/-0.5s
Immersing in speed: 25+/-2.5mm/s</td></tr>
<tr><td>14</td><td>Resistance to Soldering Heat</td><td>Visual examination
Capacitance Change
I.R.
Voltage proof</td><td>No defects or abnormalities.
Within +/-10%
More than 1000MΩ
No defects or abnormalities.</td><td colspan="2">Pre-treatment: Heat treatment:Perform a heat treatment at 150+0/-10°C for 1hour and then let sit for 24+/-2hours at room temperature, then measure.
Test Method: Solder bath method
Kind of Solder: Sn-3.0Ag-0.5Cu(Lead Free Solder)
Test Temperature: 260+/-5℃
Test Time: 10+/-1s
Preheat Temperature: 100℃ to 120℃ and 170℃ to 200℃
Preheat time: Each 1 min
Immersing in speed: 25+/-2.5mm/s
Post-treatment: Non treatment:Let sit for 24+/-2hours at room temperature, then measure.</td></tr>
</table>

Downloaded from Arrow.com.

■ **Specifications and Test Methods**

<table>
<tr><th>No</th><th>Item</th><th colspan="2">Specification</th><th colspan="2">Test Method(Ref. Standard:JIS C 5101 (all parts), IEC60384 (all parts))</th></tr>
<tr><td>15</td><td>Rapid change of temperature</td><td>Visual examination
Capacitance Change
Q or D.F.
I.R.
Voltage proof</td><td>No defects or abnormalities.
Within +/-15%
DF≦0.05
More than 3000MΩ
No defects or abnormalities.</td><td>Mounting method
Pre-treatment

Cycles
Temperature Cycling

Post-treatment</td><td>Solder the capacitor on the test substrate
Heat treatment:Perform a heat treatment at 150+0/-10°C for 1hour and then let sit for 24+/-2hours at room temperature, then measure.
5cycles
<table><tr><th>Step</th><th>Temp. (℃)</th><th>Time(min)</th></tr><tr><td>1</td><td>Min.Operating Temp.+0/-3</td><td>30+/-3</td></tr><tr><td>2</td><td>Room Temp.</td><td>2 to 3</td></tr><tr><td>3</td><td>Max.Operating Temp.+3/-0</td><td>30+/-3</td></tr><tr><td>4</td><td>Room Temp.</td><td>2 to 3</td></tr></table>Non treatment:Let sit for 24+/-2hours at room temperature, then measure.</td></tr>
<tr><td>16</td><td>Damp heat, steady state</td><td>Visual examination
Capacitance Change
Q or D.F.
I.R.
Voltage proof</td><td>No defects or abnormalities.
Within +/-15%
DF≦0.05
More than 3000MΩ
No defects or abnormalities.</td><td>Mounting method
Pre-test

Pre-treatment


Test Temperature
Test Humidity
Test Time
Test Voltage
Charge/discharge current
Post-treatment</td><td>Solder the capacitor on the test substrate
Before this test, the test shown in the following is performed.
・Shear test(apply force : 5N)
・Substrate Bending test
Heat treatment:Perform a heat treatment at 150+0/-10°C for 1hour and then let sit for 24+/-2hours at room temperature, then measure.
40+/-2℃
90%RH to 95%RH
500+24/-0h
AC250Vrms(Rated Voltage)
50mA max.
Non treatment:Let sit for 24+/-2hours at room temperature, then measure.</td></tr>
<tr><td>17</td><td>Damp heat, steady state 2</td><td>Visual examination
Capacitance Change
Q or D.F.
I.R.
Voltage proof</td><td>No defects or abnormalities.
Within +/-15%
DF≦0.05
More than 3000MΩ
No defects or abnormalities.</td><td>Mounting method
Pre-test

Pre-treatment

Test Temperature
Test Humidity
Test Time
Test Voltage
Charge/discharge current
Post-treatment</td><td>Solder the capacitor on the test substrate
Before this test, the test shown in the following is performed.
・Shear test(apply force : 5N)
・Substrate Bending test
Heat treatment:Perform a heat treatment at 150+0/-10°C for 1hour and then let sit for 24+/-2hours at room temperature, then measure.
40+/-2℃
90%RH to 95%RH
500+24/-0h
DC1000V(Rated Voltage)
50mA max.
Non treatment:Let sit for 24+/-2hours at room temperature, then measure.</td></tr>
</table>



Downloaded from Arrow.com.

■ **Specifications and Test Methods**

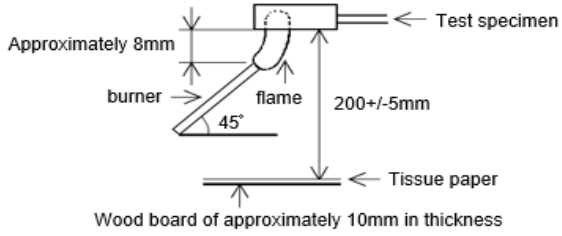No	Item	Specification		Test Method(Ref. Standard:JIS C 5101 (all parts), IEC60384 (all parts))	
18	Endurance	Visual examination	No defects or abnormalities.	Mounting method	Solder the capacitor on the test substrate
		Capacitance Change	Within +/-20%	Pre-test	Before this test, the test shown in the following is performed. ・Shear test(apply force : 5N) ・Substrate Bending test ・Impulse voltage (Applied Voltage:5kVo-p, Applied Times:3 times)
		Q or D.F.	DF≦0.05	Pre-treatment	Heat treatment:Perform a heat treatment at 150+0/-10°C for 1hour and then let sit for 24+/-2hours at room temperature, then measure.
		I.R.	More than 3000MΩ	Test Temperature	125+2/-0℃
		Voltage proof	No defects or abnormalities.	Test Humidity	50%RH max.
				Test Time	1000+48/-0h
				Test Voltage	AC425Vrms (except that once each hour the voltage is increased to AC1000Vrms for 0.1second.)
				Charge/discharge current	50mA max.
				Post-treatment	Non treatment:Let sit for 24+/-2hours at room temperature, then measure.
19	Endurance 2	Visual examination	No defects or abnormalities.	Mounting method	Solder the capacitor on the test substrate
		Capacitance Change	Within +/-20%	Pre-treatment	Heat treatment:Perform a heat treatment at 150+0/-10°C for 1hour and then let sit for 24+/-2hours at room temperature, then measure.
		Q or D.F.	DF≦0.05	Pre-test	Before this test, the test shown in the following is performed. ・Shear test(apply force : 5N) ・Substrate Bending test ・Impulse voltage (Applied Voltage:5kVo-p, Applied Times:3 times)
		I.R.	More than 3000MΩ	Test Temperature	125+2/-0℃
		Voltage proof	No defects or abnormalities.	Test Humidity	50%RH max.
				Test Time	1000+48/-0h
				Test Voltage	DC1700V
				Charge/discharge current	50mA max.
				Post-treatment	Non treatment:Let sit for 24+/-2hours at room temperature, then measure.
20	Passive flammability	The burning time shall not be exceeded the time 30s. The tissue paper shall not ignite.		The capacitor under test shall be held in the flame in the position which best promotes burning. Each specimen shall only be exposed once to the flame. Time of exposure to flame : 30 s. Length of flame : 12+/-1mm Gas burner : Length 35mm min. Inside dia 0.5+/-0.1mm Outside dia 0.9mm max. Gas : Butane gas purity 95% min. Test method (schematic) : 	

Downloaded from Arrow.com.

■ **Specifications and Test Methods**

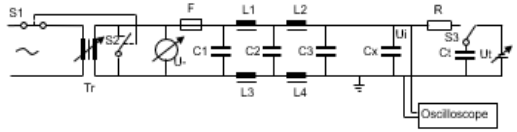No	Item	Specification	Test Method(Ref. Standard:JIS C 5101 (all parts), IEC60384 (all parts))
21	Active flammability	The cheesecloth shall not be on fire.	The specimens shall be individually wrapped in at least one but more than two complete layers of cheesecloth. The specimens shall be subjected to 20discharges. The interval between successive discharges shall be 5seconds. The UAC shall be maintained for 2minutes after the last discharge. Test circuit diagram  C1,C2 : Filter capacitor 1μF+/-10% C3 : Capacitor 0.033μF+/-5% L1 to L4 : Rod coa choke 1.5mH+/-20%, 16A R : Resistor 100Ω+/-2% Cx＜0.068μF Ct : Tank capacitor 3μF+/-5% 10kV Cx≦1μF U- : UR+/-5% UR : Rated Voltage Cx : Capacitor under test F : Slow-blow fuse, rated 16A Ut : Voltage to which the tank capacitor Ct is charged Discharge voltage waveform 

Regarding high dielectric constant type capacitors, if it's doubt about the judgment, perform a heat treatment at 150+0/-10℃ for 1hour and then let sit for 24+/-2hours at room temperature, then measure.

Downloaded from Arrow.com.

Substrate Bending test

・Test substrate

Material	JIS C 6484 Copper-clad laminated sheets for PCBs (Glass fabric base, epoxy resin)
Thickness	1.6mm
Copper Foil Thickness	0.035mm
Kind of Solder	Sn-3.0Ag-0.5Cu(Lead Free Solder)

・Land Dimension




Fig.1

Type	Dimension(mm)		
	a	b	c
GA352	4.5	8.0	3.2

・Pressurization Method

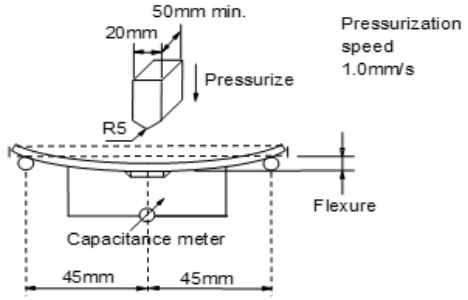


Fig.2

Except for Substrate Bending test

・Test substrate

Material	JIS C 6484 Copper-clad laminated sheets for PCBs (Glass fabric base, epoxy resin)
Thickness	1.6mm
Copper Foil Thickness	0.035mm
Kind of Solder	Sn-3.0Ag-0.5Cu(Lead Free Solder)

・Land Dimension




Fig.3

Type	Dimension(mm)		
	a	b	c
GA352	4.5	8.0	3.2


Downloaded from Arrow.com.

■ Package（Tape Carrier Packaging）

1. Minimum Quantity(pcs./reel)

Type		φ180mm Reel(W12P8)	φ330mm Reel(W12P8)
		Plastic Tape	Plastic Tape
		CODE：L	CODE：K
GA352	Q	1000	4000

2. Dimensions of Tape (in mm)
(1)GA352(W12P8 CODE：K/L)

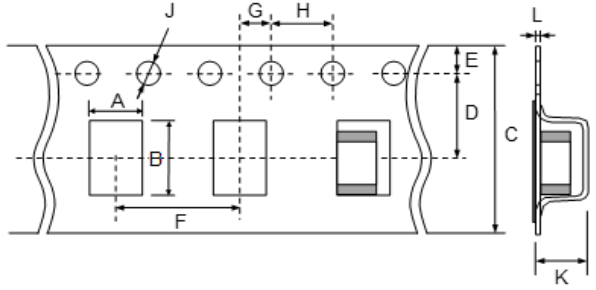


Type		Dimensions(Chip)			A	B	C	D	E	F	G	H	J	K	L
		L	W	T											
GA352	Q	5.7+/-0.4	2.8+/-0.3	1.5+0/-0.3	3.2(Typ.)	6.1(Typ.)	12.0+/-0.3	5.5+/-0.05	1.75+/-0.1	8.0+/-0.1	2.0+/-0.05	4.0+/-0.1	φ1.5+0.1/-0	3.7 max.	0.3+/-0.1

Downloaded from Arrow.com.

■ Package（Tape Carrier Packaging）

3. Dimensions of Reel (in mm)

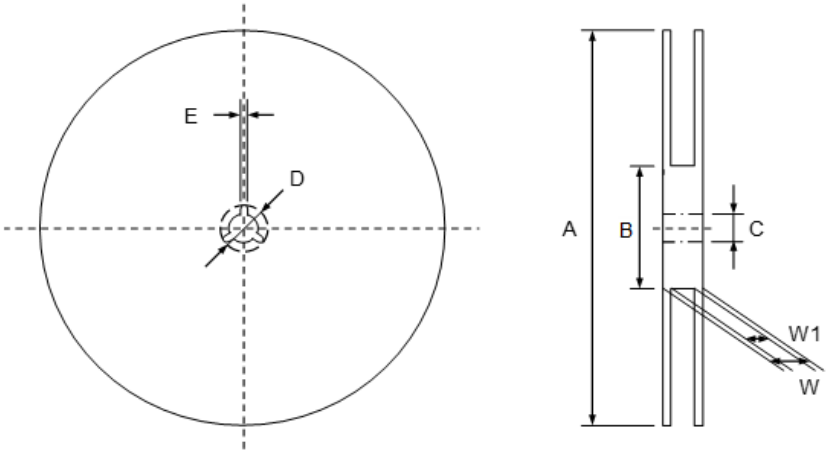


Reel	A	B	C	D	E	W	W1
φ180mm Reel	φ180+0/-3.0	φ60 min.	φ13+/-0.2	φ21+/-0.8	2.0+/-0.5	18.4 max.	12.4+2
φ330mm Reel	φ330+/-2.0	φ60 min.	φ13+/-0.2	φ21+/-0.8	2.0+/-0.5	18.4 max.	12.4+2

Downloaded from Arrow.com.

■ Package（Tape Carrier Packaging）

4. Part of the leader and part of the vacant section are attached as follows.
   The sprocket holes are to the right as the tape is pulled toward the user.

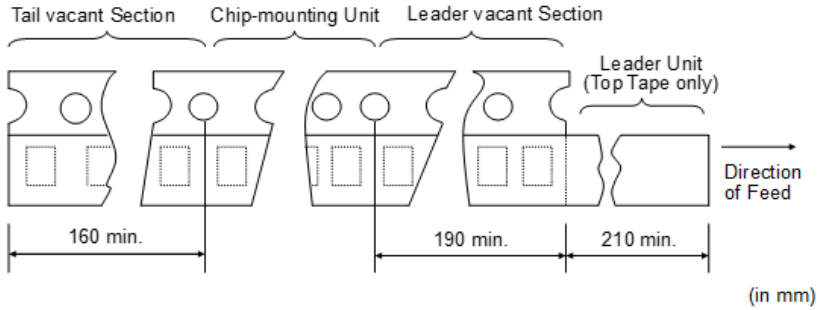

5. Accumulate tolerance of sprocket holes pitch = +/-0.3mm/10 pitch

6. Chip in the tape is enclosed by top tape and bottom tape as shown in 2.Dimensions of Tape.

7. The top tape and carrier tape are not attached at the end of the tape for a minimum of 5 pitches.

8. There are no jointing for top tape and bottom tape.


9. There are no fuzz in the cavity.

10. Break down force of top tape : 5N min.
    Break down force of bottom tape : 5N min. (Only a bottom tape existence)

11. Reel is made by resin and appeaser and dimension is shown in 3.Dimensions of Reel.
    There are possibly to change the material and dimension due to some impairment.

12. Peeling off force : 0.1N to 0.7N in the direction as shown below.

    Speed of Peeling off : 300 mm / min

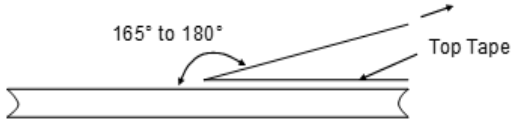

13. Label that show the customer parts number, our parts number, our company name, inspection number and quantity, will be put in outside of reel.

Downloaded from Arrow.com.

⚠ Caution

■Limitation of Applications

The products listed in the Specification(hereinafter the product(s) is called as the “Product(s)”) are designed and manufactured for applications specified in the Specification. (hereinafter called as the “Specific Application”).
We shall not warrant anything in connection with the Products including fitness, performance, adequateness, safety, or quality, in the case of applications listed in from (1) to (11) written at the end of this precautions, which may generally require high performance, function, quality, management of production or safety. Therefore, the Product shall be applied in compliance with the specific application.
WE DISCLAIM ANY LOSS AND DAMAGES ARISING FROM OR IN CONNECTION WITH THE PRODUCTS INCLUDING BUT NOT LIMITED TO THE CASE SUCH LOSS AND DAMAGES CAUSED BY THE UNEXPECTED ACCIDENT, IN EVENT THAT (i) THE PRODUCT IS APPLIED FOR THE PURPOSE WHICH IS NOT SPECIFIED AS THE SPECIFIC APPLICATION FOR THE PRODUCT, AND/OR (ii) THE PRODUCT IS APPLIED FOR ANY FOLLOWING APPLICATION PURPOSES FROM (1) TO (11) (EXCEPT THAT SUCH APPLICATION PURPOSE IS UNAMBIGUOUSLY SPECIFIED AS SPECIFIC APPLICATION FOR THE PRODUCT IN THE SPECIFICATION*).

(1)Aircraft equipment (2)Aerospace equipment (3)Undersea equipment (4)Power plant control equipment (5)Medical equipment (6)Transportation equipment (7)Traffic control equipment (8)Disaster prevention/security equipment (9)Industrial data-processing equipment (10)Combustion/explosion control equipment (11)Equipment with complexity and/or required reliability equivalent to the applications listed in the above.

For exploring information of the Products which will be compatible with the particular purpose other than those specified in the Specification, please contact our sales offices, distribution agents, or trading companies with which you make a deal, or via our web contact form. Contact form: https://www.murata.com/contactform
*We may design and manufacture particular Products for applications listed in (1) to (11). Provided that, in such case we shall unambiguously specify such Specific Application in the Specification without any exception.
Therefore, any other documents and/or performances, whether exist or non-exist, shall not be deemed as the evidence to imply that we accept the applications listed in (1) to (11).

■Storage and Operation condition

1. The performance of chip multilayer ceramic capacitors (henceforth just "capacitors") may be affected by the storage conditions. Please use them promptly after delivery.

1-1. Please maintain an appropriate storage condition for capacitors using the following conditions.
・A temperature is +5℃ to +40℃ and a relative humidity is 20% to 70% as a standard condition.
・The temperature recommendation is less than 30℃.
High temperature and humidity conditions and/or prolonged storage may cause deterioration of the packaging materials. If more than six months have elapsed since delivery, check packaging, mounting, etc. before use.
In addition, this may cause oxidation of the electrodes. If more than one year has elapsed since delivery, also check the solderability before use.

1-2. Corrosive gas can react with the termination (external) electrodes or lead wires of capacitors, and result in poor solderability.
Do not store the capacitors in an atmosphere consisting of corrosive gas (e.g.,hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.).

1-3. Due to moisture condensation caused by rapid humidity changes, or the photochemical change caused by direct sunlight on the terminal electrodes, the solderability and electrical performance may deteriorate.
Do not store capacitors under direct sunlight or in high humidity conditions.

Downloaded from Arrow.com.

■Rating

1. Temperature Dependent Characteristics

1. The electrical characteristics of the capacitor can change with temperature.

1-1. For capacitors having larger temperature dependency, the capacitance may change with temperature changes. The following actions are recommended in order to ensure suitable capacitance values.
(1) Select a suitable capacitance for the operating temperature range.
(2) The capacitance may change within the rated temperature. When you use a high dielectric constant type capacitor in a circuit that needs a tight (narrow) capacitance tolerance (e.g., a time-constant circuit), please carefully consider the temperature characteristics, and carefully confirm the various characteristics in actual use conditions and the actual system.

2. Measurement of Capacitance

1. Measure capacitance with the voltage and frequency specified in the product specifications.

1-1. The output voltage of the measuring equipment may decrease occasionally when capacitance is high. Please confirm whether a prescribed measured voltage is impressed to the capacitor.

1-2. The capacitance values of high dielectric constant type capacitors change depending on the AC voltage applied. Please consider the AC voltage characteristics when selecting a capacitor to be used in a AC circuit.

3. Applied Voltage


1. Do not apply a voltage to the capacitor that exceeds the rated voltage as called out in the specifications.
Applied voltage between the terminals of a capacitor shall be less than or equal to the rated voltage.
When a safety standard certified product is used as a DC voltage product, the AC rated voltage value becomes the DC rated voltage value.
(Example:AC250Vrms rated product can be used as DC250V (+ 10%) rated product.)
If both AC rated voltage and DC rated voltage are specified, apply the voltage lower than the respective rated voltage.

1-1. When a safety standard certified product is used in a circuit connected to a commercial power supply, ensure that the applied commercial power supply voltage including fluctuation should be less than 10% above its rated voltage.

1-2. When using a safety standard certified product as a DC rated product in circuits other than those connected to a commercial power supply.
When AC voltage is superimposed on DC voltage, the zero-to-peak voltage shall not exceed the rated DC voltage.
When AC voltage or pulse voltage is applied, the peak-to-peak voltage shall not exceed the rated DC voltage.

1-3. Abnormal voltages (surge voltage, static electricity, pulse voltage, etc.) shall not exceed the rated DC voltage.
Typical Voltage Applied to the DC Capacitor

Typical Voltage Applied to the DC capacitor

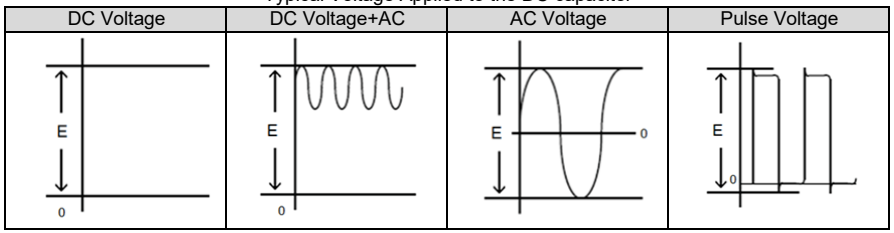

(E：Maximum possible applied voltage.)

2. Influence of over voltage
Over voltage that is applied to the capacitor may result in an electrical short circuit caused by the breakdown of the internal dielectric layers. The time duration until breakdown depends on the applied voltage and the ambient temperature.

3. Use a safety standard certified capacitor in a power supply input circuit (AC filter), as it is also necessary to consider the withstand voltage and impulse withstand voltage defined for each device.

Downloaded from Arrow.com.

4. Type of Applied Voltage and Self-heating Temperature

1. Confirm the operating conditions to make sure that no large current is flowing into the capacitor due to the continuous application of an AC voltage or pulse voltage.
When a DC rated voltage product is used in an AC voltage circuit or a pulse voltage circuit, the AC current or pulse current will flow into the capacitor; therefore check the self-heating condition.
Please confirm the surface temperature of the capacitor so that the temperature remains within the upper limits of the operating temperature, including the rise in temperature due to self-heating.
When the capacitor is used with a high-frequency voltage or pulse voltage, heat may be generated by dielectric loss.

< Applicable to Temperature Characteristic X7R(R7) >

1-1. The load should be contained so that the self-heating of the capacitor body remains below 20°C, when measuring at an ambient temperature of 25°C.
In addition, use a K thermocouple of ø0.1mm with less heat capacity when measuring, and measure in a condition where there is no effect from the radiant heat of other components or air flow caused by convection.
Excessive generation of heat may cause deterioration of the characteristics and reliability of the capacitor.
(Absolutely do not perform measurements while the cooling fan is operating, as an accurate measurement may not be performed.)

5. DC Voltage and AC Voltage Characteristic

1. The capacitance value of a high dielectric constant type capacitor changes depending on the DC voltage applied. Please consider the DC voltage characteristics when a capacitor is selected for use in a DC circuit.

1-1. The capacitance of ceramic capacitors may change sharply depending on the applied voltage. (See figure) Please confirm the following in order to secure the capacitance.

(1) Determine whether the capacitance change caused by the applied voltage is within the allowed range .
(2) In the DC voltage characteristics, the rate of capacitance change becomes larger as voltageincreases, even if the applied voltage is below the rated voltage.
When a high dielectric constant type capacitor is used in a circuit that requires a tight (narrow) capacitance tolerance (e.g., a time constant circuit),
please carefully consider the voltage characteristics, and confirm the various characteristics in the actual operating conditions of the system.


2. The capacitance values of high dielectric constant type capacitors changes depending on the AC voltage applied. Please consider the AC voltage characteristics when selecting a capacitor to be used in an AC circuit.

6. Capacitance Aging

1. The high dielectric constant type capacitors have an Aging characteristic in which the capacitance value decreases with the passage of time. When you use a high dielectric constant type capacitors in a circuit that needs a tight (narrow) capacitance tolerance (e.g., a time-constant circuit), please carefully consider the characteristics of these capacitors, such as their aging, voltage, and temperature characteristics.
In addition, check capacitors using your actual appliances at the intended environment and operating conditions.


7. Vibration and Shock

1. Please confirm the kind of vibration and/or shock, its condition, and any generation of resonance.
Please mount the capacitor so as not to generate resonance, and do not allow any impact on the terminals.



2. Mechanical shock due to being dropped may cause damage or a crack in the dielectric material of the capacitor.
Do not use a dropped capacitor because the quality and reliability may be deteriorated.

3. When printed circuit boards are piled up or handled, the corner of another printed circuit board should not be allowed to hit the capacitor in order to avoid a crack or other damage to the capacitor.



Downloaded from Arrow.com.


■Soldering and Mounting

1. Mounting Position

1. Confirm the best mounting position and direction that minimizes the stress imposed on the capacitor during flexing or bending the printed circuit board.

1-1. Choose a mounting position that minimizes the stress imposed on the chip during flexing or bending of the board.

[Component Direction]

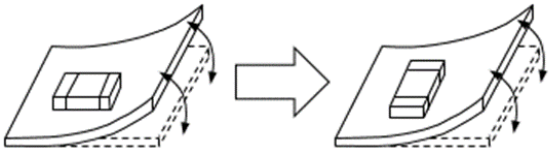

(Bad Example) (Good Example)


Locate chip horizontal to the direction in which stress acts.

[Chip Mounting Close to Board Separation Point]

It is effective to implement the following measures, to reduce stress in separating the board.
It is best to implement all of the following three measures; however, implement as many measures as possible to reduce stress.


Contents of Measures	Stress Level
(1) Turn the mounting direction of the component parallel to the board separation surface.	A > D *1
(2) Add slits in the board separation part.	A > B
(3) Keep the mounting position of the component away from the board separation surface.	A > C

*1 A > D is valid when stress is added vertically to the perforation as with Hand Separation.
If a Cutting Disc is used, stress will be diagonal to the PCB, therefore A > D is invalid.



[Mounting Capacitors Near Screw Holes]

When a capacitor is mounted near a screw hole, it may be affected by the board deflection that occurs during the tightening of the screw.
Mount the capacitor in a position as far away from the screw holes as possible.

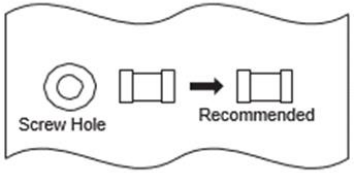

2. Information before Mounting

1. Do not re-use capacitors that were removed from the equipment.
2. Confirm capacitance characteristics under actual applied voltage.
3. Confirm the mechanical stress under actual process and equipment use.
4. Confirm the rated capacitance, rated voltage and other electrical characteristics before assembly.
5. Prior to use, confirm the solderability of capacitors that were in long-term storage.
6. Prior to measuring capacitance, carry out a heat treatment for capacitors that were in long-term storage.
7. The use of Sn-Zn based solder will deteriorate the reliability of the MLCC. Please contact our sales representative or product engineers on the use of Sn-Zn based solder in advance.

Downloaded from Arrow.com.


3. Maintenance of the Mounting (pick and place) Machine

1. Make sure that the following excessive forces are not applied to the capacitors. Check the mounting in the actual device under actual use conditions ahead of time.


1-1. In mounting the capacitors on the printed circuit board, any bending force against them shall be kept to a minimum to prevent them from any damage or cracking. Please take into account the following precautions and recommendations for use in your process.

(1) Adjust the lowest position of the pickup nozzle so as not to bend the printed circuit board.

[Incorrect]

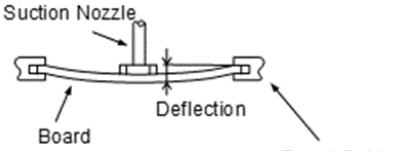

[Correct]

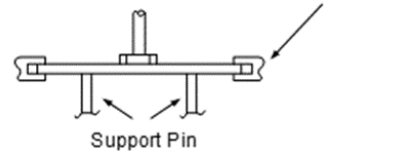

2. Dirt particles and dust accumulated in the suction nozzle and suction mechanism prevent the nozzle from moving smoothly. This creates excessive force on the capacitor during mounting, causing cracked chips. Also, the locating claw, when worn out, imposes uneven forces on the chip when positioning, causing cracked chips. The suction nozzle and the locating claw must be maintained, checked and replaced periodically.

Downloaded from Arrow.com.

4-1. Reflow Soldering

1. When sudden heat is applied to the components, the mechanical strength of the components will decrease because a sudden temperature change causes deformation inside the components.
In order to prevent mechanical damage to the components, preheating is required for both the components and the PCB.
Preheating conditions are shown in table 1.
It is required to keep the temperature differential between the solder and the components surface (ΔT) as small as possible.

2. When components are immersed in solvent after mounting, be sure to maintain the temperature difference (ΔT) between the component and the solvent within the range shown in the table 1.

Table 1


Series	Chip Dimension(L/W) Code	Temperature Different
GA□	42/43/52/55	ΔT≦130℃

Recommended Conditions


Item	Lead Free Solder
Peak Temperature	240 to 260℃
Atmosphere	Air or N_2

Lead Free Solder：Sn-3.0Ag-0.5Cu

[Standard Conditions for Reflow Soldering]

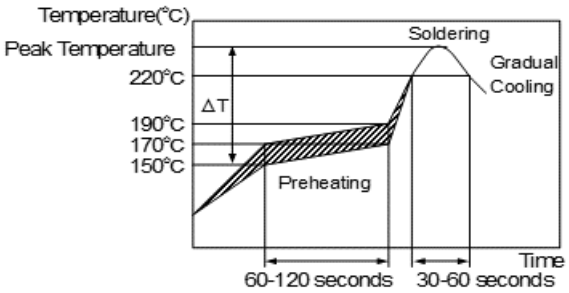

[Allowable Reflow Soldering Temperature and Time]

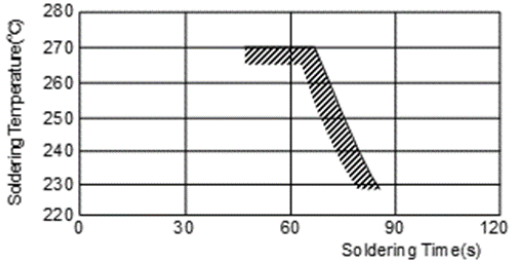

In the case of repeated soldering, the accumulated soldering time must be within the range shown above.

3. When a capacitor is mounted at a temperature lower than the peak reflow temperature recommended by the solder manufacturer, the following quality problems can occur.
Consider factors such as the placement of peripheral components and the reflow temperature setting to prevent the capacitor's reflow temperature from dropping below the peak temperature specified.
Be sure to evaluate the mounting situation beforehand and verify that none of the following problems occur.
- Drop in solder wettability
- Solder voids
- Possible occurrence of whiskering
- Drop in bonding strength
- Drop in self-alignment properties
- Possible occurrence of tombstones and/or shifting on the land patterns of the circuit board

4. Optimum Solder Amount for Reflow Soldering

4-1. Overly thick application of solder paste results in a excessive solder fillet height. This makes the chip more susceptible to mechanical and thermal stress on the board and may cause the chips to crack.
4-2. Too little solder paste results in a lack of adhesive strength on the termination, which may result in chips breaking loose from the PCB.
4-3. Please confirm that solder has been applied smoothly to the termination.

Inverting the PCB

Make sure not to impose any abnormal mechanical shocks to the PCB.

Downloaded from Arrow.com.

4-2. Flow Soldering

1. This product is not apply flow soldering.

4-3. Correction of Soldered Portion

When sudden heat is applied to the capacitor, distortion caused by the large temperature difference occurs internally, and can be the cause of cracks.
Capacitors also tend to be affected by mechanical and thermal stress depending on the board preheating temperature or the soldering fillet shape, and can be the cause of cracks.
Please refer to "1. PCB Design" or "3. Optimum solder amount" for the solder amount and the fillet shapes.

1. Correction with a Soldering Iron

1-1. In order to reduce damage to the capacitor, be sure to preheat the capacitor and the mounting board. Preheat to the temperature range shown in Table 3. A hot plate, hot air type preheater, etc. can be used for preheating.

1-2. After soldering, do not allow the component/PCB to cool down rapidly.

1-3. Perform the corrections with a soldering iron as quickly as possible. If the soldering iron is applied too long, there is a possibility of causing solder leaching on the terminal electrodes, which will cause deterioration of the adhesive strength and other problems.

Table 3

Series	Chip Dimension (L/W) Code	Temperature of Soldering Iron Tip	Preheating Temperature	Temperature Differential(ΔT)	Atmosphere
GA□	42/43/52/55	280℃ max.	150℃ min.	ΔT≦130℃	Air

Lead Free Solder : Sn-3.0Ag-0.5Cu
*Please manage Δ T in the temperature of soldering iron and the preheating temperature.

2. Correction with Spot Heater
Compared to local heating with a soldering iron, hot air heating by a spot heater heats the overall component and board, therefore, it tends to lessen the thermal shock.
In the case of a high density mounted board, a spot heater can also prevent concerns of the soldering iron making direct contact with the component.


2-1. If the distance from the hot air outlet of the spot heater to the component is too close, cracks may occur due to thermal shock. To prevent this problem, follow the conditions shown in Table 4.

2-2. In order to create an appropriate solder fillet shape, it is recommended that hot air be applied at the angle shown in Figure 1.

Table 4

Distance	5mm or more
Hot Air Application angle	45° *Figure 1
Hot Air Temperature Nozzle Outlet	400°C max.
Application Time	Less than 30s


[Figure 1]

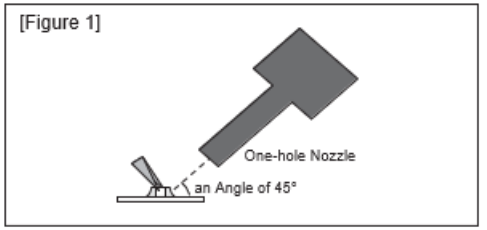

3. Optimum solder amount when re-working with a soldering iron

3-1. If the solder amount is excessive, the risk of cracking is higher during board bending or any other stressful condition.
Too little solder amount results in a lack of adhesive strength on the termination, which may result in chips breaking loose from the PCB.
Please confirm that solder has been applied smoothly is and rising to the end surface of the chip.

3-2. A soldering iron with a tip of ø3mm or smaller should be used.
It is also necessary to keep the soldering iron from touching the components during the re-work.



in section

Downloaded from Arrow.com.

5. Washing

Excessive ultrasonic oscillation during cleaning can cause the PCBs to resonate, resulting in cracked chips or broken solder joints.
Before starting your production process, test your cleaning equipment / process to insure it does not degrade the capacitors.


6. Electrical Test on Printed Circuit Board

1. Confirm position of the support pin or specific jig, when inspecting the electrical performance of a capacitor after mounting on the printed circuit board.


1-1. Avoid bending the printed circuit board by the pressure of a test-probe, etc. The thrusting force of the test probe can flex the PCB, resulting in cracked chips or open solder joints.
Provide support pins on the back side of the PCB to prevent warping or flexing. Install support pins as close to the test-probe as possible.

1-2. Avoid vibration of the board by shock when a test -probe contacts a printed circuit board.

[Not Recommended]

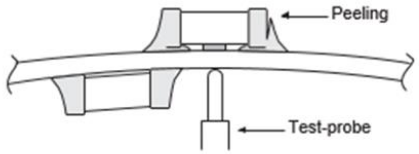

[Recommended]

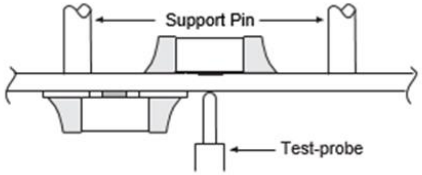


Downloaded from Arrow.com.

7. Printed Circuit Board Cropping

1. After mounting a capacitor on a printed circuit board, do not apply any stress to the capacitor that caused bending or twisting the board.

1-1. In cropping the board, the stress as shown may cause the capacitor to crack. Cracked capacitors may cause deterioration of the insulation resistance, and result in a short.
Avoid this type of stress to a capacitor.

[Bending]



[Twisting]



2. Check the cropping method for the printed circuit board in advance.

2-1. Printed circuit board cropping shall be carried out by using a jig or an apparatus (Disc separator, router type separator, etc.) to prevent the mechanical stress that can occur to the board.


Board Separation Method	Hand Separation Nipper Separation	(1) Board Separation Jig	Board Separation Apparatus	
			(2) Disc Separator	(3) Router Type Separator
Level of stress on board	High	Medium	Medium	Low
Recommended	×	△*	△*	○
Notes	Hand and nipper separation apply a high level of stress. Use another method.	· Board handling · Board bending direction · Layout of capacitors	· Board handling · Layout of slits · Design of V groove · Arrangement of blades · Controlling blade life	Board handling

* When a board separation jig or disc separator is used, if the following precautions are not observed, a large board deflection stress will occur and the capacitors may crack.
Use router type separator if at all possible.



(1) Example of a suitable jig

[In the case of Single-side Mounting]
An outline of the board separation jig is shown as follows.
Recommended example: Stress on the component mounting position can be minimized by holding the portion close to the jig, and bend in the direction towards the side where the capacitors are mounted.
Not recommended example: The risk of cracks occurring in the capacitors increases due to large stress being applied to the component mounting position, if the portion away from the jig is held and bent in the direction opposite the side where the capacitors are mounted.

[Outline of jig]

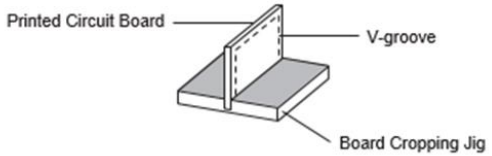

[Hand Separation]

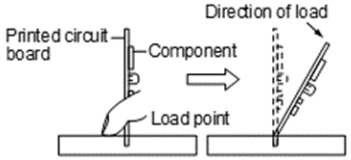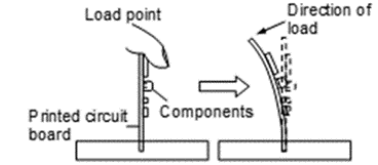Recommended	Not recommended
	


[In the case of Double-sided Mounting]
Since components are mounted on both sides of the board, the risk of cracks occurring can not be avoided with the above method. Therefore, implement the following measures to prevent stress from being applied to the components.
(Measures)
(1) Consider introducing a router type separator. If it is difficult to introduce a router type separator, implement the following measures. (Refer to item 1. Mounting Position)
(2) Mount the components parallel to the board separation surface.
(3) When mounting components near the board separation point, add slits in the separation position near the component.
(4) Keep the mounting position of the components away from the board separation point.

Downloaded from Arrow.com.


(2) Example of a Disc Separator

An outline of a disc separator is shown as follows. As shown in the Principle of Operation, the top blade and bottom blade are aligned with the V-grooves on the printed circuit board to separate the board.
In the following case, board deflection stress will be applied and cause cracks in the capacitors.
(1) When the adjustment of the top and bottom blades are misaligned, such as deviating in the top-bottom, left-right or front-rear directions
(2) The angle of the V groove is too low, depth of the V groove is too shallow, or the V groove is misaligned top-bottom
If V groove is too deep, it is possible to brake when you handle and carry it. Carefully design depth of the V groove with consideration about strength of material of the printed circuit board.


[Outline of Machine]

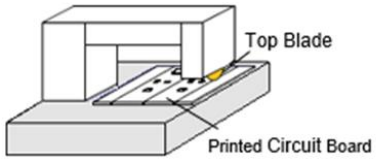



[Principle of Operation]

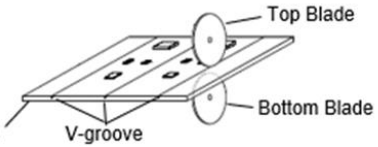



[Cross-section Diagram]



[Disc Separator]

Recommended	Not recommended		
	Top-bottom Misalignment	Left-right Misalignment	Front-rear Misalignment
Top Blade  Bottom Blade	Top Blade  Bottom Blade	Top Blade  Bottom Blade	Top Blade  Bottom Blade


[V-groove Design]

Example of Recommended V-groove Design	Not Recommended			
	Left-right Misalignment	Low-Angle	Depth too Shallow	Depth too Deep
				

(3) Example of Router Type Separator

The router type separator performs cutting by a router rotating at a high speed. Since the board does not bend in the cutting process, stress on the board can be suppressed during board separation.
When attaching or removing boards to/from the router type separator, carefully handle the boards to prevent bending.

[Outline Drawing]



Downloaded from Arrow.com.

8. Assembly


1. Handling

If a board mounted with capacitors is held with one hand, the board may bend. Firmly hold the edges of the board with both hands when handling.
If a board mounted with capacitors is dropped, cracks may occur in the capacitors. Do not use dropped boards, as there is a possibility that the quality of the capacitors may be impaired.

2. Attachment of Other Components


2-1. Mounting of Other Components

Pay attention to the following items, when mounting other components on the back side of the board after capacitors have been mounted on the opposite side.
When the bottom dead point of the suction nozzle is set too low, board deflection stress may be applied to the capacitors on the back side (bottom side), and cracks may occur in the capacitors.
・After the board is straightened, set the bottom dead point of the nozzle on the upper surface of the board.
・Periodically check and adjust the bottom dead point.




2-2. Inserting Components with Leads into Boards

When inserting components (transformers, IC, etc.) into boards, bending the board may cause cracks in the capacitors or cracks in the solder. Pay attention to the following.
・Increase the size of the holes to insert the leads, to reduce the stress on the board during insertion.
・Fix the board with support pins or a dedicated jig before insertion.
・Support below the board so that the board does not bend. When using support pins on the board, periodically confirm that there is no difference in the height of each support pin.




2-3. Attaching/Removing Sockets and/or Connectors

Insertion and removal of sockets and connectors, etc., might cause the board to bend.
Please insure that the board does not warp during insertion and removal of sockets and connectors, etc., or the bending may damage mounted components on the board.



2-4. Tightening Screws

The board may be bent, when tightening screws, etc. during the attachment of the board to a shield or chassis. Pay attention to the following items before performing the work.
・Plan the work to prevent the board from bending.
・Use a torque screwdriver, to prevent over-tightening of the screws.
・The board may bend after mounting by reflow soldering, etc. Please note, as stress may be applied to the chips by forcibly flattening the board when tightening the screws.



Downloaded from Arrow.com.

■ Others

1. Under Operation of Equipment

1-1. Do not touch a capacitor directly with bare hands during operation in order to avoid the danger of an electric shock.

1-2. Do not allow the terminals of a capacitor to come in contact with any conductive objects (short-circuit).
Do not expose a capacitor to a conductive liquid, inducing any acid or alkali solutions.

1-3. Confirm the environment in which the equipment will operate is under the specified conditions.
Do not use the equipment under the following environments.
(1) Being spattered with water or oil.
(2) Being exposed to direct sunlight.
(3) Being exposed to ozone, ultraviolet rays, or radiation.
(4) Being exposed to toxic gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)
(5) Any vibrations or mechanical shocks exceeding the specified limits.
(6) Moisture condensing environments.

1-4. Use damp proof countermeasures if using under any conditions that can cause condensation.


2. Others

2-1. In an Emergency
(1) If the equipment should generate smoke, fire, or smell, immediately turn off or unplug the equipment. If the equipment is not turned off or unplugged, the hazards may be worsened by supplying continuous power.
(2) In this type of situation, do not allow face and hands to come in contact with the capacitor or burns may be caused by the capacitor's high temperature.

2-2. Disposal of waste
When capacitors are disposed of, they must be burned or buried by an industrial waste vendor with the appropriate licenses.

2-3. Circuit Design
(1) Addition of Fail Safe Function
Capacitors that are cracked by dropping or bending of the board may cause deterioration of the insulation resistance, and result in a short.
If the circuit being used may cause an electrical shock, smoke or fire when a capacitor is shorted, be sure to install fail-safe functions, such as a fuse, to prevent secondary accidents.
(2) Capacitors used to prevent electromagnetic interference in the primary AC side circuit, or as a connection/insulation, must be a safety standard certified product, or satisfy the contents stipulated in the Electrical Appliance and Material Safety Law. Install a fuse for each line in case of a short.

2-4. Test Condition for AC Withstanding Voltage
(1) Test Equipment
Test for AC withstanding voltage should be made with equipment capable of creating a wave similar to a 50/60 Hz sine wave.
(2) Voltage Applied Method
The capacitor's leads or terminals should be firmly connected to the output of the withstanding voltage test equipment , and then the voltage should be raised from near zero to the test voltage.
If the test voltage is applied directly to the capacitor without raising it from near zero, it should be applied with the zero cross. *At the end of the test time, the test voltage should be reduced to near zero, and then the capacitor's leads or terminals should be taken off the output of the withstanding voltage test equipment.
If the test voltage is applied directly to the capacitor without raising it from near zero, surge voltage may occur and cause a defect.
*ZERO CROSS is the point where voltage sine wave passes 0V. - See the figure at right -



2-5. Remarks
Failure to follow the cautions may result, worst case, in a short circuit and smoking when the product is used.
The above notices are for standard applications and conditions. Contact us when the products are used in special mounting conditions.
Select optimum conditions for operation as they determine the reliability of the product after assembly. The data herein are given in typical values, not guaranteed ratings.

Downloaded from Arrow.com.

Notice

■Rating

1. Operating Temperature

1. The operating temperature limit depends on the capacitor.

1-1. Do not apply temperatures exceeding the maximum operating temperature.
It is necessary to select a capacitor with a suitable rated temperature that will cover the operating temperature range.
It is also necessary to consider the temperature distribution in equipment and the seasonal temperature variable factor.

1-2. Consider the self-heating factor of the capacitor
The surface temperature of the capacitor shall not exceed the maximum operating temperature including self-heating.

2. Atmosphere Surroundings (gaseous and liquid)

1. Restriction on the operating environment of capacitors.

1-1. The capacitor will short-circuit by water or brine. It may shorten the lifetime and may have the failure by the corrosion of terminals and the permeation of moisture into capacitor.

1-2. The same phenomenon as the above may occur when the electrodes or terminals of the capacitor are subject to moisture condensation.

1-3. The deterioration of characteristics and insulation resistance due to the oxidization or corrosion of terminal electrodes may result in breakdown when the capacitor is exposed to corrosive or volatile gases or solvents for long periods of time.

3. Piezo-electric Phenomenon

1. When using high dielectric constant type capacitors in AC or pulse circuits, the capacitor itself vibrates at specific frequencies and noise may be generated.
Moreover, when the mechanical vibration or shock is added to capacitor, noise may occur.

Downloaded from Arrow.com.

■ Soldering and Mounting

1. PCB Design









1. Notice for Pattern Forms

1-1. Unlike leaded components, chip components are susceptible to flexing stresses since they are mounted directly on the substrate.
They are also more sensitive to mechanical and thermal stresses than leaded components.
Excess solder fillet height can multiply these stresses and cause chip cracking. When designing substrates, take land patterns and dimensions into consideration to eliminate the possibility of excess solder fillet height.

1-2. There is a possibility of chip cracking caused by PCB expansion/contraction with heat, because stress on a chip is different depending on PCB material and structure.
When the thermal expansion coefficient greatly differs between the board used for mounting and the chip, it will cause cracking of the chip due to the thermal expansion and contraction.
When capacitors are mounted on a fluorine resin printed circuit board or on a single-layered glass epoxy board, it may also cause cracking of the chip for the same reason.

1-3. If you are replacing by smaller capacitors, you should not only consider the Land size change but also consider changing the Wiring Width, Wiring direction,
and copper foil thickness because the risk of chip cracking is increased with just a Land size change.

Pattern Forms

Item	Prohibited	Correct
Placing Close to Chassis	 in section	 in section
Placing of Chip Components and Leaded Components	 in section	 in section
Placing of Leaded Components after Chip Component	 in section	 in section
Lateral Mounting		

Downloaded from Arrow.com.

2. Land Dimensions

Please confirm the suitable land dimension by evaluating of the actual SET / PCB.

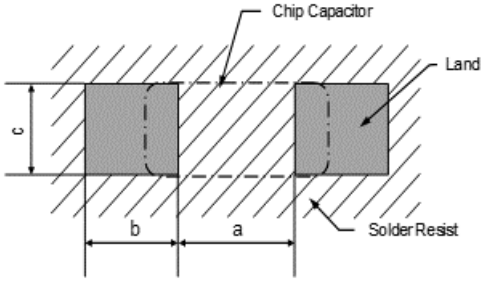



Table 1 Reflow Soldering Method

Series	Chip Dimension (L/W) Code	Chip(L×W)	a	b	c
GA☐	42	4.5×2.0	2.8 to 3.4	1.2 to 1.4	1.4 to 1.8
GA☐	43	4.5×3.2	3.0 to 3.5	1.2 to 1.4	2.3 to 3.0
GA☐	52	5.7×2.8	4.0 to 4.6	1.4 to 1.6	2.1 to 2.6
GA☐	55	5.7×5.0	4.0 to 4.6	1.4 to 1.6	3.5 to 4.8

(in mm)

2-2. Dimensions of Slit (Example)

Preparing the slit helps flux cleaning and resin coating on the back of the capacitor.
However, the length of the slit design should be as short as possible
to prevent mechanical damage in the capacitor.
A longer slit design might receive more severe mechanical stress from the PCB.
Recommended slit design is shown in the Table.

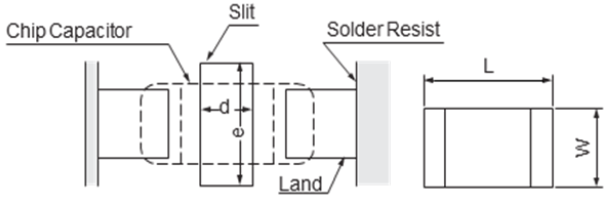

L×W	d	e
4.5×2.0	1.0 to 2.8	3.6 to 4.1
4.5×3.2	1.0 to 2.8	4.8 to 5.3
5.7×2.8	1.0 to 4.0	4.4 to 4.9
5.7×5.0	1.0 to 4.0	6.6 to 7.1


Downloaded from Arrow.com.

3. Board Design

When designing the board, keep in mind that the amount of strain which occurs will increase depending on the sizeand material of the board.

Relationship with amount of strain to the board thickness, length, width, etc.]

$$\varepsilon = \frac{3PL}{2Ewh^2}$$ Relationship between load and strain

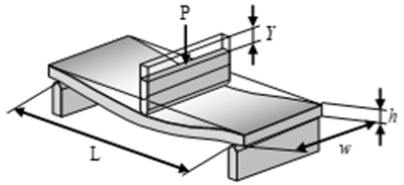

ε : Strain on center of board (μst)
L : Distance between supporting points (mm)
w : Board width (mm)
h : Board thickness (mm)
E : Elastic modulus of board (N/m^2=Pa)
Y : Deflection (mm)
P : Load (N)

When the load is constant, the following relationship can be established.
· As the distance between the supporting points (L) increases,the amount of strain also increases.
→Reduce the distance between the supporting points.
· As the elastic modulus (E) decreases, the amount of strain increases.
→Increase the elastic modulus.
· As the board width (w) decreases, the amount of strain increases.
→Increase the width of the board.
· As the board thickness (h) decreases, the amount of strain increases.
→Increase the thickness of the board.
Since the board thickness is squared, the effect on the amount of strain becomes even greater.

Downloaded from Arrow.com.

2. Reflow soldering

The flux in the solder paste contains halogen-based substances and organic acids as activators.
Strong acidic flux can corrode the capacitor and degrade its performance. Please check the quality of capacitor after mounting.

3. Washing

1. Please evaluate the capacitor using actual cleaning equipment and conditions to confirm the quality, and select the solvent for cleaning.

2. Unsuitable cleaning may leave residual flux or other foreign substances, causing deterioration of electrical characteristics and the reliability of the capacitors.

4. Coating

1. A crack may be caused in the capacitor due to the stress of the thermal contraction of the resin during curing process.
   The stress is affected by the amount of resin and curing contraction. Select a resin with low curing contraction.
   The difference in the thermal expansion coefficient between a coating resin or a molding resin and the capacitor may cause the destruction and deterioration of the capacitor such as a crack or peeling, and lead to the deterioration of insulation resistance or dielectric breakdown.
   Select a resin for which the thermal expansion coefficient is as close to that of the capacitor as possible. A silicone resin can be used as an under-coating to buffer against the stress.

2. Select a resin that is less hygroscopic.
   Using hygroscopic resins under high humidity conditions may cause the deterioration of the insulation resistance of a capacitor. An epoxy resin can be used as a less hygroscopic resin.

3. The halogen system substance and organic acid are included in coating material, and a chip corrodes by the kind of Coating material. Do not use strong acid type.

Downloaded from Arrow.com.

■ Others

1. Transportation

1. The performance of a capacitor may be affected by the conditions during transportation.

1-1. The capacitors shall be protected against excessive temperature, humidity and mechanical force during transportation.

・Mechanical condition
Transportation shall be done in such a way that the boxes are not deformed and forces are not directly passed on to the inner packaging.

1-2. Do not apply excessive vibration, shock, or pressure to the capacitor.
(1) When excessive mechanical shock or pressure is applied to a capacitor, chipping or cracking may occur in the ceramic body of the capacitor.
(2) When the sharp edge of an air driver, a soldering iron, tweezers, a chassis, etc. impacts strongly on the surface of the capacitor, the capacitor may crack and short-circuit.

1-3. Do not use a capacitor to which excessive shock was applied by dropping etc. A capacitor dropped accidentally during processing may be damaged.

2. Characteristics Evaluation in the Actual System

1. Evaluate the capacitor in the actual system, to confirm that there is no problem with the performance and specification values in a finished product before using.

2. Since a voltage dependency and temperature dependency exists in the capacitance of high dielectric type ceramic capacitors, the capacitance may change depending on the operating conditions in the actual system.
Therefore,be sure to evaluate the various characteristics, such as the leakage current and noise absorptivity, which will affect the capacitance value of the capacitor.

3. In addition,voltages exceeding the predetermined surge may be applied to the capacitor by the inductance in the actual system.
Evaluate the surge resistance in the actual system as required.

Downloaded from Arrow.com.

⚠ NOTE

1. Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.

2. Your are requested not to use our product deviating from this product specification.

3. We consider it not appropriate to include any terms and conditions with regard to the business transaction in the product specifications, drawings or other technical documents.
   Therefore, if your technical documents as above include such terms and conditions such as warranty clause, product liability clause, or intellectual property infringement liability clause, they will be deemed to be invalid.

Downloaded from Arrow.com.