General purpose transistors (dual transistors)


EMX26

●Features

1) Two 2SD2654 chips in a EMT package.
2) Mounting possible with EMT3 automatic mounting machines.
3) Transistor elements are independent, eliminating interference.
4) Mounting cost and area can be cut in half.

●External dimensions (Unit : mm)

EMX26



Each lead has same dimensions

ROHM : EMT6

Abbreviated symbol : X26


●Structure

Epitaxial planar type
NPN silicon transistor

The following characteristics apply to both Tr_1 and Tr_2.

●Equivalent circuit

EMX26



●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Collector-base voltage	V_{CBO}	60	V
Collector-emitter voltage	V_{CEO}	50	V
Emitter-base voltage	V_{EBO}	12	V
Collector current	I_C	0.15	A (DC)
		0.2	A (Pulse) ∗1
Power dissipation	Pd	150 (TOTAL)	mW ∗2
Junction temperature	Tj	150	°C
Storage temperature	Tstg	−55 to +150	°C

∗1 Single pulse Pw=100ms.
∗2 120mW per element must not be exceeded.

Downloaded from Arrow.com.

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	
Collector-base breakdown voltage	BV_{CBO}	60	–	–	V	I_C=10μA	
Collector-emitter breakdown voltage	BV_{CEO}	50	–	–	V	I_C=1mA	
Emitter-base breakdown voltage	BV_{EBO}	12	–	–	V	I_E=10μA	
Collector cutoff current	I_{CBO}	–	–	0.3	μA	V_{CB}=50V	
Emitter cutoff current	I_{EBO}	–	–	0.3	μA	V_{EB}=12V	
Collector-emitter saturation voltage	$V_{CE(sat)}$	–	–	0.3	V	I_C/I_B=50mA/5mA	*
DC current transfer ratio	h_{FE}	820	–	2700	–	V_{CE}/I_C=5V/1mA	*
Transition frequency	f_T	–	250	–	MHz	V_{CE}=5V, I_E=–10mA, f=100MHz	*
Output capacitance	Cob	–	3.5	*	pF	V_{CB}=5V, I_E=0A, f=1MHz	

* Measured using pulse current.

●Packaging specifications

Type	Package	Taping
	Code	T2R
	Basic ordering unit (pieces)	8000
EMX26		○

●Electrical characteristic curves

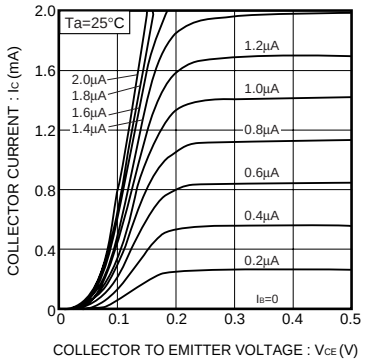


Fig.1 Grounded emitter output characteristics (I)

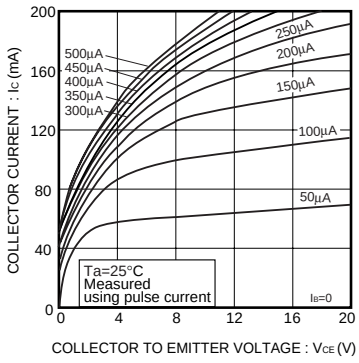


Fig.2 Grounded emitter output characteristics (II)

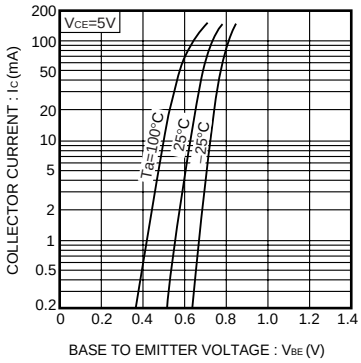


Fig.3 Grounded emitter propagation characteristics

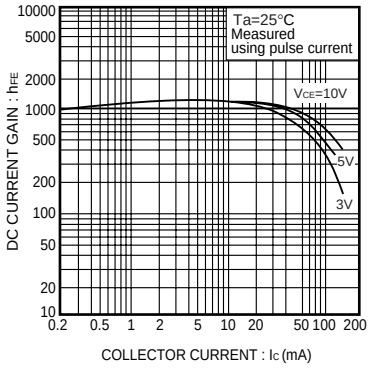


Fig.4 DC current gain vs. collector current (I)

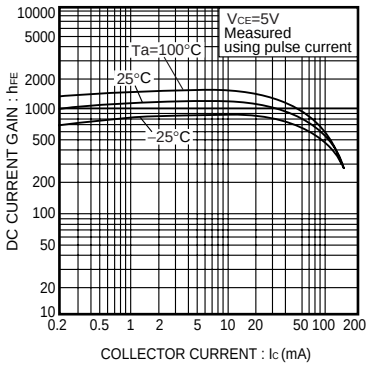


Fig.5 DC current gain vs. collector current (II)

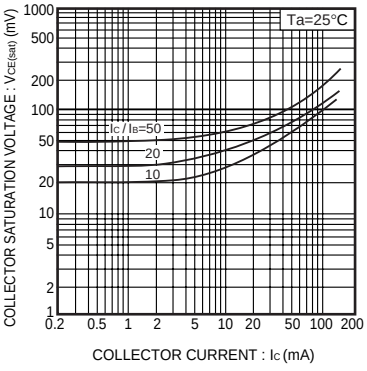


Fig.6 Collector-emitter saturation voltage vs. collector current (I)

Downloaded from Arrow.com.

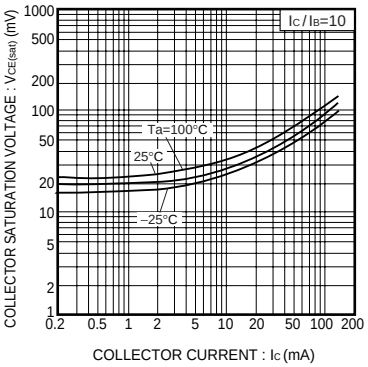


Fig.7 Collector-emitter saturation voltage vs. collector current (II)

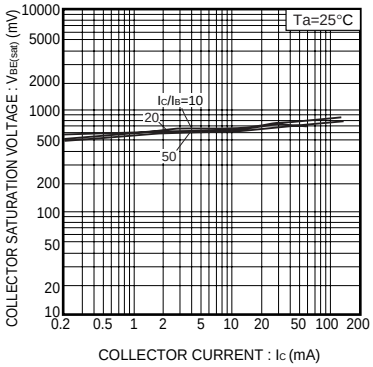


Fig.8 Base-emitter saturation voltage vs. collector current (I)

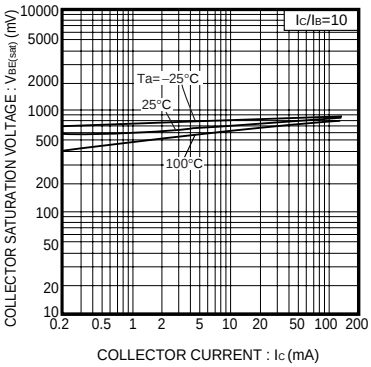


Fig.9 Base-emitter saturation voltage vs. collector current (II)

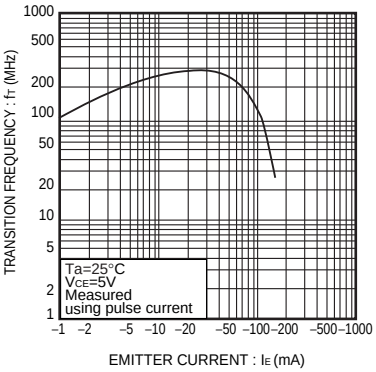


Fig.10 Gain bandwidth product vs. emitter current

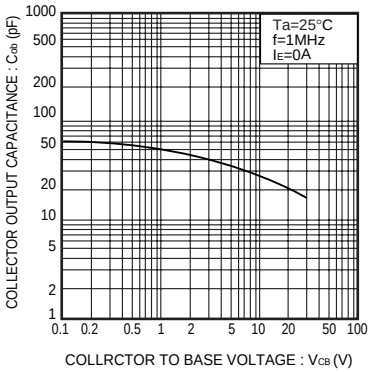


Fig.11 Collector output capacitance vs. collector-base voltage

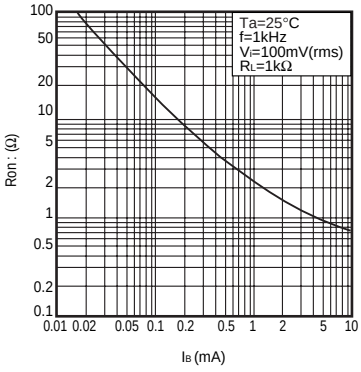


Fig.12 Output on resistance vs. base current

Downloaded from Arrow.com.

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).
Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.
In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

Downloaded from Arrow.com.

emx26 - Web Page

Buy

Distribution Inventory

Part Number	emx26
Package	EMT6
Unit Quantity	8000
Minimum Package Quantity	8000
Packing Type	Taping
Constitution Materials List	inquiry
RoHS	Yes

Downloaded from Arrow.com.