Photomicrosensor (Transmissive)

EE-SX1088-W11

Slot/Pre-wired Type


- Removable dedicated connector for easier maintenance
- Mounted with M3 screws
- Wire length 610 mm min. (AWG28)
- Solder-less lead wire installation for improved reliability



⚠ **Be sure to read *Safety Precautions* on Page 3.**

Ordering Information

Photomicrosensor

Appearance	Sensing method	Connecting method	Sensing distance	Aperture size (H × W) (mm)	Output type	Model	Minimum packing unit (Unit: pcs)
	Transmissive (slot type)	Pre-wired type	3.4 mm (Slot width)	Both emitting side and detecting side 1.9 × 0.5	Phototransistor	**EE-SX1088-W11**	1

Note: Order in multiples of minimum packing unit.

Ratings, Characteristics and Exterior Specifications

Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	Rated value	Unit
Emitter				
	Forward current	I_F	50*1	mA
	Pulse forward current	I_{FP}	1*2	A
	Reverse voltage	V_R	4	V
Detector				
	Collector-Emitter voltage	V_{CEO}	30	V
	Emitter-Collector voltage	V_{ECO}	—	V
	Collector current	I_C	20	mA
	Collector dissipation	P_C	100*1	mW
Operating temperature		T_{opr}	-25 to 80	°C
Storage temperature		T_{stg}	-25 to 85	°C

*1. Refer to the temperature rating chart if the ambient temperature exceeds 25°C.
*2. Pulse width ≤ 10 μs, Repeated 100 Hz
Note: 1. When screw mounting, use an M3 screw, spring washer, and plain washer and tighten with a torque of 0.5 N·m.
2. Do not use the lead wire with stress applied.

Exterior Specifications

Connecting method	Weight (g)	Material	
		Case	Wire insulator
Pre-wired type	4.71	Polycarbonate	Non-lead PVC

Electrical and Optical Characteristics (Ta = 25°C)

Item		Symbol	Value			Unit	Condition
			MIN.	TYP.	MAX.		
Emitter							
	Forward voltage	V_F	—	1.2	1.5	V	I_F = 30 mA
	Reverse current	I_R	—	0.01	10	μA	V_R = 4 V
	Peak emission wavelength	λ_P	—	940	—	nm	I_F = 20 mA
Detector							
	Light current	I_L	0.5	—	14	mA	I_F = 20 mA, V_{CE} = 10 V
	Dark current	I_D	—	2	200	nA	V_{CE} = 10 V, 0 lx
	Leakage current	I_{LEAK}	—	—	—	μA	—
	Collector-Emitter saturated voltage	V_{CE} (sat)	—	0.15	0.4	V	I_F = 20 mA, I_L = 0.1 mA
	Peak spectral sensitivity wavelength	λ_P	—	850	—	nm	V_{CE} = 10 V
Rising time		tr	—	4	—	μs	V_{CC} = 5 V, R_L = 100 Ω I_L = 5 mA
Falling time		tf	—	4	—	μs	V_{CC} = 5 V, R_L = 100 Ω I_L = 5 mA

Downloaded from Arrow.com.

Engineering Data (Reference Value)

Fig 1. Forward Current vs. Collector Dissipation Temperature Rating

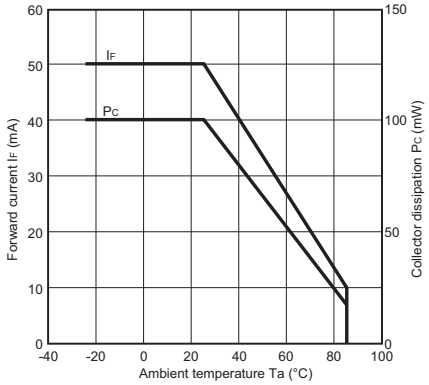


Fig 2. Forward Current vs. Forward Voltage Characteristics (Typical)

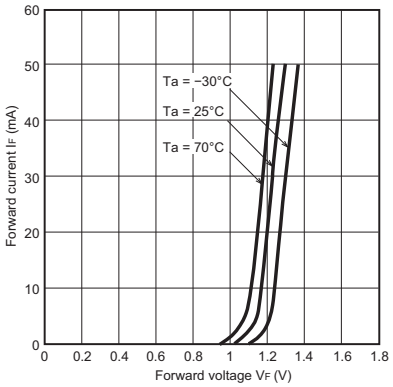


Fig 3. Light Current vs. Forward Current Characteristics (Typical)

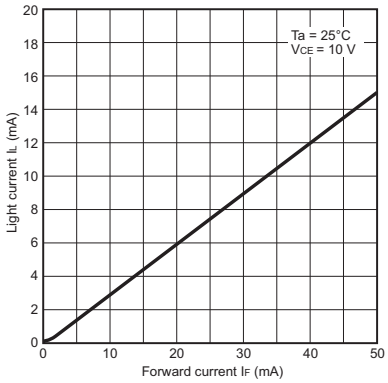


Fig 4. Light Current vs. Collector-Emitter Voltage Characteristics (Typical)

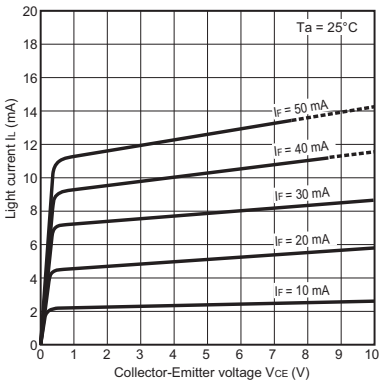


Fig 5. Relative Light Current vs. Ambient Temperature Characteristics (Typical)

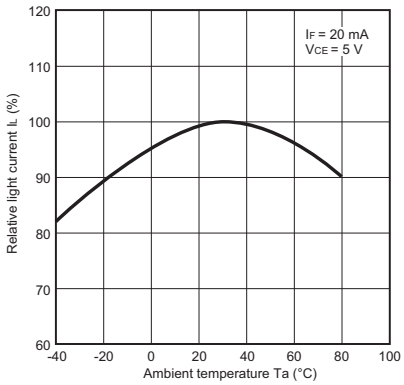


Fig 6. Dark Current vs. Ambient Temperature Characteristics (Typical)

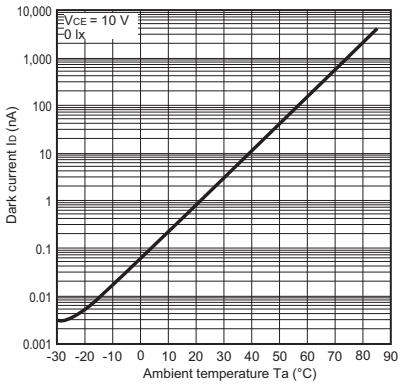


Fig 7. Response Time vs. Load Resistance Characteristics (Typical)

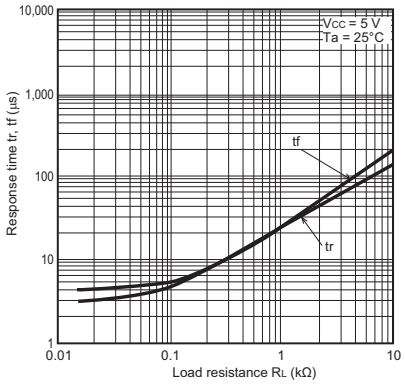


Fig 8. Sensing Position Characteristics (Typical)

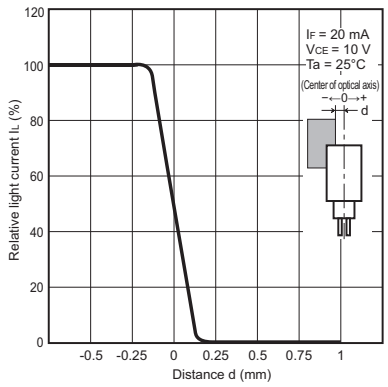


Fig 9. Sensing Position Characteristics (Typical)


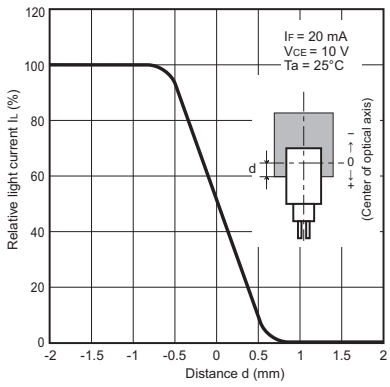


Fig 10. Response Time Measurement Circuit



Downloaded from Arrow.com.

Safety Precautions

To ensure safe operation, be sure to read and follow the Instruction Manual provided with the Sensor.

⚠ CAUTION

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



Precautions for Safe Use

Do not use the product with a voltage or current that exceeds the rated range.

Applying a voltage or current that is higher than the rated range may result in explosion or fire.

Do not miswire such as the polarity of the power supply voltage.

Otherwise the product may be damaged or it may burn.

This product does not resist water. Do not use the product in places where water or oil may be sprayed onto the product.

Precautions for Correct Use

- Do not use the product in atmospheres or environments that exceed product ratings.
- When using the sensor on moving parts, secure the pull out portion of the cord so that it is not subjected to direct stress.
- Do not perform cord wiring when power supply voltage is applied. Doing so may result in breakage.
- Dispose of this product as industrial waste.

Dimensions and Internal Circuit

(Unit: mm)


Photomicrosensor


EE-SX1088-W11




Aperture size (H × W)

Emitter	Detector
1.9 × 0.5	1.9 × 0.5

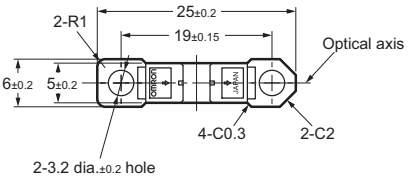

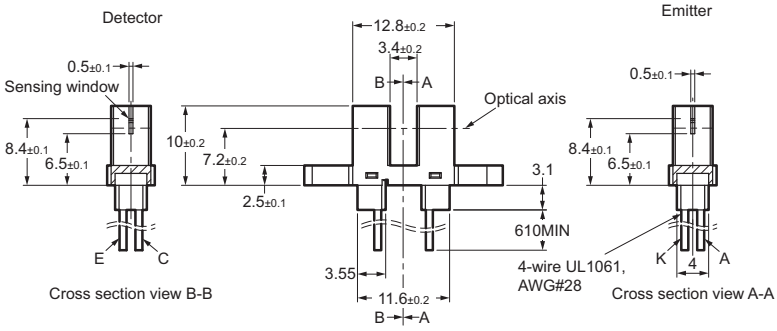

Internal circuit



Terminal No.	Color	Name
A	Red	Anode
K	Black	Cathode
C	White	Collector
E	Green	Emitter

Unless otherwise specified, the tolerances are as shown below.

Dimensions	Tolerance
3 mm max.	±0.3
3 < mm ≤ 6	±0.375
6 < mm ≤ 10	±0.45
10 < mm ≤ 18	±0.55
18 < mm ≤ 30	±0.65

Downloaded from Arrow.com.

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Device & Module Solutions Company

Regional Contact

Americas
https://components.omron.com/us

Europe
https://components.omron.com/eu

Asia-Pacific
https://components.omron.com/ap

China
https://components.omron.com.cn

Korea
https://components.omron.com/kr

Japan
https://components.omron.com/jp

© OMRON Corporation 2018-2022 All Rights Reserved.
In the interest of product improvement, specifications are subject to change without notice.

Cat. No. E523-E1-03
1122 (0318)

Downloaded from Arrow.com.