
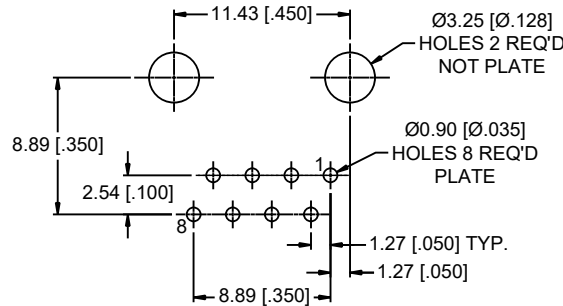
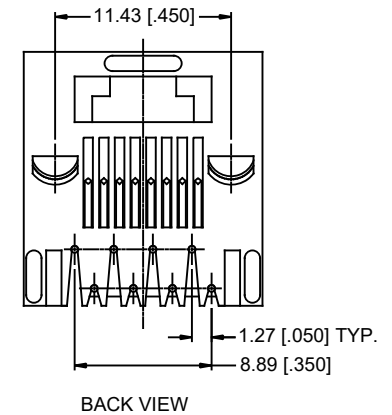
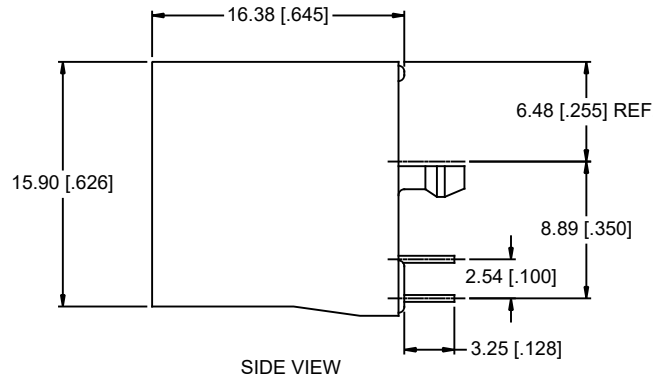



REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	NEW PROPOSAL	JUL19/22	KELVIN

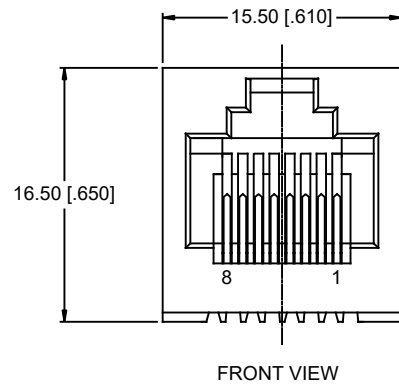

#### NOTES:

- MATERIALS:**  
CONTACTS: PHOSPHOR BRONZE, 0.46MM DIAMETER,  
PLATING: GOLD FLASH PLATING,  
50 $\mu$  "[1.27 MICRONS] MIN. NICKEL OVERALL.  
HOUSING: ENGINEERING THERMOPLASTIC, FLAMMABILITY RATING UL 94V-0  
COLOR - BLACK.
- MECHANICAL:**  
MATING FORCE: 5.0 LBS MAXIMUM
- ELECTRICAL:**  
CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM  
INSULATION RESISTANCE: 500 MEGOHMS MINIMUM  
CURRENT RATING: 1.5 AMPS  
VOLTAGE RATING: 125 VOLTS AC
- ENVIRONMENTAL:**  
STORAGE TEMPERATURE: -40°C TO +85°C
- RECOMMENDED SOLDERING TEMPERATURE:**  
WAVE SOLDERING PEAKED AT 260°C FOR 5 TO 8 SECONDS.

AMPHENOL PART NUMBER: RJE08-188-001F

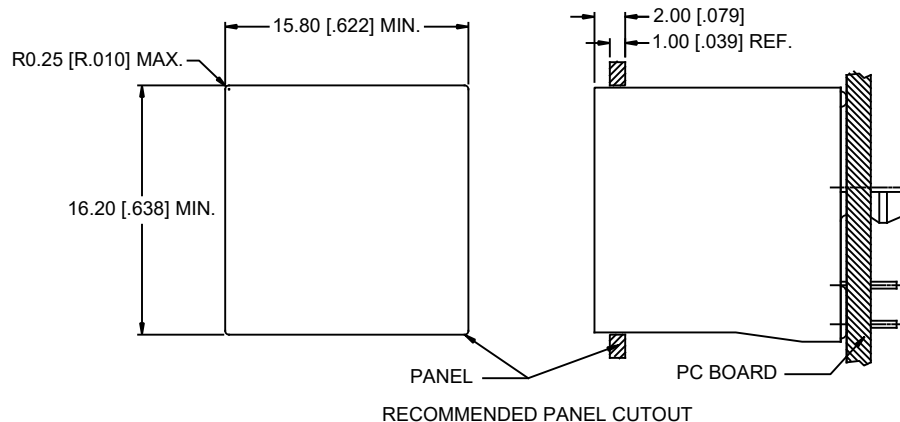

UNLESS SPECIFIED OTHERWISE			DRAWN RONNIE.C		JUL19/22	Amphenol Canada Corp. Commercial Products	
PRIMARY UNITS MILLIMETERS			CHECKED KELVIN.T		JUL19/22		
SECONDARY INCHES			M.E. APP'D			SINGLE PORT, VERTICAL MODULAR JACK, 8 POSITION, 8 CONTACTS, UNSHIELD -RoHS COMPLIANT	
REFERENCE IN PARENTHESES			Q.A. APP'D				
GENERAL TOLERANCES			DWG APP'D			DWG NO. P-RJE08-188-001F	
1 DECIMAL PLACE $\pm 0.35$			ENG. REL. NO.				
2 DECIMAL PLACES $\pm 0.25$			REF.			REV A	
3 DECIMAL PLACES $\pm 0.15$			THIRD ANGLE PROJECTION				
ANGULAR DEGREES $\pm 2.0^\circ$			DO NOT SCALE DRAWING			CODE ID NO. 03554 DWG SIZE X SCALE N/A SHEET 1 OF 1	