GENERAL DESCRIPTION

The SPX3940 is a 1A, accurate voltage regulator with a low drop out voltage of 280mV (typical) at 1A.

These regulators are specifically designed for low voltage applications that require a low dropout voltage and a fast transient response. They are fully fault protected against over-current, reverse battery, and positive and negative voltage transients.

The SPX3940 is offered in 3-pin SOT223 and TO-263 packages. For a 3A version, refer to the SPX29300 data sheet.

APPLICATIONS

- **Power Supplies**
- **LCD Monitors**
- **Portable Instrumentation**
- **Medical and Industrial Equipments**

FEATURES

- **Guaranteed 1.5A Peak Current**
- **1% Output Accuracy SPX3940A**
- **Low Quiescent Current**
- **Low Dropout Voltage of 280mV at 1A**
- **Extremely Tight Load and Line Regulation**
- **Extremely Fast Transient Response**
- **Reverse-battery Protection**
- **Internal Thermal Protection**
- **Internal Short Circuit Current Limit**
- **Replacement for LM3940**
- **Standard SOT223 & TO-263 packages**

TYPICAL APPLICATION DIAGRAM

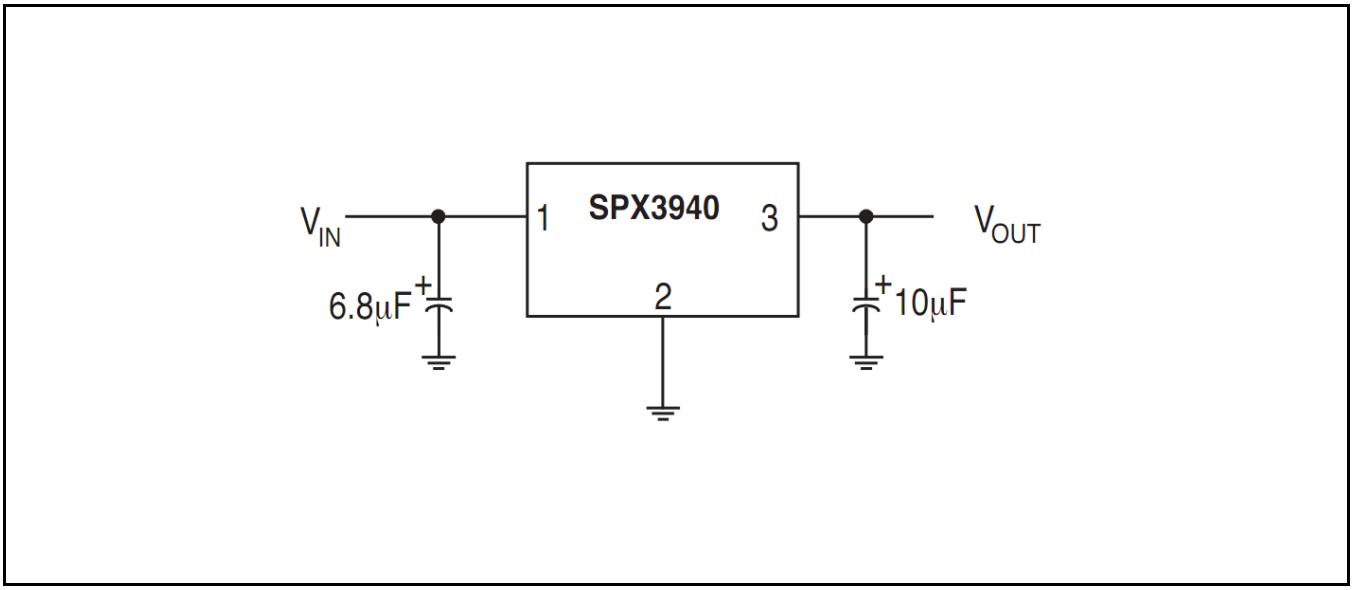

Fig. 1: SPX3940 Application Diagram – Fixed Output Linear Regulator

Downloaded from Arrow.com.

ABSOLUTE MAXIMUM RATINGS

These are stress ratings only and functional operation of the device at these ratings or any other above those indicated in the operation sections of the specifications below is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

Input Voltage V_{IN} ..... 20V[1]
Storage Temperature ..... -65°C to 150°C
Lead Temperature (Soldering, 5 sec) ..... 260°C

OPERATING RATINGS

Input Voltage V_{IN} 16V
Junction Temperature Range ..... -40°C to 125°C
Packages Thermal Resistance
SOT-223 Junction to Case (at T_A) ..... 15°C/W
SOT-223 Junction to Ambient ..... 62.3°C/W
TO-263 Junction to Case (at T_A) ..... 3°C/W
TO-263 Junction to Ambient ..... 31.4°C/W

Note 1: Maximum positive supply voltage of 20V must be of limited duration (<100ms) and duty cycle (<1%). The maximum continuous supply voltage is 16V.

ELECTRICAL SPECIFICATIONS

Specifications with standard type are for an Operating Ambient Temperature of T_A = 25°C only; limits applying over the full Operating Junction Temperature range are denoted by a "•". Minimum and Maximum limits are guaranteed through test, design, or statistical correlation. Typical values represent the most likely parametric norm at T_A = 25°C, and are provided for reference purposes only. Unless otherwise indicated, V_{IN} = V_{IN} +1V, I_{OUT} = 10mA, C_{IN} = 6.8µF, C_{OUT} = 10µF, T_A = 25°C.

Parameter	Min.	Typ.	Max.	Units		Conditions
1.8V version						
Output Voltage - SPX3940A (1%)	1.782	1.8	1.818	V		I_{OUT}=10mA 10mA≤I_{OUT}≤1A, 6V≤V_{IN}≤16V
	1.755	1.8	1.845		•	
Output Voltage - SPX3940 (2%)	1.764	1.8	1.836	V		
	1.737	1.8	1.863		•	
2.5V version						
Output Voltage - SPX3940A (1%)	2.475	2.5	2.525	V		I_{OUT}=10mA 10mA≤I_{OUT}≤1A, 6V≤V_{IN}≤16V
	2.437	2.5	2.563		•	
Output Voltage - SPX3940 (2%)	2.450	2.5	2.550	V		
	2.412	2.5	2.588		•	
3.3V version						
Output Voltage - SPX3940A (1%)	3.267	3.3	3.333	V		I_{OUT}=10mA 10mA≤I_{OUT}≤1A, 6V≤V_{IN}≤16V
	3.217	3.3	3.383		•	
Output Voltage - SPX3940 (2%)	3.234	3.3	3.366	V		
	3.184	3.3	3.416		•	
5.0V version						
Output Voltage - SPX3940A (1%)	4.950	5.0	5.050	V		I_{OUT}=10mA 10mA≤I_{OUT}≤1A, 6V≤V_{IN}≤16V
	4.875	5.0	5.125		•	
Output Voltage - SPX3940 (2%)	4.900	5.0	5.100	V		
	4.825	5.0	5.175		•	
All Voltage Options						
Line Regulation		0.2	1.0	%		I_{OUT}=10mA, (V_{OUT} +1V)≤V_{IN}≤16V
Load Regulation		0.3	1.5	%		V_{IN} = V_{OUT} +1V,10mA≤I_{OUT}≤1A
$\frac{\Delta V}{\Delta T}$ - Output Voltage temperature Coefficient		20	100	ppm/°C	•	
Dropout Voltage[2] (except 1.8V version)		70	200	mV	•	I_{OUT}=100mA
		280	550	mV	•	I_{OUT}=1A
Ground Current[3]		12	25	mA	•	I_{OUT}=750mA, V_{IN} = V_{OUT} +1V
		18		mA		I_{OUT}=1A
I_{GNDDO} Ground Pin Current at Dropout		1.2		mA		V_{IN} = 0.1V less than specified V_{OUT} I_{OUT}=10mA,
Current Limit	1.5	2.2		A		V_{OUT} = 0V[4]
Output Noise Voltage		400		μV_{RMS}		10Hz-100KHz, I_L=100mA, C_L=10µF
		260		μV_{RMS}		10Hz-100KHz, I_L=100mA, C_L=33µF

Downloaded from Arrow.com.

Note 2: Dropout voltage is defined as the input to output differential when the output voltage drops to 99% of its normal value.
Note 3: Ground pin current is the regulator quiescent current. The total current drawn from the source is the sum of the load current to the ground current.
Note 4: $V_{IN}=V_{OUT(NOMINAL)}+1V$. For example, use $V_{IN}=4.3V$ for a 3.3V regulator. Employ pulse-testing procedures to minimize temperature rise.

BLOCK DIAGRAM

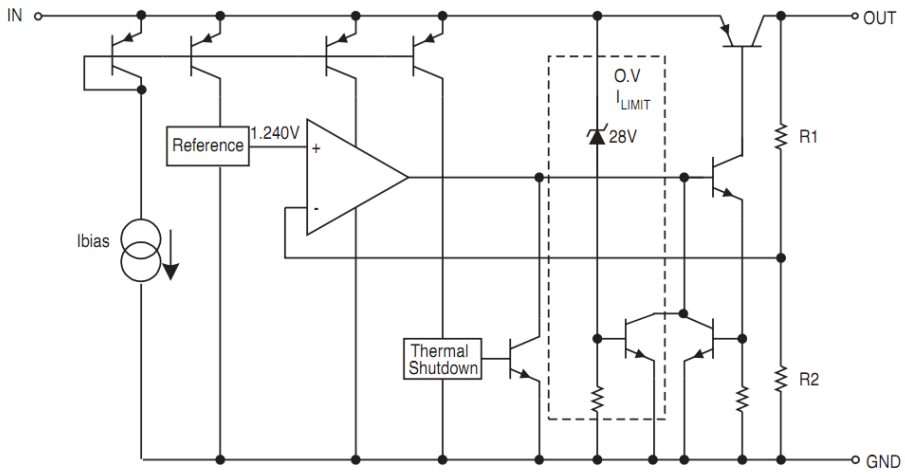

Fig. 2: SPX3940 Block Diagram

PIN ASSIGNMENT

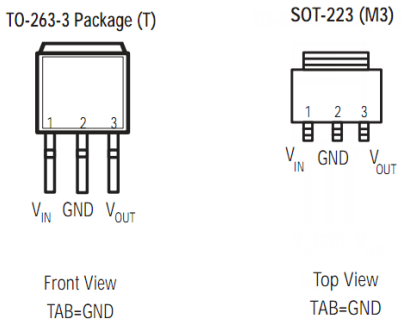

Fig. 3: SPX3940 Pin Assignment

Downloaded from Arrow.com.

ORDERING INFORMATION

Part Number	Temperature Range	Marking	Package	Packing Quantity	Note 1	Note 2
SPX3940AM3-L-1-8	-40°C≤T_J≤+125°C	3940A 18YYWWL XXX	3-pin SOT-223	2.5K/Tape & Reel	Lead Free	1.8V Output Voltage – 1%
SPX3940AM3-L-1-8/TR				Bulk		
SPX3940AM3-L-2-5	-40°C≤T_J≤+125°C	3940A 25YYWWL XXX	3-pin SOT-223	2.5K/Tape & Reel	Lead Free	2.5V Output Voltage – 1%
SPX3940AM3-L-2-5/TR				Bulk		
SPX3940AM3-L-3-3	-40°C≤T_J≤+125°C	3940A 33YYWWL XXX	3-pin SOT-223	2.5K/Tape & Reel	Lead Free	3.3V Output Voltage – 1%
SPX3940AM3-L-3-3/TR				Bulk		
SPX3940AM3-L-5-0	-40°C≤T_J≤+125°C	3940A 50YYWWL XXX	3-pin SOT-223	2.5K/Tape & Reel	Lead Free	5.0V Output Voltage – 1%
SPX3940AM3-L-5-0/TR				Bulk		
SPX3940AT-L-1-8	-40°C≤T_J≤+125°C	SPX3940AT 18YYWWLX	3-pin TO-263	500/Tape & Reel	Lead Free	1.8V Output Voltage – 1%
SPX3940AT-L-1-8/TR				Bulk		
SPX3940AT-L-3-3	-40°C≤T_J≤+125°C	SPX3940AT 33YYWWLX	3-pin TO-263	500/Tape & Reel	Lead Free	3.3V Output Voltage – 1%
SPX3940AT-L-3-3/TR				Bulk		
SPX3940AT-L-5-0	-40°C≤T_J≤+125°C	SPX3940AT 50YYWWLX	3-pin TO-263	500/Tape & Reel	Lead Free	5.0V Output Voltage – 1%
SPX3940AT-L-5-0/TR				Bulk		
SPX3940M3-L-2-5	-40°C≤T_J≤+125°C	3940M3 25YYWWL	3-pin SOT-223	2.5K/Tape & Reel	Lead Free	2.5V Output Voltage – 2%
SPX3940M3-L-2-5/TR				Bulk		
SPX3940M3-L-3-3	-40°C≤T_J≤+125°C	3940M3 33YYWWL	3-pin SOT-223	2.5K/Tape & Reel	Lead Free	3.3V Output Voltage – 2%
SPX3940M3-L-3-3/TR				Bulk		
SPX3940M3-L-5-0	-40°C≤T_J≤+125°C	3940M3 50YYWWL	3-pin SOT-223	2.5K/Tape & Reel	Lead Free	5.0V Output Voltage – 2%
SPX3940M3-L-5-0/TR				Bulk		
SPX3940T-L-3-3	-40°C≤T_J≤+125°C	SPX3940T 33YYWWLX	3-pin TO-263	500/Tape & Reel	Lead Free	3.3V Output Voltage – 2%
SPX3940T-L-3-3/TR				Bulk		
SPX3940T-L-5-0	-40°C≤T_J≤+125°C	SPX3940T 33YYWWLX	3-pin TO-263	500/Tape & Reel	Lead Free	5.0V Output Voltage – 2%
SPX3940T-L-5-0/TR				Bulk		

"YY" = Year – "WW" = Work Week – "X" = Lot Number – when applicable.

Downloaded from Arrow.com.

TYPICAL PERFORMANCE CHARACTERISTICS

Schematic and BOM from Application Information section of this datasheet.

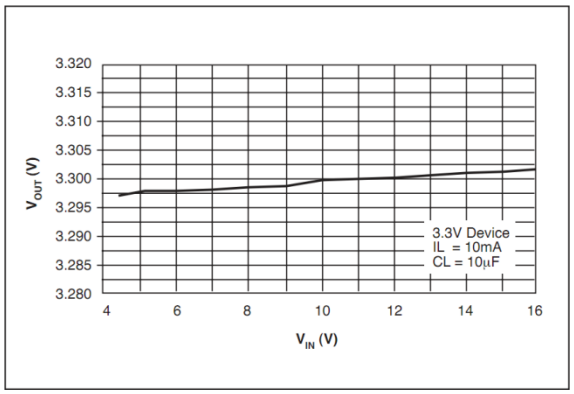

Fig. 4: Line Regulation

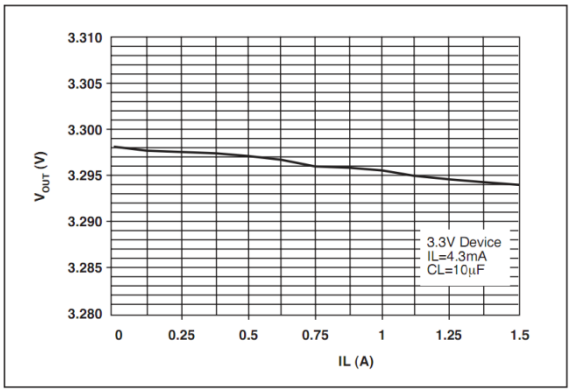

Fig. 5: Load Regulation

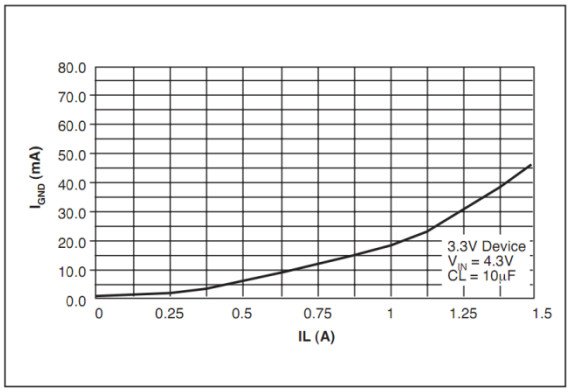

Fig. 6: Ground Current vs Load Current

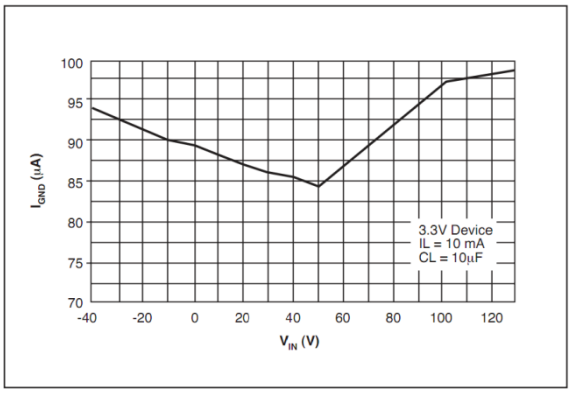

Fig. 7: Ground Current vs Input Voltage

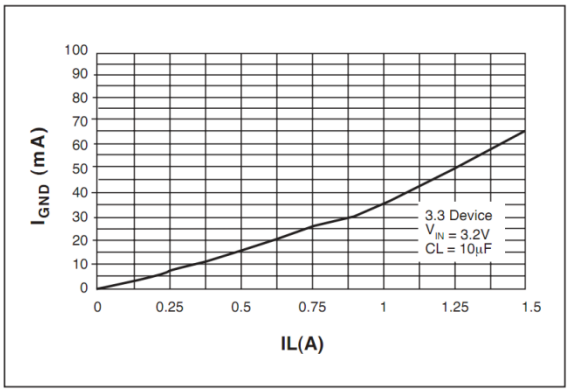

Fig. 8: Ground Current vs Load Current in Dropout

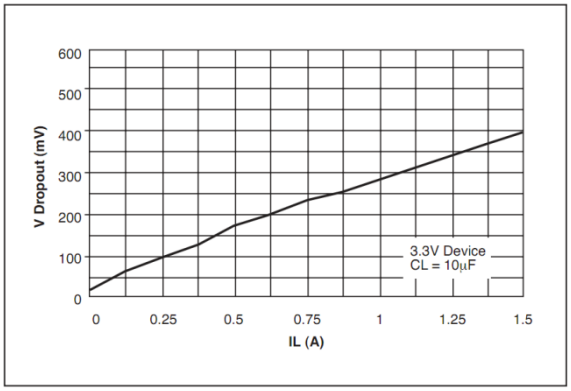

Fig. 9: Dropout Voltage vs Load Current

Downloaded from Arrow.com.

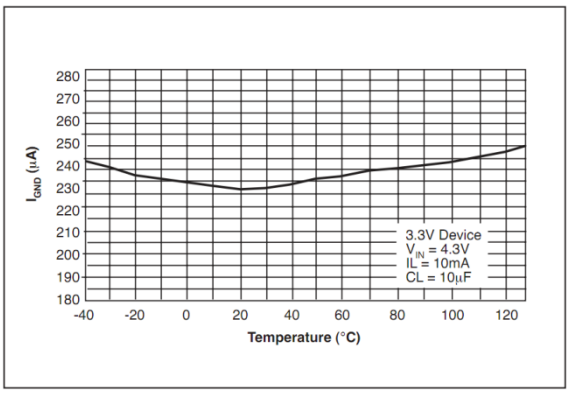

Fig. 10: Ground Current vs Temperature
I_{LOAD}=100mA

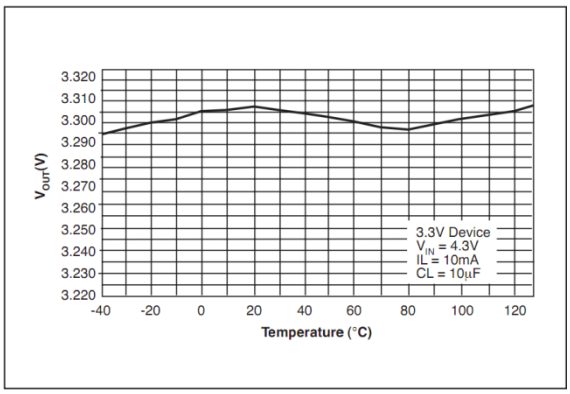

Fig. 11: Output Voltage vs Temperature
I_{LOAD}=100mA

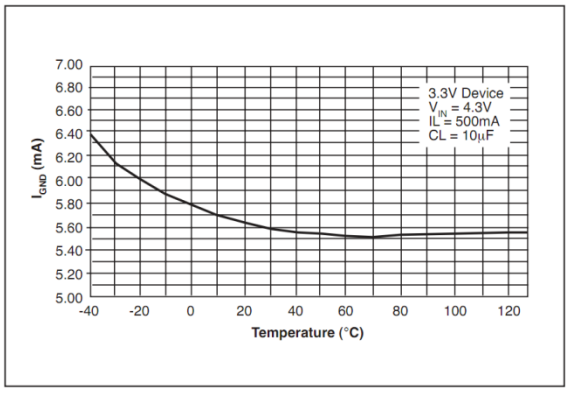

Fig. 12: Ground Current vs Temperature
I_{LOAD}=500mA

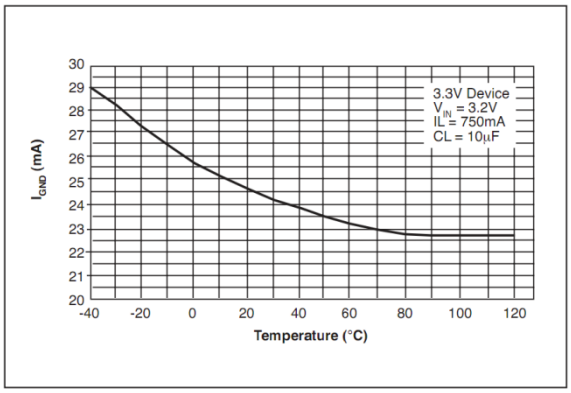

Fig. 13: Ground Current vs Temperature
Dropout, I_{LOAD}=750mA

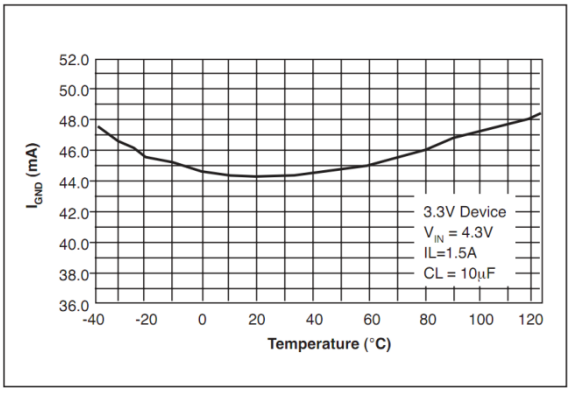

Fig. 14: Ground Current vs Temperature
I_{LOAD}=1.5A

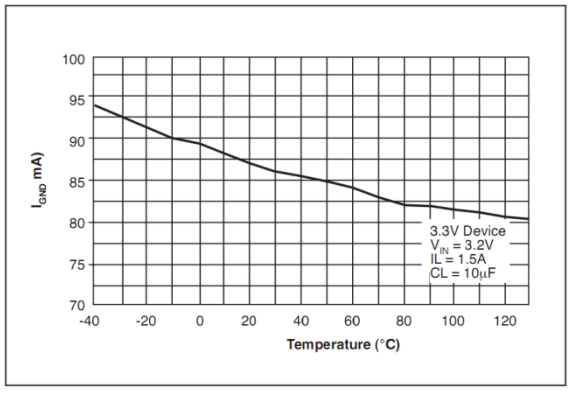

Fig. 15: Ground Current vs Temperature
Dropout, I_{LOAD}=1.5A

Downloaded from Arrow.com.

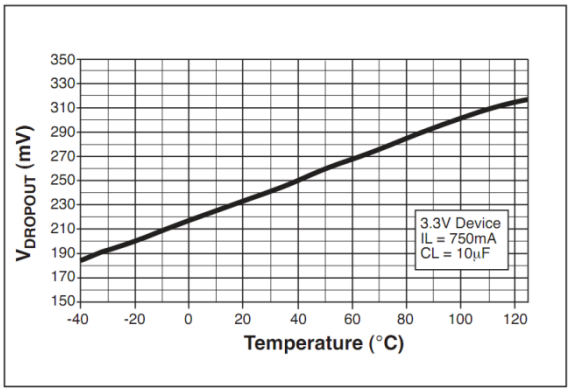

Fig. 16: Dropout Voltage vs Temperature
I_{LOAD}=750mA

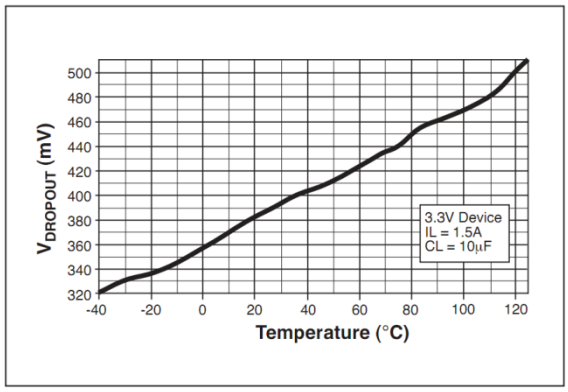

Fig. 17: Dropout Voltage vs Temperature
I_{LOAD}=1.5A

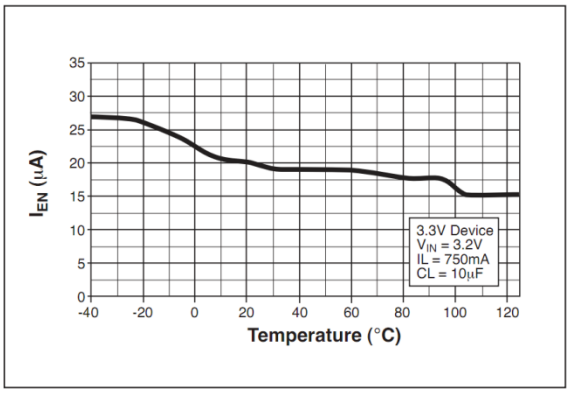

Fig. 18: Enable Current vs Temperature
V_{EN}=16V

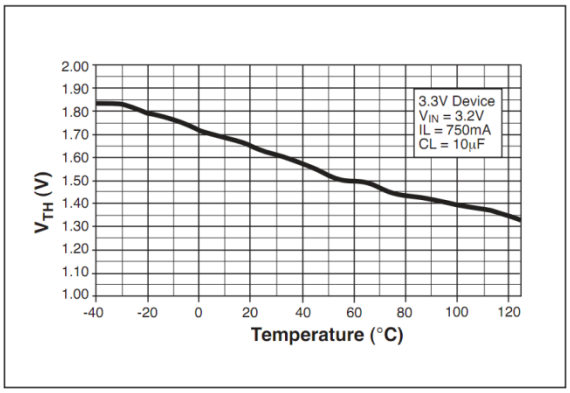

Fig. 19: Enable Threshold vs Temperature

Downloaded from Arrow.com.

THEORY OF OPERATION

The SPX3940 incorporates protection against over-current faults, reversed load insertion, over temperature operation, and positive and negative transient voltage.

THERMAL CONSIDERATIONS

Although the SPX3940 offers limiting circuitry for overload conditions, it is still necessary to insure that the maximum junction temperature is not exceeded in the application. Heat will flow through the lowest resistance path, the junction-to-case path. In order to insure the best thermal flow of the component, proper mount-ing is required. Consult heatsink manufacturer for thermal resistance and design of heatsink.

TO-220 Design Example:

Assume that V_{IN} = 10V, V_{OUT} = 5V, I_{OUT} = 1.5A, T_A = 50°C/W, θ_{HA}= 1°C/W, θ_{CH} = 2°C/W, and θ_{JC} = 3°C/W.

Where T_A = ambient temperature

θ_{HA} = heatsink to ambient thermal resistance

θ_{CH} = case to heatsink thermal resistance

θ_{JC} = junction to case thermal resistance

The power calculated under these conditions is:

$$P_D = (V_{IN} - V_{OUT}) * I_{OUT} = 7.5W.$$

And the junction temperature is calculated as

$T_J = T_A + P_D * (\theta_{HA} + \theta_{CH} + \theta_{JC})$ or

$T_J = 50 + 7.5 * (1 + 2 + 3) = 95°C$

Reliable operation is insured.

CAPACITOR REQUIREMENTS

The output capacitor is needed to insure stability and minimize the output noise. The value of the capacitor varies with the load. However, a minimum value of 10µF aluminum capacitor will guarantee stability over all load conditions. A tantalum capacitor is recommended if a faster load transient response is needed.

If the power source has a high AC impedance, a 0.1µF ceramic capacitor between input & ground is recommended.

MINIMUM LOAD CURRENT

To ensure a proper behavior of the regulator under light load, a minimum load of 5mA for SPX3940 is required.

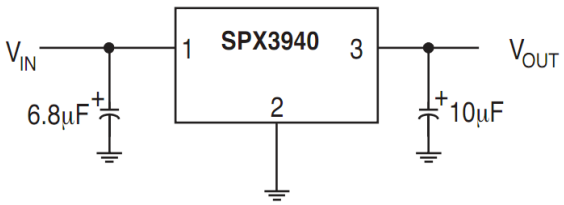

Fig. 20: Fixed Output Linear Regulator

Downloaded from Arrow.com.

PACKAGE SPECIFICATION

3-PIN SOT-223

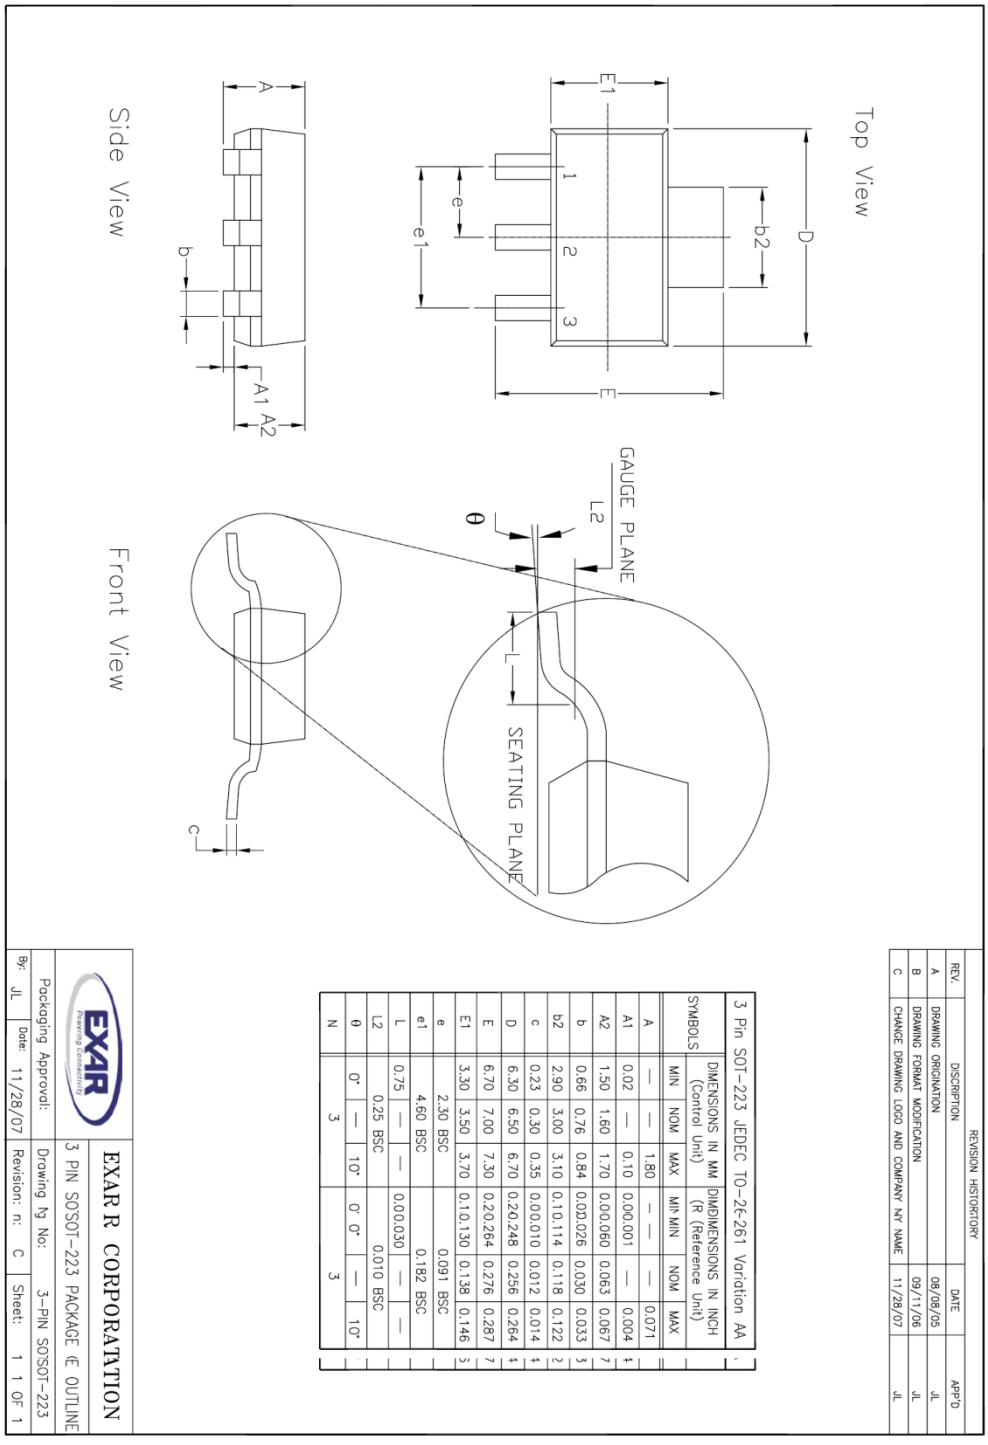

REVISION HISTORY			
REV.	DISCRIPTION	DATE	APP'D
A	DRAWING ORIGINATION	08/08/05	JL
B	DRAWING FORMAT MODIFICATION	09/11/06	JL
C	CHANGE DRAWING LOGO AND COMPANY NY NAME	11/28/07	JL

3 Pin SOT-223 JEDEC TO-26-261 Variation AA

SYMBOLS	DIMENSIONS IN MM (Control Unit)			DIMENSIONS IN INCH (R (Reference Unit)		
	MIN	NOM	MAX	MIN MIN	NOM	MAX
A	—	—	1.80	— —	—	0.071
A1	0.02	—	0.10	0.00.001	—	0.004
A2	1.50	1.60	1.70	0.00.060	0.063	0.067
b	0.66	0.76	0.84	0.00.026	0.030	0.033
b2	2.90	3.00	3.10	0.10.114	0.118	0.122
c	0.23	0.30	0.35	0.00.010	0.012	0.014
D	6.30	6.50	6.70	0.20.248	0.256	0.264
E	6.70	7.00	7.30	0.20.264	0.276	0.287
E1	3.30	3.50	3.70	0.10.130	0.138	0.146
e	2.30 BSC			0.091 BSC		
e1	4.60 BSC			0.182 BSC		
L	0.75	—	—	0.00.030	—	—
L2	0.25 BSC			0.010 BSC		
θ	0°	—	10°	0° 0°	—	10°
N	3			3		

EXAR R CORPORATION

3 PIN SOTSOT-223 PACKAGE (E OUTLINE

By: JL	Date: 11/28/07	Packaging Approval:	Drawing ng No: 3-PIN SOTSOT-223	Revision: n: C	Sheet: 1 1 OF 1

Downloaded from Arrow.com.

3-PIN TO-263

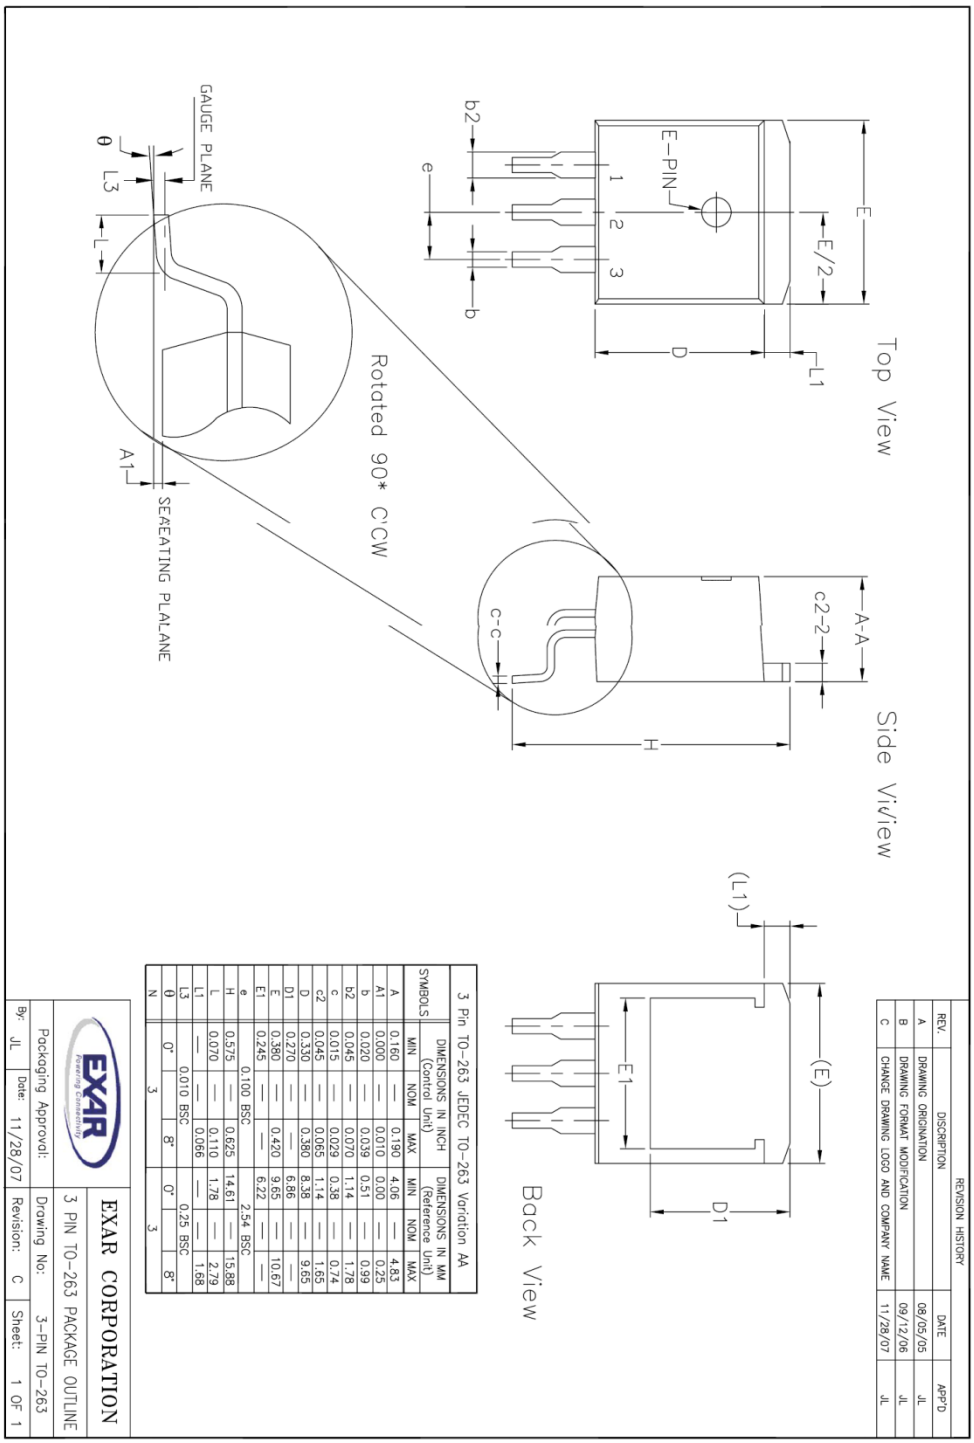

Downloaded from Arrow.com.

REVISION HISTORY

Revision	Date	Description
A	04/14/2006	
1.0.0	02/29/2012	Reformat of Datasheet Package drawing corrections

FOR FURTHER ASSISTANCE

Email: customersupport@exar.com

Exar Technical Documentation: http://www.exar.com/TechDoc/default.aspx?

EXAR CORPORATION

HEADQUARTERS AND SALES OFFICES

48720 Kato Road

Fremont, CA 94538 – USA

Tel.: +1 (510) 668-7000

Fax: +1 (510) 668-7030

www.exar.com

NOTICE

EXAR Corporation reserves the right to make changes to the products contained in this publication in order to improve design, performance or reliability. EXAR Corporation assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. Charts and schedules contained here in are only for illustration purposes and may vary depending upon a user's specific application. While the information in this publication has been carefully checked; no responsibility, however, is assumed for inaccuracies.

EXAR Corporation does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless EXAR Corporation receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of EXAR Corporation is adequately protected under the circumstances.

Reproduction, in part or whole, without the prior written consent of EXAR Corporation is prohibited.

Downloaded from Arrow.com.