


## RO3073A-11

### 315.00 MHz SAW Resonator



SM5035-4

- **Designed for 315.00 MHz Transmitters**
- **Very Low Series Resistance**
- **Quartz Stability**
- **Surface-mount Ceramic Case**
- **Complies with Directive 2002/95/EC (RoHS)**



The RO3073A-11 is a one-port surface-acoustic-wave (SAW) resonator packaged in a surface-mount ceramic case. It provides reliable, fundamental-mode quartz frequency stabilization of fixed-frequency transmitters operating at 315.00 MHz. The RO3073A-11 is designed specifically for remote-control and wireless security transmitter applications.

#### Absolute Maximum Ratings

Rating	Value	Units
CW RF Power Dissipation (See: Typical Test Circuit)	+0	dBm
DC Voltage Between Terminals (Observe ESD Precautions)	±30	VDC
Case Temperature	-40 to +85	°C
Soldering Temperature (10 seconds / 5 cycles maximum)	260	°C

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency, +25 °C Absolute Frequency Tolerance from 315.00 MHz	$f_C$	2,3,4,5	314.925		315.075	MHz
	$\Delta f_C$				±75	kHz
Insertion Loss	IL	2,5,6		1.5	2.2	dB
Quality Factor Unloaded Q 50 $\Omega$ Loaded Q	$Q_U$	5,6,7		8000		
	$Q_L$			1300		
Temperature Stability Turnover Temperature Turnover Frequency Frequency Temperature Coefficient	$T_O$	6,7,8	10	25	40	°C
	$f_O$			$f_C$		
	FTC			0.032		ppm/°C <sup>2</sup>
Frequency Aging Absolute Value during the First Year	$ f_A $	1		≤10		ppm/yr
DC Insulation Resistance between Any Two Terminals		5	1.0			M $\Omega$
RF Equivalent RLC Model Motional Resistance Motional Inductance Motional Capacitance Shunt Static Capacitance	$R_M$	5, 7, 9		19.4		$\Omega$
	$L_M$			78.4		$\mu$ H
	$C_M$			3.3		fF
	$C_O$	5, 6, 9		4.1		pF
Test Fixture Shunt Inductance	$L_{TEST}$	2, 7		64.2		nH
Lid Symbolization (in addition to Lot and/or Date Codes)	907 // YYWWS					
Standard Reel Quantity 13 inch Reel Size		10	4000 pieces/reel			


**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**

#### NOTES:

- Frequency aging is the change in  $f_C$  with time and is specified at +65 °C or less. Aging may exceed the specification for prolonged temperatures above +65 °C. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
- The center frequency,  $f_C$ , is measured at the minimum insertion loss point,  $IL_{MIN}$ , with the resonator in the 50  $\Omega$  test system ( $VSWR \leq 1.2:1$ ). The shunt inductance,  $L_{TEST}$ , is tuned for parallel resonance with  $C_O$  at  $f_C$ . Typically,  $f_{OSCILLATOR}$  or  $f_{TRANSMITTER}$  is approximately equal to the resonator  $f_C$ .
- One or more of the following United States patents apply: 4,454,488 and 4,616,197.
- Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
- Unless noted otherwise, case temperature  $T_C = +25 \pm 2$  °C.
- The design, manufacturing process, and specifications of this device are subject to change without notice.
- Derived mathematically from one or more of the following directly measured parameters:  $f_C$ , IL, 3 dB bandwidth,  $f_C$  versus  $T_C$ , and  $C_O$ .
- Turnover temperature,  $T_O$ , is the temperature of maximum (or turnover) frequency,  $f_O$ . The nominal frequency at any case temperature,  $T_C$ , may be calculated from:  $f = f_O [1 - FTC (T_O - T_C)^2]$ . Typically *oscillator*  $T_O$  is approximately equal to the specified *resonator*  $T_O$ .
- This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance  $C_O$  is the static (nonmotional) capacitance between the two terminals measured at low frequency (10 MHz) with a capacitance meter. The measurement includes parasitic capacitance with "NC" pads unconnected. Case parasitic capacitance is approximately 0.05 pF. Transducer parallel capacitance can be calculated as:  $C_P \approx C_O - 0.05$  pF.
- Tape and Reel standard per ANSI / EIA 481.


## Electrical Connections

The SAW resonator is bidirectional and may be installed with either orientation. The two terminals are interchangeable and unnumbered. The callout NC indicates no internal connection. The NC pads assist with mechanical positioning and stability. External grounding of the NC pads is recommended to help reduce parasitic capacitance in the circuit.




### Typical Test Circuit

The test circuit inductor,  $L_{\text{TEST}}$ , is tuned to resonate with the static capacitance,  $C_0$ , at  $F_C$ .

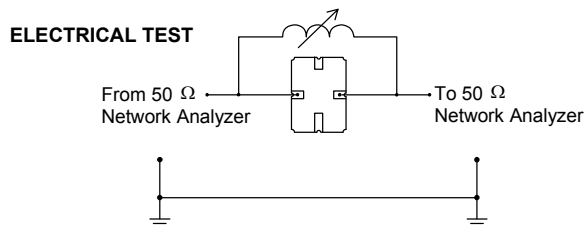


## POWER TEST

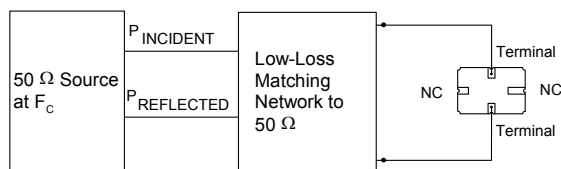


CW RF Power Dissipation =  $P_{\text{INCIDENT}} - P_{\text{REFLECTED}}$

## Typical Application Circuits


## Typical Low-Power Transmitter Application

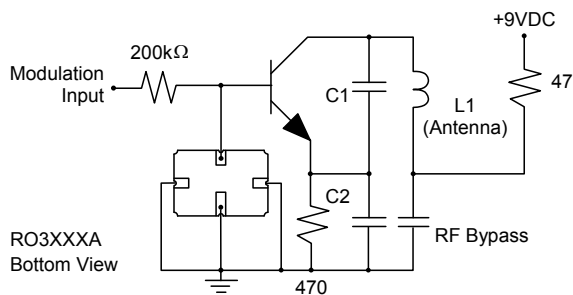

## Typical Local Oscillator Applications

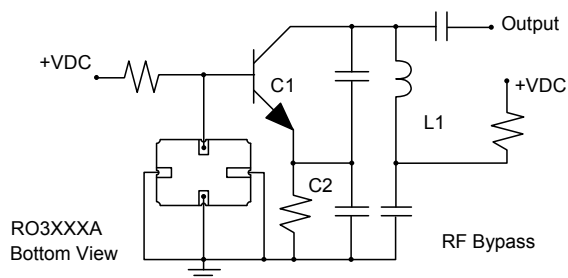


### Equivalent RLC Model

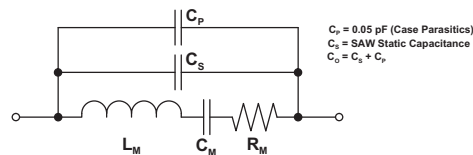


## Temperature Characteristics

The curve shown on the right accounts for resonator contribution only and does not include LC component temperature contributions.

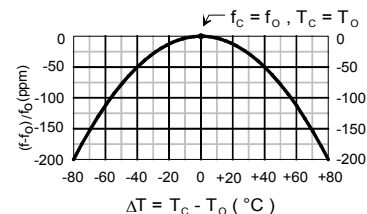

## Case

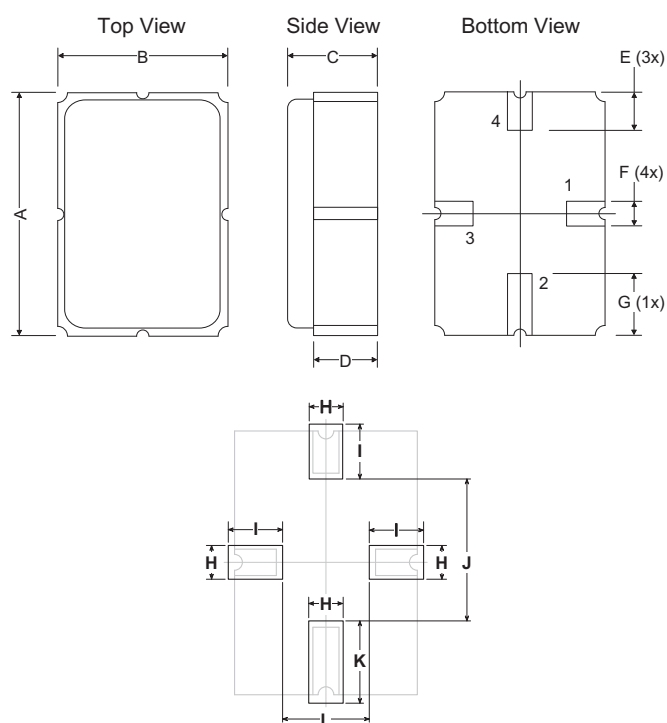

### PCB Land Pattern Top View

Dimensions	Millimeters			Inches		
	Min	Nom	Max	Min	Nom	Max
A	4.87	5.00	5.13	0.191	0.196	0.201
B	3.37	3.50	3.63	0.132	0.137	0.142
C	1.45	1.53	1.60	0.057	0.060	0.062
D	1.35	1.43	1.50	0.040	0.057	0.059
E	0.67	0.80	0.93	0.026	0.031	0.036
F	0.37	0.50	0.63	0.014	0.019	0.024
G	1.07	1.20	1.33	0.042	0.047	0.052
H	-	1.04	-	-	0.041	-
I	-	1.46	-	-	0.058	-
J	-	3.01	-	-	0.119	-
K	-	1.44	-	-	0.057	-
L	-	1.92	-	-	0.076	-