

2N4058 2N4061  
2N4059 2N4062  
2N4060

**SILICON  
PNP TRANSISTORS**



**TO-92 CASE**



[www.centrasemi.com](http://www.centrasemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR 2N4058 series devices are silicon PNP transistors designed for low level, low noise (2N4058), low level, high gain (2N4059, 2N4060, 2N4061, 2N4062) applications. Recommended NPN complementary series is 2N3707 thru 2N3711.

**MARKING: FULL PART NUMBER**

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$ )

Collector-Base Voltage  
Collector-Emitter Voltage  
Emitter-Base Voltage  
Continuous Collector Current  
Power Dissipation  
Operating and Storage Junction Temperature

**SYMBOL**

$V_{CBO}$  30  
 $V_{CEO}$  30  
 $V_{EBO}$  6.0  
 $I_C$  200  
 $P_D$  625  
 $T_J, T_{stg}$  -65 to +150

**UNITS**

V  
V  
V  
mA  
mW  
 $^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
$I_{CBO}$	$V_{CB}=20\text{V}$		100	nA
$I_{EBO}$	$V_{EB}=6.0\text{V}$		100	nA
$BV_{CEO}$	$I_C=1.0\text{mA}$	30		V
$V_{CE(SAT)}$	$I_C=10\text{mA}, I_B=0.5\text{mA}$		0.7	V
$V_{BE(ON)}$	$V_{CE}=5.0\text{V}, I_C=1.0\text{mA}$	0.5	1.0	V
NF	$V_{CE}=5.0\text{V}, I_C=100\mu\text{A}, R_G=5.0\text{K}\Omega$ , BW=15.7kHz (2N4058 only)		5.0	dB

SYMBOL	TEST CONDITIONS	2N4058		2N4059		2N4060		2N4061		2N4062	
		MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
$h_{FE}$	$V_{CE}=5.0\text{V}, I_C=100\mu\text{A}$	100	400	-	-	-	-	-	-	-	-
$h_{FE}$	$V_{CE}=5.0\text{V}, I_C=1.0\text{mA}$	-	-	45	660	45	165	90	330	180	660
$h_{fe}$	$V_{CE}=5.0\text{V}, I_C=100\mu\text{A}, f=1.0\text{kHz}$	100	550	-	-	-	-	-	-	-	-
$h_{fe}$	$V_{CE}=5.0\text{V}, I_C=1.0\text{mA}, f=1.0\text{kHz}$	-	-	45	800	45	250	90	450	180	800


R1 (13-March 2014)

2N4058 2N4061  
2N4059 2N4062  
2N4060

SILICON  
PNP TRANSISTORS



# TO-92 CASE - MECHANICAL OUTLINE

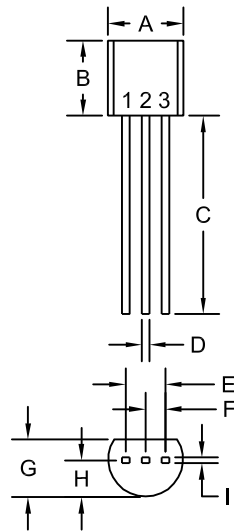

R1

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.175	0.205	4.45	5.21
B	0.170	0.210	4.32	5.33
C	0.500	-	12.70	-
D	0.016	0.022	0.41	0.56
E	0.100		2.54	
F	0.050		1.27	
G	0.125	0.165	3.18	4.19
H	0.080	0.105	2.03	2.67
I	0.015		0.38	

TO-92 (REV: R1)

## LEAD CODE:

- 1) Emitter
- 2) Collector
- 3) Base

## MARKING:

FULL PART NUMBER

R1 (13-March 2014)

[www.centrasemi.com](http://www.centrasemi.com)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)