

## Description

The ZR431 is a three terminal adjustable shunt regulator offering excellent temperature stability and output current handling capability up to 100mA. The output voltage may be set to any chosen voltage between 2.5 and 20 volts by selection of two external divider resistors.



The devices can be used as a replacement for Zener diodes in many applications requiring an improvement in Zener performance.

## Features

- Surface-Mount SOT223 and SOT23 Packages
- 2%, 1% and 0.5% Tolerance
- Max. Temperature Coefficient 72ppm/°C
- Temperature Compensated for Operation
- Over the Full Temperature Range
- Programmable Output Voltage
- 50µA to 100mA Current Sink Capability
- Low Output Noise
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/104/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please [contact us](https://www.diodes.com/quality/product-definitions/) or your local Diodes representative.**

<https://www.diodes.com/quality/product-definitions/>

## Pin Assignments




Pin 4 floating or connected to Pin 2.

## Applications

- Shunt regulators
- Series regulators
- Voltage monitors
- Overvoltage/undervoltage protections
- Switch mode power supplies

- Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
  2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
  3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

## Typical Application Circuit

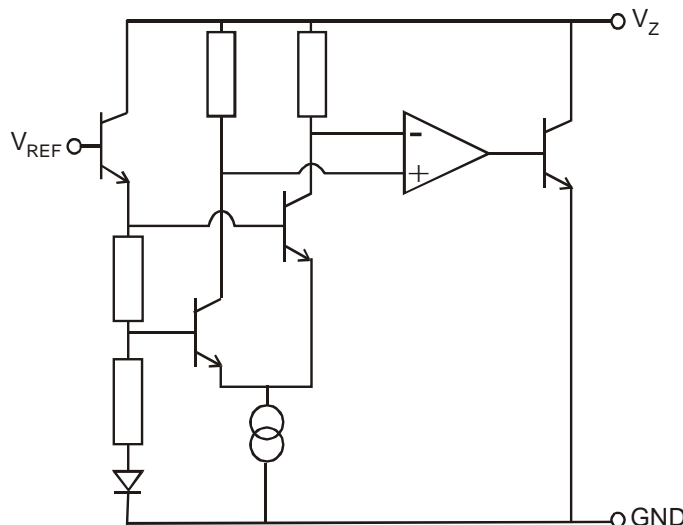

## Absolute Maximum Ratings (Note 4)

Symbol	Parameter		Rating	Unit
$V_Z$	Cathode Voltage		20	V
$I_Z$	Cathode Current		150	mA
$T_J$	Operating Junction Temperature Range		-40 to +150	°C
$T_{ST}$	Storage Temperature		-55 to +125	°C
$P_D$	Power Dissipation (Notes 5 & 6)	SOT23	330	mW
		SOT223	2	W

Notes:

- Stresses greater than those listed under *Absolute Maximum Ratings* can cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to *Absolute Maximum Ratings* for extended periods can affect device reliability. Unless otherwise stated, voltages specified are relative to the GND pin.
- $T_J$ , max = +150°C.
- Ratings apply to ambient temperature at +25°C.

## Recommended Operating Conditions ( $T_A = +25^\circ\text{C}$ )

Symbol	Parameter	Min	Max	Unit
$V_Z$	Cathode Voltage	$V_{REF}$	20	V
$I_Z$	Cathode Current	0.05	100	mA
$T_A$	Operating Temperature	-40	+125	°C

## Electrical Characteristics ( $T_A = +25^\circ\text{C}$ , unless otherwise specified.)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$V_{REF}$	Reference Voltage (Note 7)	$I_L = 10\text{mA}$ (Figure 1) $V_Z = V_{REF}$	2%	2.45	2.50	V
			1%	2.475	2.50	
			0.5%	2.487	2.50	
$V_{DEV}$	Deviation of Reference Input Voltage over Temperature	$I_L = 10\text{mA}$ , $V_Z = V_{REF}$ $T_A = \text{Full Range}$ (Figure 1)	—	10	30	mV
$\frac{\Delta V_{REF}}{\Delta V_Z}$	Ratio of the Change in Reference Voltage to the Change in Cathode Voltage	$V_Z$ from $V_{REF}$ to 10V, $I_Z = 10\text{mA}$ (Figure 2)	—	-1.85	-2.7	mV/V
		$V_Z$ from 10V to 20V, $I_Z = 10\text{mA}$ (Figure 2)	—	-1.0	-2.0	
$I_{REF}$	Reference Input Current	$R1 = 10\text{k}$ , $R2 = \text{O/C}$ , $I_L = 10\text{mA}$ (Figure 2)	—	0.12	1.0	$\mu\text{A}$
$\Delta I_{REF}$	Deviation of Reference Input Current over Temperature	$R1 = 10\text{k}$ , $R2 = \text{O/C}$ , $I_L = 10\text{mA}$ $T_A = \text{Full Range}$ (Figure 2)	—	0.04	0.2	$\mu\text{A}$
$I_{Z(MIN)}$	Minimum Cathode Current for Regulation	$V_Z = V_{REF}$ (Figure 1)	—	35	50	$\mu\text{A}$
$I_{Z(OFF)}$	Off-State Current	$V_Z = 20\text{V}$ , $V_{REF} = 0\text{V}$ (Figure 3)	—	—	0.1	$\mu\text{A}$
$R_Z$	Dynamic Output Impedance	$V_Z = V_{REF}$ (Figure 1), $f = 0\text{Hz}$	—	—	0.75	$\Omega$

Note:

- 0.5% and 1% SOT23 only.  
For definitions of reference voltage temperature coefficient and dynamic output impedance see Notes following *DC Test Circuits*.

## DC Test Circuits

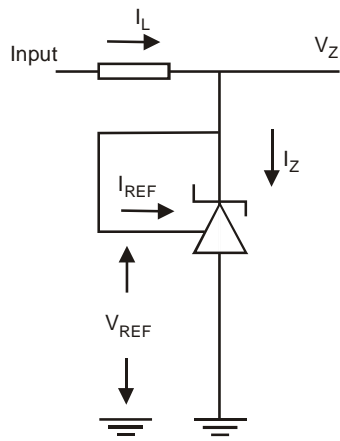


Figure 1. Test Circuit for  $V_Z = V_{REF}$

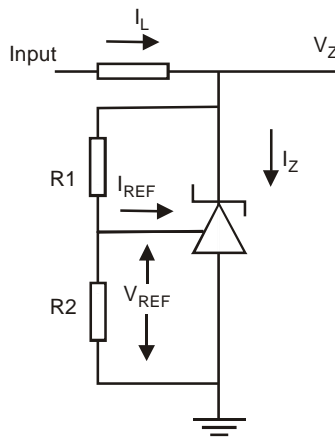


Figure 2. Test Circuit for  $V_Z > V_{REF}$


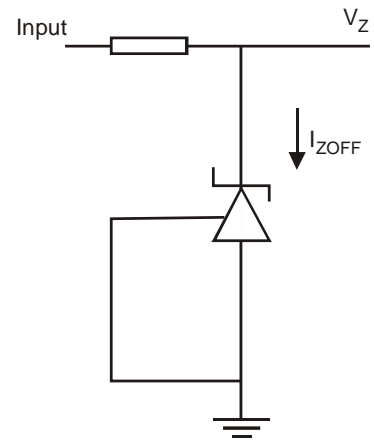


Figure 3. Test Circuit for Off State Current

Deviation of reference input voltage,  $V_{DEV}$ , is defined as the maximum variation of the reference input voltage over the full temperature range.

The average temperature coefficient of the reference input voltage,  $V_{REF}$  is defined as:

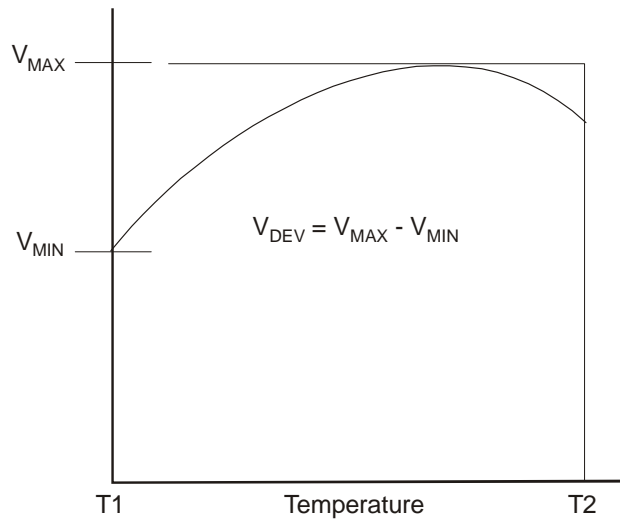

$$V_{ref} (\text{ppm}/^{\circ}\text{C}) = \frac{V_{dev} \times 1000000}{V_{ref} (T1 - T2)}$$







The dynamic output impedance,  $R_z$  is defined as:

$$R_z = \frac{\Delta V_z}{\Delta I_z}$$




When the device is programmed with two external resistors,  $R1$  and  $R2$ , (Figure 2), the dynamic output impedance of the overall circuit,  $R'$ , is defined as:

$$R' = R_z \left( 1 + \frac{R1}{R2} \right)$$



## Typical Characteristics

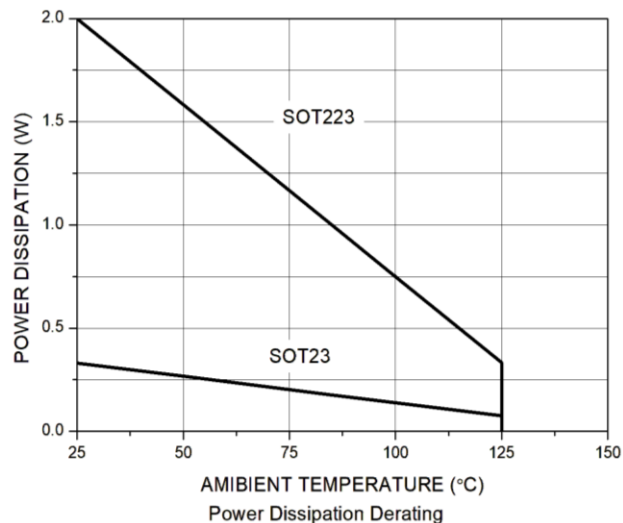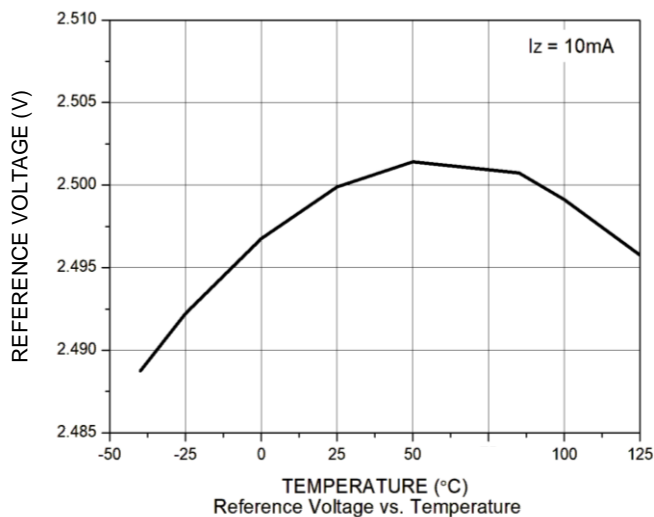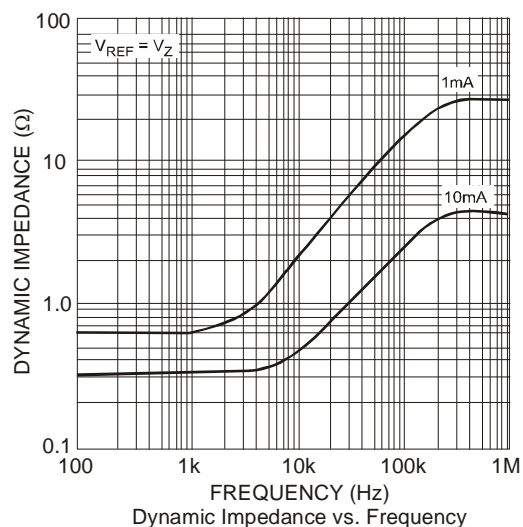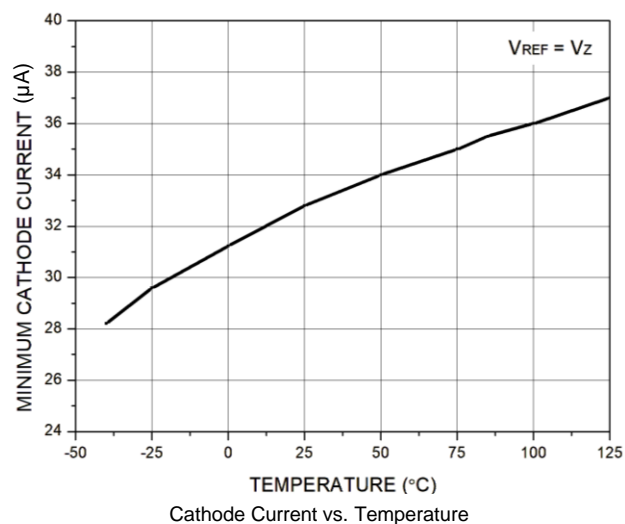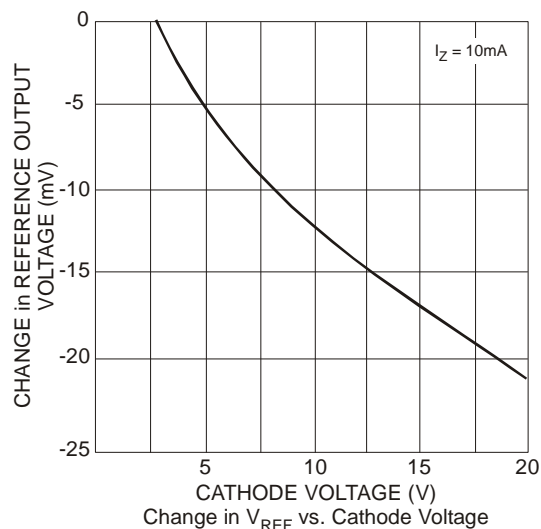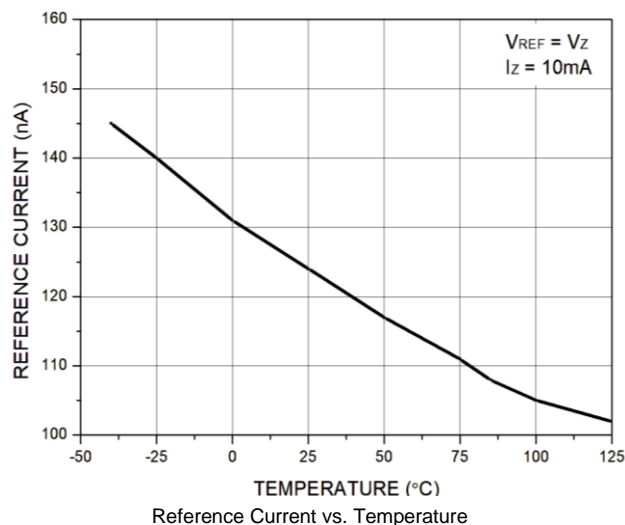

## Typical Characteristics (continued)

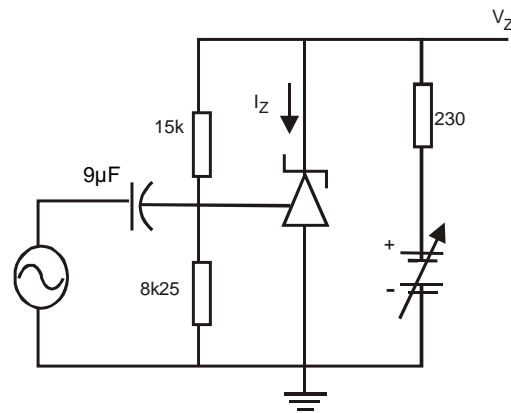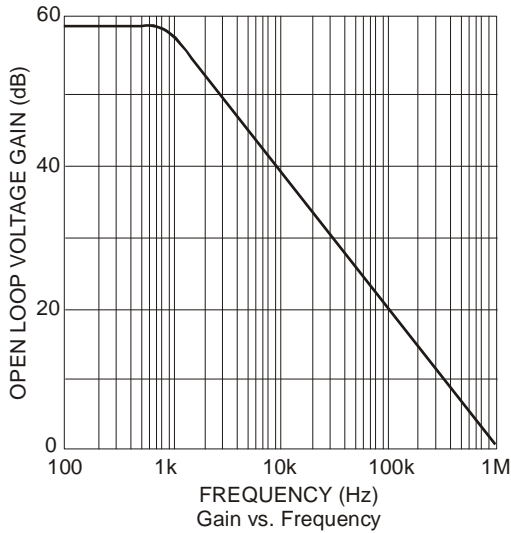
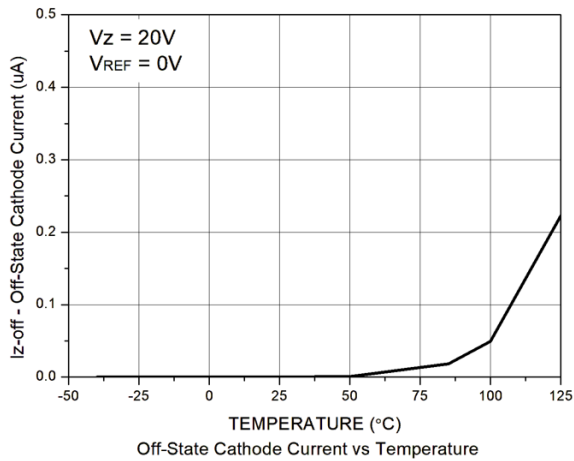


$I_Z = 10mA$ ,  $T_A = +25^{\circ}C$   
**Test Circuit for Open-Loop Voltage Gain**

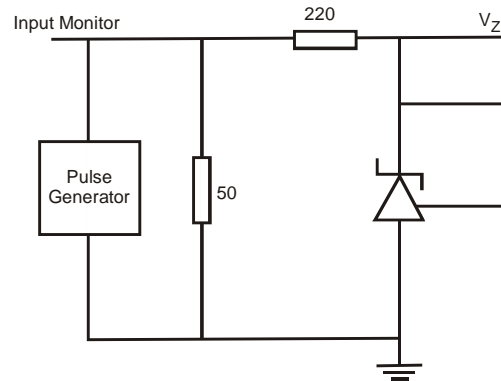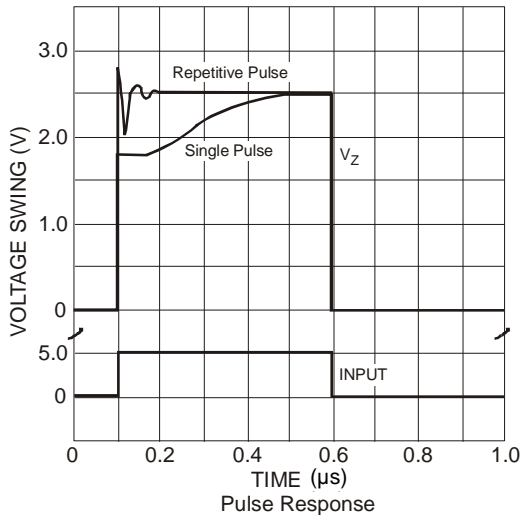


$T_A = +25^{\circ}C$   
**Test Circuit for Pulse Response**

## Typical Characteristics (continued)

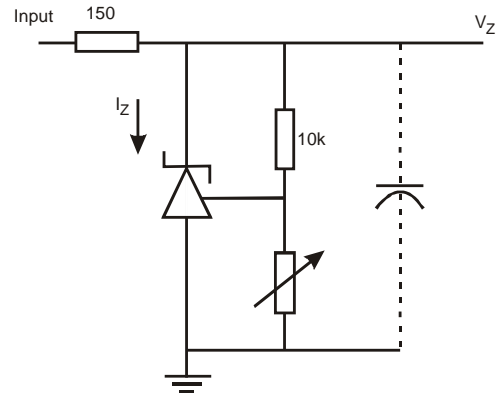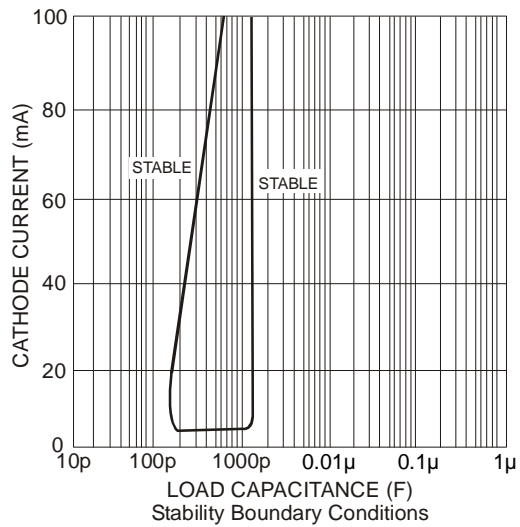


$V_{REF} < V_Z < 20V$ ,  $I_Z = 10mA$ ,  $T_A = +25^\circ C$   
**Test Circuit for Stability Boundary Conditions**

## Application Characteristics

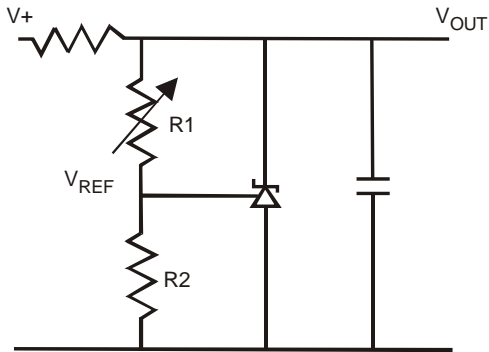


$$V_{OUT} = \left(1 + \frac{R1}{R2}\right) V_{REF}$$

**SHUNT REGULATOR**

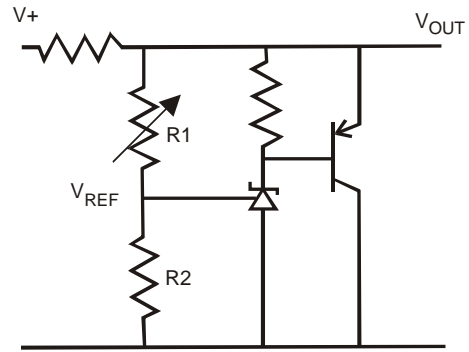

$$V_{OUT} = \left(1 + \frac{R1}{R2}\right) V_{REF}$$


**HIGHER CURRENT SHUNT REGULATOR**

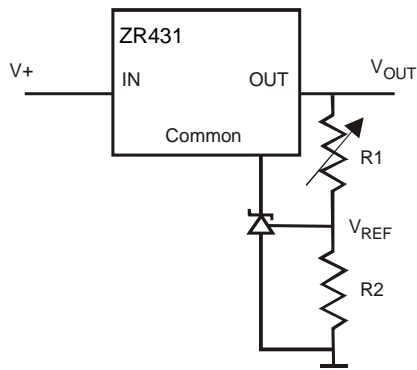

$$V_{OUT(MIN)} = V_{REF} + V_{REG}$$


$$V_{OUT} = \left(1 + \frac{R1}{R2}\right) V_{REF}$$

**OUTPUT CONTROL OF A THREE TERMINAL FIXED REGULATOR**

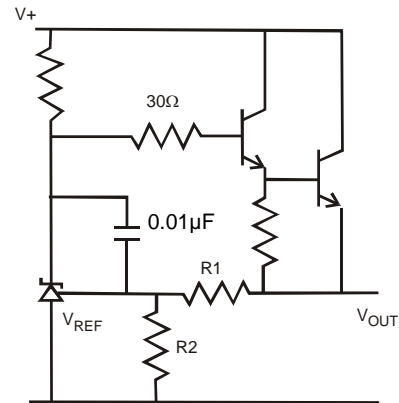


$$V_{OUT} = \left(1 + \frac{R1}{R2}\right) V_{REF}$$

**SERIES REGULATOR**

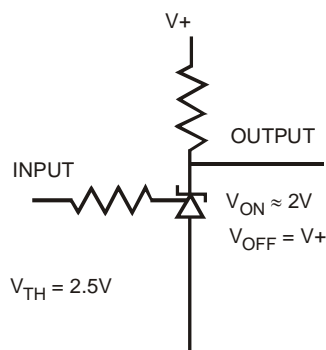

**SINGLE SUPPLY COMPARATOR WITH TEMPERATURE COMPENSATED THRESHOLD**

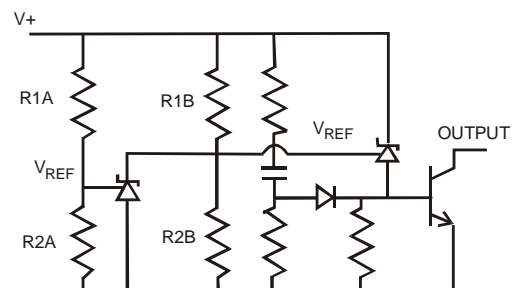


$$\text{Lowlimit} + \left(1 + \frac{R1B}{R2B}\right) V_{REF}$$

$$\text{Highlimit} + \left(1 + \frac{R1A}{R2A}\right) V_{REF}$$

**OVERVOLTAGE/UNDERVOLTAGE PROTECTION CIRCUIT**

## Ordering Information

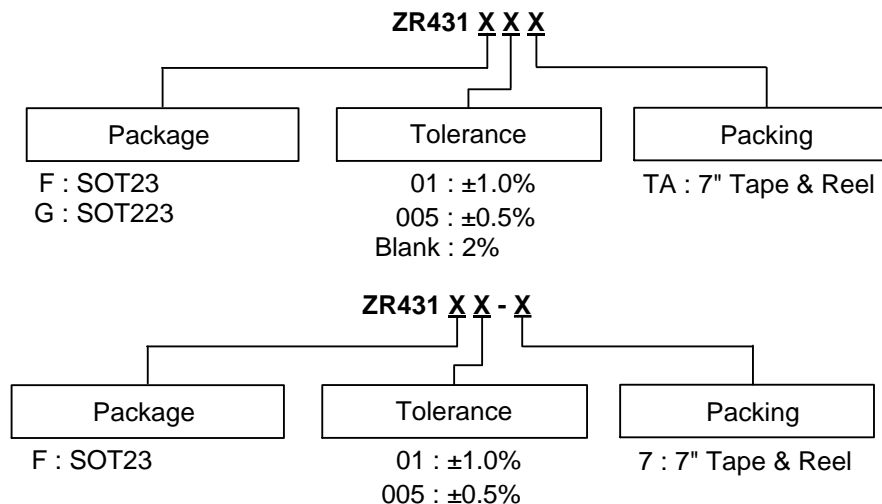


Part Number	Tolerance	Package Code	Identification Code	Package (Note 8)	Packing		Status (Note 9)
					Qty.	Carrier	
ZR431F005-7	0.5%	F	43R	SOT23	3000	7" Tape & Reel	EOL
ZR431F005TA	0.5%	F	43R	SOT23	3000	7" Tape & Reel	In Production
ZR431F01-7	1%	F	43B	SOT23	3000	7" Tape & Reel	EOL
ZR431F01TA	1%	F	43B	SOT23	3000	7" Tape & Reel	In Production
ZR431FTA	2%	F	43A	SOT23	3000	7" Tape & Reel	In Production
ZR431GTA	2%	G	ZR431	SOT223	1000	7" Tape & Reel	EOL

Notes: 8. For packaging details, go to our website at: <https://www.diodes.com/design/support/packaging/diodes-packaging/>.  
9. ZR431F005-7, ZR431F01-7 and ZR431GTA are End of Life (EOL). Please [contact us](#).


## Marking Information

### (1) SOT23



Part Number	Identification Code
ZR431F005-7	43R
ZR431F005TA	43R
ZR431F01-7	43B
ZR431F01TA	43B
ZR431FTA	43A

### (2) SOT223




Part Number	Identification Code
ZR431GTA	ZR431

## Package Outline Dimensions


Please see <http://www.diodes.com/package-outlines.html> for latest version.

### (1) Package Type: SOT23

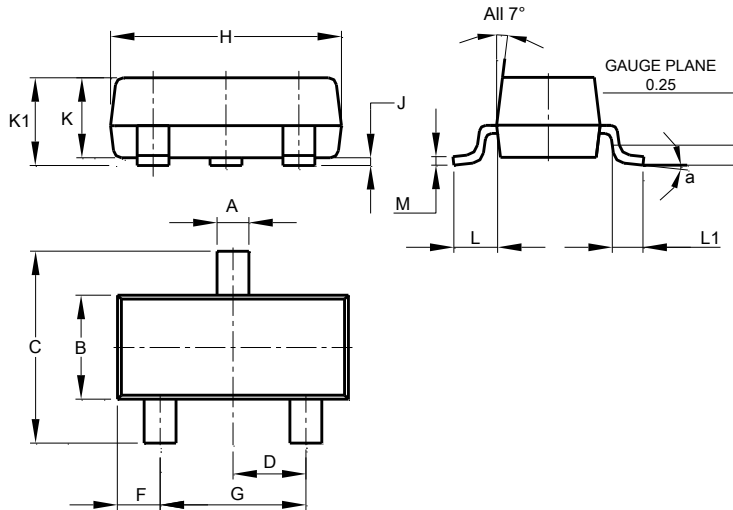

SOT23			
Dim	Min	Max	Typ
A	0.37	0.51	0.40
B	1.20	1.40	1.30
C	2.30	2.50	2.40
D	0.89	1.03	0.915
F	0.45	0.60	0.535
G	1.78	2.05	1.83
H	2.80	3.00	2.90
J	0.013	0.10	0.05
K	0.890	1.00	0.975
K1	0.903	1.10	1.025
L	0.45	0.61	0.55
L1	0.25	0.55	0.40
M	0.085	0.150	0.110
a	0°	8°	--
All Dimensions in mm			

### (2) Package Type: SOT223

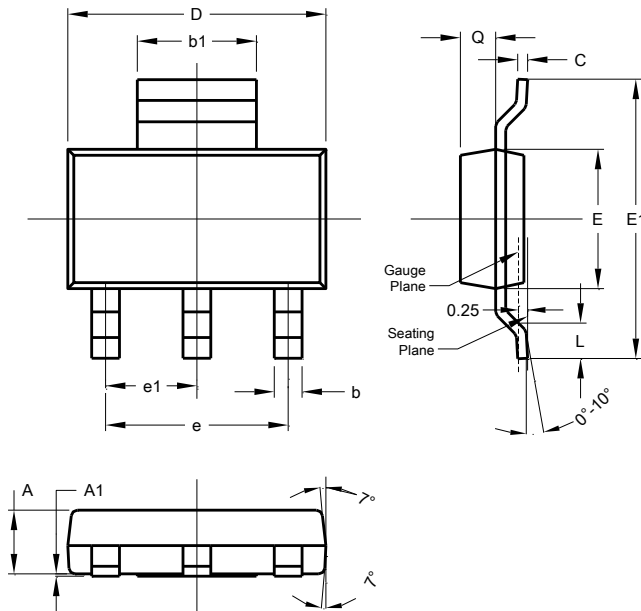


SOT223			
Dim	Min	Max	Typ
A	1.55	1.65	1.60
A1	0.010	0.15	0.05
b	0.60	0.80	0.70
b1	2.90	3.10	3.00
C	0.20	0.30	0.25
D	6.45	6.55	6.50
E	3.45	3.55	3.50
E1	6.90	7.10	7.00
e	-	-	4.60
e1	-	-	2.30
L	0.85	1.05	0.95
Q	0.84	0.94	0.89
All Dimensions in mm			

## Suggested Pad Layout


Please see <http://www.diodes.com/package-outlines.html> for latest version.

### (1) Package Type: SOT23

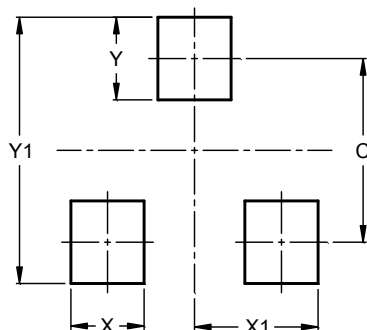

Dimensions	Value (in mm)
C	2.0
X	0.8
X1	1.35
Y	0.9
Y1	2.9

### (2) Package Type: SOT223

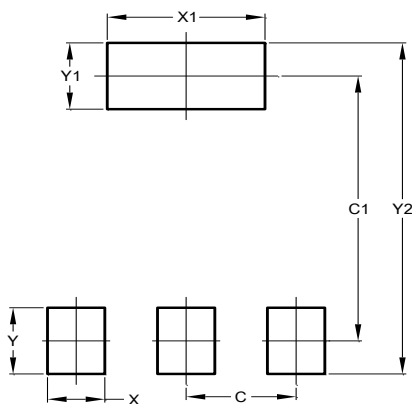

Dimensions	Value (in mm)
C	2.30
C1	6.40
X	1.20
X1	3.30
Y	1.60
Y1	1.60
Y2	8.00

## Mechanical Data

- Moisture Sensitivity:
  - SOT23: Level 1 per J-STD-020
  - SOT223: Level 3 per J-STD-020
- Terminals: Finish — Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 (E3)
- Weight:
  - SOT23: 0.009 grams (Approximate)
  - SOT223: 0.112 grams (Approximate)

**IMPORTANT NOTICE**

1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
9. This Notice may be periodically updated with the most recent version available at <https://www.diodes.com/about/company/terms-and-conditions/important-notice>

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries.  
All other trademarks are the property of their respective owners.  
© 2024 Diodes Incorporated. All Rights Reserved.

[www.diodes.com](https://www.diodes.com)