


Series
MMC

Twinax socket contact for
twisted paire cable (AWG 24)


Issue:
Feb. 24, 2014

Page
1/1


Composition :

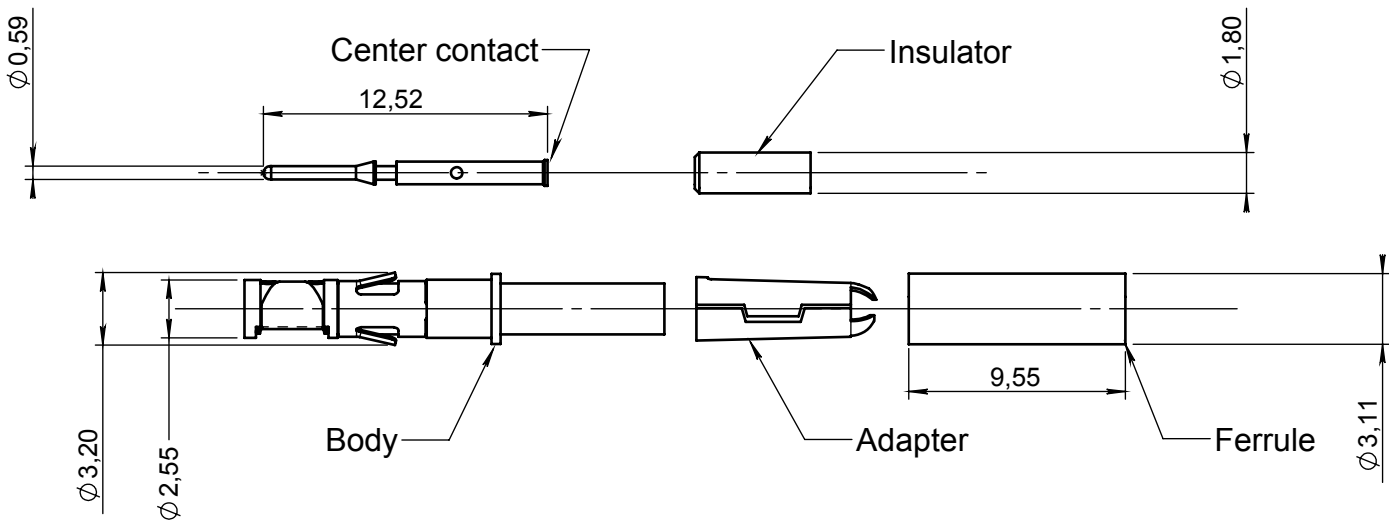

Cable stripping :

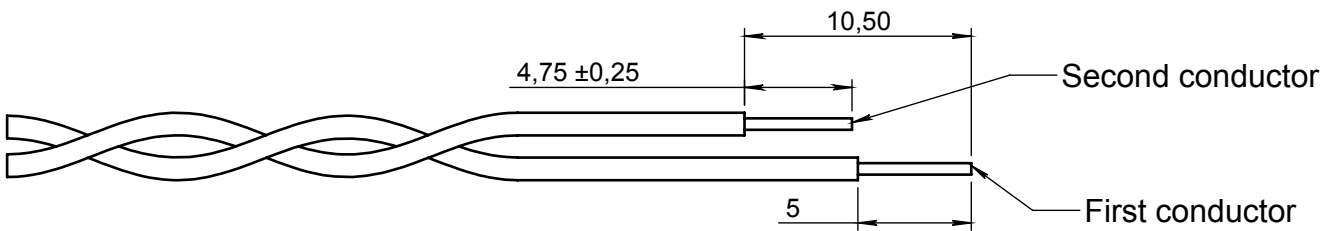


Assembly :

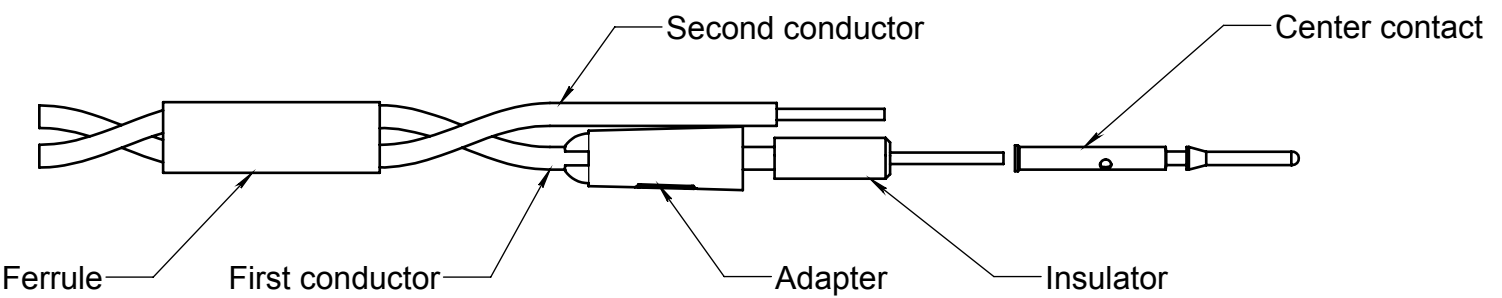

Crimp center contact on first conductor
Crimping tool : RADIALL 282 281
Posotioner : RADIALL 282 981 - Selector position 2
Insert the center contact in body up to ratchet mechanism
Slide the adapter on body
Insert the second conductor in the adapter slot
Slide the ferrule on adapter
Crimp the ferrule
Cromping tool : RADIALL 282 292
Positioner : RADIALL 282 973
Extraction tool : RADIALL 282 920

DIMENSIONS : mm (inch are given for information only)



CREATION

PEN:

NOM: Arnault

DATE: 25/07/94

APPR.:

Feb. 24, 2014

Document revised on new support

MARGOTTIN

Jul. 25, 1994

Document creation

ARNAULT

/

Issue

Revisions

Name

Approved

690070EN

RADIALL PROPRIETARY INFORMATION

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311