


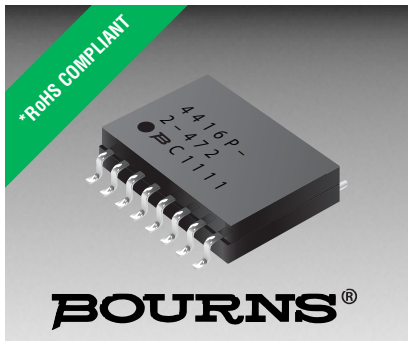

## Features

- RoHS compliant\*
- Standard E.I.A. package compatible with automatic placement equipment
- Compliant leads to reduce solder joint fatiguing
- Tape and reel packaging standard

- Standard electrical schematics: isolated, bussed, dual terminator
- Custom circuits are available
- Now available with improved tolerance to  $\pm 0.5\%$

## 4400P Series - Thick Film Surface Mounted Wide Body

### Product Characteristics

Resistance Range  
..... 10 ohms to 2.2 megohms  
Maximum Operating Voltage ..... 50 V  
Temperature Coefficient of Resistance  
50  $\Omega$  and above .....  $\pm 100$  ppm/ $^{\circ}\text{C}$   
below 50  $\Omega$  .....  $\pm 250$  ppm/ $^{\circ}\text{C}$   
TCR Tracking ..... 50 ppm/ $^{\circ}\text{C}$   
maximum; equal values  
Operating Temperature  
.....  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$   
Insulation Resistance  
..... 10,000 megohms minimum  
Dielectric Withstanding Voltage  
..... 200 VRMS  
Lead Solderability ..... Meet requirements  
of MIL-STD-202 Method 208

### Environmental Characteristics

TESTS PER MIL-STD-202 .....  $\Delta R$  MAX.  
Short Time Overload .....  $\pm 0.25\%$   
Load Life .....  $\pm 1.00\%$   
Moisture Resistance .....  $\pm 0.50\%$   
Resistance to Soldering Heat .....  $\pm 0.25\%$   
Thermal Shock .....  $\pm 0.25\%$

### Physical Characteristics

Flammability ..... Conforms to UL94V-0  
Lead Frame Material  
..... Copper, solder coated  
Body Material ..... Novolac epoxy

### How To Order

**44 20 P - 1 - 103 LF**

Model \_\_\_\_\_  
(44 = SMD SOL Pkg.)

Number of Pins \_\_\_\_\_

Electrical Configuration \_\_\_\_\_  
• 1 or 4 = Isolated\*  
• 2 = Bussed\*  
• 3 = Dual Terminator\*


Resistance Code \_\_\_\_\_  
• First 2 digits are significant  
• Third digit represents the number of zeros to follow.

Resistance Tolerance \_\_\_\_\_  
• Blank =  $\pm 2\%$  (see "Resistance Tolerance" on next page for resistance range)  
• F =  $\pm 1\%$  (100 ohms - 1 megohm)  
• D =  $\pm 0.5\%$  (100 ohms - 1 megohm)

Terminations \_\_\_\_\_  
• All electrical configurations EXCEPT T03:  
LF = Tin-plated (RoHS compliant)  
• ONLY electrical configuration T03:  
L = Tin-plated (RoHS compliant)

\*For tube packaging, use T01, T02, T03 or T04.  
Consult factory for other available options.


### Package Power Temp. Derating Curve

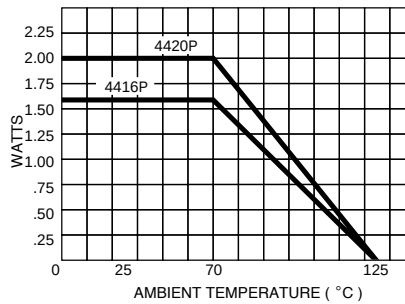

### Package Power Rating at 70 °C

4420P ..... 2.00 watts  
4416P ..... 1.60 watts


### Recommended Land Pattern

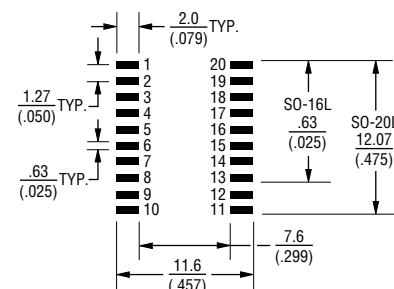

NOTE: Land pattern dimensions are based on design rules established by the Institute for Interconnecting and Packaging Electronic Circuits in IPC-SM-782.

For Standard Values Used in Capacitors, Inductors, and Resistors, [click here](#).

### Product Dimensions

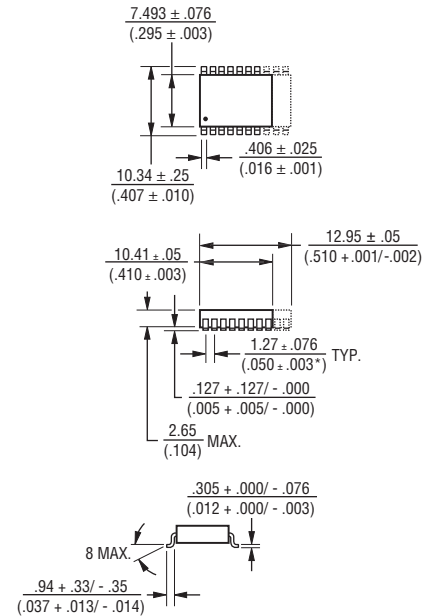


Governing dimensions are in metric. Dimensions in parentheses are inches and are approximate.

\*Terminal centerline to centerline measurements made at point of emergence of the lead from the body.

### Typical Part Marking

Represents total content. Layout may vary.

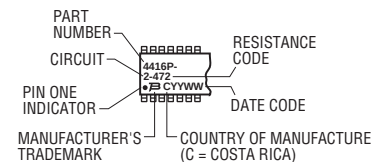

**WARNING**  
**Cancer and Reproductive Harm**  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

\*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

For information on specific applications,  
download Bourns' application notes:

- [DRAM Applications](#)
- [Dual Terminator Resistor Networks](#)
- [R/2R Ladder Networks](#)
- [SCSI Applications](#)


## 4400P Series - Thick Film Surface Mounted Wide Body

**BOURNS®**

### Isolated Resistors (1 and 4 Circuits)


**Model 4416P-1**

**Model 4420P-1 (Shown)**

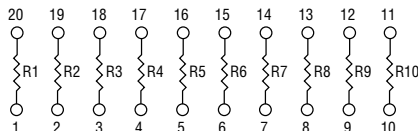

**Model 4416P-4**

**Model 4420P-4 (Shown)**

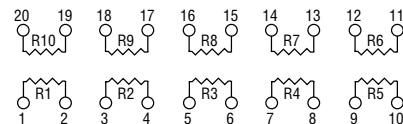


#### Resistance Tolerance

10 ohms to 49 ohms .....  $\pm 1$  ohm  
50 ohms to 2.2 megohms .....  $\pm 2$  %\*

#### Power Rating per Resistor

1 Circuit at 70 °C ..... 0.160 watt  
4 Circuit at 70 °C ..... 0.160 watt


#### Resistor Power Temp. Derating Curve

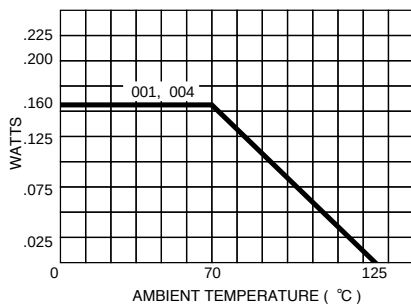

### Bussed Resistors (2 Circuit)

**Model 4416P-2**

**Model 4420P-2 (Shown)**

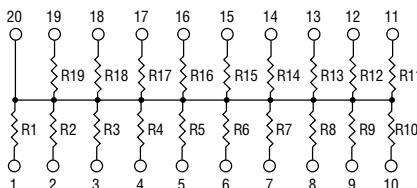


#### Resistance Tolerance

10 ohms to 49 ohms .....  $\pm 1$  ohm  
50 ohms to 2.2 megohms .....  $\pm 2$  %\*

#### Power Rating per Resistor

2 Circuit at 70 °C ..... 0.160 watt


#### Resistor Power Temp. Derating Curve

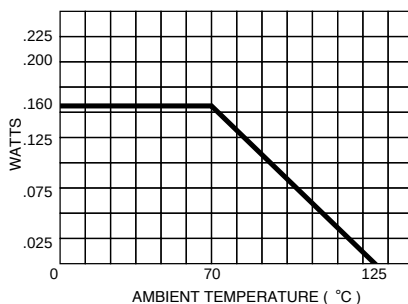

### Dual Terminator (3 Circuit)

**Model 4416P-3**

**Model 4420P-3 (Shown)**

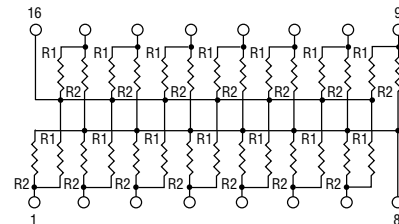

4420P-3 terminates 16 lines,  
convenient for a 16-bit computer bus.


#### Resistance Tolerance

Below 100 ohms .....  $\pm 2$  ohms  
100 ohms to 2.2 megohms .....  $\pm 2$  %\*

#### Power Rating per Resistor

3 Circuit at 70 °C ..... 0.115 watt

#### Resistor Power Temp. Derating Curve

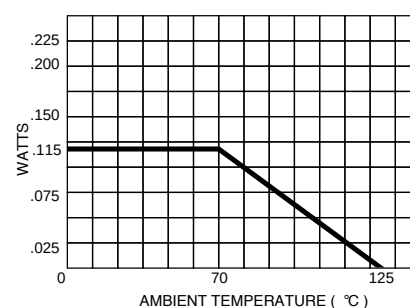

### Popular Resistance Values (1, 4 and 2 Circuits)\*\*

| Ohms | Code | Ohms  | Code | Ohms   | Code | Ohms    | Code | Ohms      | Code |
|------|------|-------|------|--------|------|---------|------|-----------|------|
| 10   | 100  | 180   | 181  | 1,800  | 182  | 15,000  | 153  | 120,000   | 124  |
| 22   | 220  | 220   | 221  | 2,000  | 202  | 18,000  | 183  | 150,000   | 154  |
| 27   | 270  | 270   | 271  | 2,200  | 222  | 20,000  | 203  | 180,000   | 184  |
| 33   | 330  | 330   | 331  | 2,700  | 272  | 22,000  | 223  | 220,000   | 224  |
| 39   | 390  | 390   | 391  | 3,300  | 332  | 27,000  | 273  | 270,000   | 274  |
| 47   | 470  | 470   | 471  | 3,900  | 392  | 33,000  | 333  | 330,000   | 334  |
| 56   | 560  | 560   | 561  | 4,700  | 472  | 39,000  | 393  | 390,000   | 394  |
| 68   | 680  | 680   | 681  | 5,600  | 562  | 47,000  | 473  | 470,000   | 474  |
| 82   | 820  | 820   | 821  | 6,800  | 682  | 56,000  | 563  | 560,000   | 564  |
| 100  | 101  | 1,000 | 102  | 8,200  | 822  | 68,000  | 683  | 680,000   | 684  |
| 120  | 121  | 1,200 | 122  | 10,000 | 103  | 82,000  | 823  | 820,000   | 824  |
| 150  | 151  | 1,500 | 152  | 12,000 | 123  | 100,000 | 104  | 1,000,000 | 105  |

\* Add "F" after resistance code for  $\pm 1$  % tolerance available from 100  $\Omega$  through 1M  $\Omega$ , or add "D" after resistance code for  $\pm 0.5$  % tolerance available from 100  $\Omega$  through 1M  $\Omega$ .

Part number suffix examples: -103 = 10K  $\Omega$ ,  $\pm 2$  %; -103F = 10K  $\Omega$ ,  $\pm 1$  %; -103D = 10K  $\Omega$ ,  $\pm 0.5$  %

\*\* Non-standard values available, within resistance range.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.


The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

# Surface Mounted Ordering Guide

**BOURNS®**

| Electrical Configuration | *Circuit Codes |       | Examples                                |
|--------------------------|----------------|-------|-----------------------------------------|
|                          | Tape & Reel    | Tubes |                                         |
| Isolated                 | 1              | T01   | 4416P-1-101                             |
| Bussed                   | 2              | T02   | Isolated Circuit in Tape & Reel Package |
| Dual Terminated          | 3              | T03   | 4416P-T01-101                           |
| Adj. Isolated            | 4              | T04   | Isolated Circuit in Slide Tube Package  |

\*4416P-X-RC: To specify package type, replace "X" with appropriate "Circuit Code".

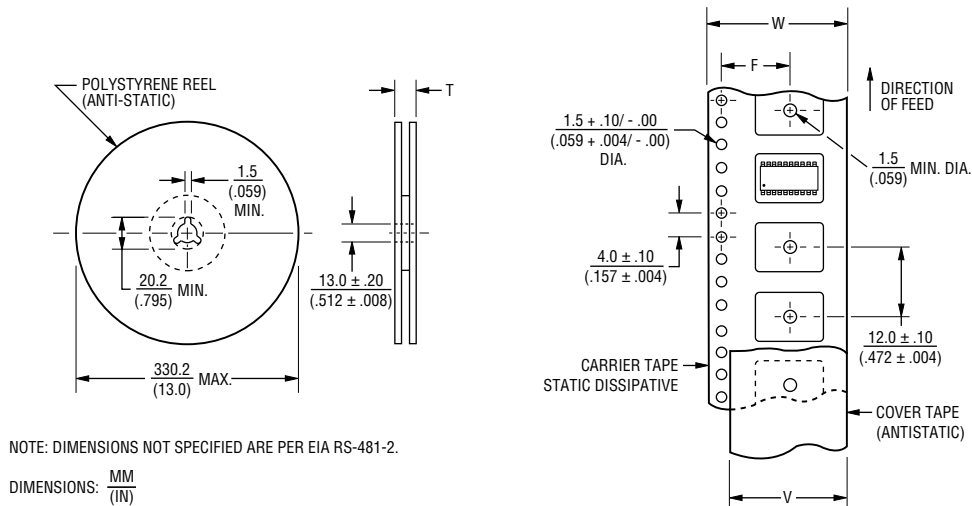

| Model | Standard Quantity per Reel | Carrier Tape Width (W)                 | Cover Tape Width (W)       | Reel Width (T)              | Pocket Center (F)                      |
|-------|----------------------------|----------------------------------------|----------------------------|-----------------------------|----------------------------------------|
| 4416P | 1,500                      | $\frac{24.0 \pm .30}{(.945 \pm .012)}$ | $\frac{21.0}{(.827)}$ NOM. | $\frac{30.4}{(1.197)}$ MAX. | $\frac{11.5 \pm .10}{(.453 \pm .004)}$ |
| 4420P | 1,500                      |                                        |                            |                             |                                        |

Leader Length = 500 mm min. } Empty Component Pockets  
 Trailer Length = 500 mm min. } Sealed with Cover Tape

**BOURNS®**

Asia-Pacific: Tel: +886-2 2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 885 877 • Email: eurocus@bourns.com

The Americas: Tel: +1-951 781-5500 • Email: americus@bourns.com

[www.bourns.com](http://www.bourns.com)

REV. 09/19

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain "typical" applications are based on Bourns' knowledge of typical requirements in generic applications. Bourns assumes that "typical" applications include failsafe/backup features to address critical risks to users and are designed to allow rework of Bourns® product to avoid scrap of a device solely due to malfunctioning Bourns® product. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Thus, users should always verify the actual performance of the Bourns® product in their specific devices and applications and make their own independent judgments regarding the suitability of Bourns® product and the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real-world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., IATF 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification even if such industry standard or qualification is a "state of art". Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage, such as without limitation nuclear, life-critical medical and certain automotive and aviation applications. Except as set forth in the bullet points below or unless expressly and specifically approved in writing on a case-by-case basis by an authorized Bourns' representative, use of any Bourns® products in such unauthorized high-risk applications is at the user's sole risk.

- Bourns considers implantable/invasive devices and devices/procedures designed as life-supporting or life-sustaining by the U.S. Food and Drug Administration or equivalent organizations outside of the United States as "life-critical" medical applications. Bourns expressly identifies those Bourns® standard products that are suitable for use in typical medical applications that are not life-critical in its publication entitled "Bourns Medical Grade Component Guide."
- Bourns expressly identifies those Bourns® standard products that are suitable for use in typical automotive applications associated with any Automate Safety Integrity Level (ASIL) in its publication entitled "Bourns Automotive Grade Component Guide." Bourns' designation of Bourns® product as compliant with the AEC-Q standard does not by itself mean that Bourns has approved such product for use in an automotive application.
- Bourns expressly identifies Bourns® standard products that are suitable for use in the typical aviation applications/systems requiring System Design Assurance Level (RTCA DO-254 DAL) of C, D or E in its publication entitled "Bourns Civilian Aerospace/Aviation Grade Component Guide." Bourns does not test its products for compliance with United States Federal Aviation Administration standards or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aviation applications. Use of Bourns® standard components in aviation applications associated with RTCA DO-254 DAL A or B without proper approval noted above shall be at the user's sole risk.
- Bourns will review and authorize on a case-by-case basis the use of Bourns® standard products which are at least AEC-Q compliant in space-related civil applications (rockets, satellites) with a negotiated cross-waiver and indemnity agreement.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Use of Bourns® products or Bourns' technology in military/defense applications must be reviewed with Bourns for compliance with applicable export control laws and embargoes. Users shall not sell, transfer, export or re-export (which includes transfers within a country) any Bourns® products or technology or technical data for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology or technical data in any facility which engages in activities relating to such devices. Further, Bourns® products and Bourns' technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products and technology may not, without prior authorization from Bourns and/or the Government of a country where such product/technology is designed and/or manufactured, be resold, transferred, or re-exported (including within the same country) to any party not eligible to receive commodities, software, and technical data originating in such country.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties (those not based on parameters specified in Bourns' data sheets and/or specifications), including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: <https://www.bourns.com/legal/disclaimers-terms-and-policies>

PDF: <https://www.bourns.com/docs/Legal/disclaimer.pdf>