

NET SHOP

3D CAD

Reference Drawings

PDF Catalog


Part number **SPVQ830802** **Water-proof Type SPVQ8 Series**

Automotive **Water-proof Type** **Dust-proof Type**

Standard [Print](#)

Basic information ▾ Dimensions ▾ Circuit Diagram ▾ Packing Specifications ▾ Soldering Conditions ▾

Basic information

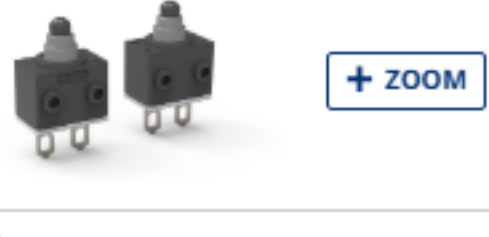

Poles	1
Positions	1
Terminal type	For Lead
Operating force	1±0.5N
Circuit	N/O
Main body form	Boss - both sides
Dimensions (W×D×H)	5.3×8.3×6.5mm

Specifications

Operating temperature range	-40°C to +85°C	
Rating(max.)/(min.)(Resistive load)	0.1A 16V DC/50μA 5V DC	
Electrical performance	Contact resistance(Initial/After operating life)	500mΩ max./3Ω max.
	Insulation resistance	100MΩ min. 500V DC
	Voltage proof	500V AC for 1 minute
Mechanical performance	Terminal strength	3N for 1 minute
	Actuator strength	20N
Durability	Operating life without load	1,000,000 cycles 3Ω max.
	Operating life with load Rating(max.) (Resistive load)	1,000,000 cycles 3Ω max.
Environmental performance	Cold	-40°C 500h
	Dry heat	85°C 500h
	Damp heat	60°C, 90 to 95%RH 500h
Minimum order unit(pcs.)	Japan	1,755
	Export	7,020

MEMBERS ONLY

[Save Item](#)

[Contact](#)

Dimensions

[Open an expandable image in a separate window](#)

Circuit Diagram

[Open an expandable image in a separate window](#)

Packing Specifications

Tray	
Number of packages (pcs.)	
1 case / Japan	1,755
1 case / export packing	7,020
Export package measurements (mm)	
540×360×270	

Soldering Conditions

Reference for Hand Soldering	
Soldering temperature	
300±10°C	
Soldering time	
3+1/0s	

Notes are common to this series/models

- This site catalog shows only outline specifications. When using the products, please obtain formal specifications for supply.
- Unless specified, the length of the lead wire is 250mm. Color is either red or black. For length modification, please contact us.
- Please specify circuits (N.O. or N.C.) for wired (side) types. Unless specified, the circuit will apply N.O.
- This unit cannot be used in water (IP6K7 rating, except for terminal).
- Please place purchase orders per minimum order unit (integer).
- This products can be used in vehicles. Although these products are designed to perform over a wide operating temperature range, please ensure that you receive and read the formal delivery specifications before use.

Cautions

- Applying load to terminals during soldering under certain conditions may cause deformation and electrical property degradation.
- Avoid use of water-soluble soldering flux, since it may corrode the switches.
- Check and conform to soldering requirements under actual mass production conditions.
- No washing.
- The products are designed and manufactured for direct current resistance. Contact us for use of other resistances such as inductive (L) or capacitive (C).
- The circuit setting (software setting) shall be ensured for error-free operations, caused by bounce and chattering as specified by each model of the switches.
- Do not use the switches for a long time near the upper or lower limits of the specified operating temperatures. The use environments shall satisfy the specified range of the environmental tests in the specifications.
- In case of continuous operation near the upper and lower limits, see requirements of each model to check if possible.
- The switches designed specifically for automotive uses can be used for vehicles. No other switches shall be used for vehicles.
- Use the switches sufficiently distant (i.e. at a position closer to the full distance) from the ON Start Position.
- The switch-returning force cannot be used as a mechanical driving force of a set.
- Do not apply transverse force to the operating part while piling up PC boards in process and during transportation.
- Protect small and thin switches from external forces in the set mounting process.
- Use of a through-hole PC board, or a PC board of different thickness from the recommendation will have a different heat stress. Verify the soldering requirements thoroughly before use.
- Warped PC boards may change their properties. Carefully design and lay-out the patterns.
- Use of thinner PC boards will require extra care, since the switches may be floated.
- Use of the switches in a dusty environment may lead the dusts entering through the openings and cause imperfect contact or malfunction. Take this into account for set design.
- Corrosive gas if generated by peripheral parts of a set, malfunction such as imperfect contact may occur. Thorough investigation shall be required beforehand.
- Storage
Store the products as delivered at normal temperature and humidity, out of direct sunlight and away from corrosive gases. Use them as soon as possible and no later than six months after delivery.
Once the seal is broken, use them as soon as possible.

Measurement and Test Methods

Rotational Torque (Operating Force)
Measures the torque of operating force, the necessary to rotate (move) the shaft (lever). Unless otherwise specified, measurement shall be made at ambient temperatures of 5 to 35°C, the shaft rotational speed shall be 60° per second, and the lever traveling speed shall be 20mm per second.

Shaft Wobble
Measures the amount of deflection at the specified position from the reference plane, with the specified bending moment, applied perpendicularly to the shaft from directions 180 degrees with respect to each other.

Withstand Voltage
Applies AC voltage to the specified spot for a minute and then checks for arc, burning, dielectric breakdown and other abnormalities. Respective terminals may be tested as a group. The sections described below shall be tested unless otherwise specified. However, if the section concerned is so constructed as to conduct, that particular part shall not be tested.

Insulation Resistance
Applies specified voltage to the specified locations and then measures the insulation resistance with a megger. The locations described below shall be tested unless otherwise specified. However, if the section concerned is so constructed as to conduct, that particular part shall not be tested.

Sections to be Tested for Withstand Voltage and Insulation Resistance

- Between terminal and shaft (lever).
- Between terminal and metal cover (frame).

Shaft (Lever) Strength against Push/Pull Actions
Applies a specified force in the axial direction of the shaft (lever) for 19 seconds and then checks the operating part and other sections for deformation, breakage, operating conditions, etc.

[Inquiries about Products](#)

Category List

Sensors	Semiconductors	TACT Switch™
Switches	Encoders	Potentiometers
Connectors →	Wireless Communication Devices	Multi Control Devices
Aspherical Glass Lenses	Actuators →	haptic reactor →
Capacitive Sensing Modules →		

[Site map](#) [Terms of Use \(use of cookies & consent settings\)](#) [Social Media Policy](#) [Global Privacy Policy](#) [About the trademarks](#)

ALPSALPINE
extends your senses

© 2025 ALPS ALPINE CO., LTD.