


# High Voltage Power MOSFET

## IXTY02N50D IXTU02N50D IXTP02N50D


 $V_{DSX} = 500V$   $I_{D25} = 200mA$ 

 $R_{DS(on)} \leq 30\Omega$ 


#### **N-Channel**




TO-252 (IXTY)



### TO-251 (IXTU)



#### TO-220AB (IXTP)



G = Gate	D	= Drain
S = Source	Tab	= Drain

## Features


- Normally ON Mode
- International Standard Packages
- Low  $R_{DS(on)}$  HDMOS<sup>TM</sup> Process
- Rugged Polysilicon Gate Cell Structure
- · Fast Switching Speed

## **Advantages**

- · Easy to Mount
- Space Savings
- High Power Density

#### **Applications**

- · Level Shifting
- Triggers
- · Solid State Relays
- Current Regulators

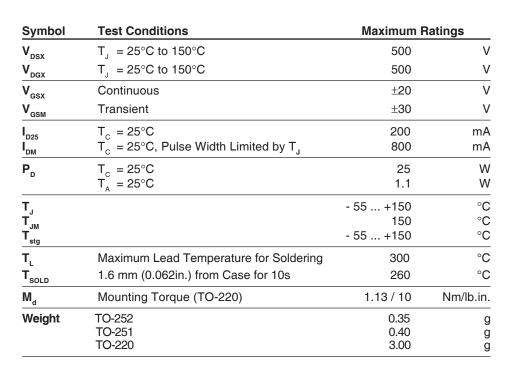

<b>Symbol</b> (T <sub>J</sub> = 25°C,	<b>Test Conditions</b> Unless Otherwise Specified)		Charac Min.	teristic Typ.	Values Max	
BV <sub>DSX</sub>	$V_{GS} = -10V, I_{D} = 25\mu A$		500			V
V <sub>GS(off)</sub>	$V_{DS} = 25V, I_{D} = 25\mu A$		- 2.5		- 5.0	V
I <sub>GSX</sub>	$V_{GS} = \pm 20V, V_{DS} = 0V$				±100	nA
DSX(off)	$V_{DS} = V_{DSX}, V_{GS} = -10V$	T <sub>J</sub> = 125°C				μ <b>Α</b> μ <b>Α</b>
R <sub>DS(on)</sub>	$V_{GS} = 0V$ , $I_{D} = 50$ mA, Note 1			20	30	Ω
I <sub>D(on)</sub>	$V_{GS} = 0V, V_{DS} = 25V, Note 1$			250		mA



SymbolTest ConditionsChar $(T_J = 25^{\circ}C, Unless Otherwise Specified)$ Min.		acteristic Typ.	Values Max.	
g <sub>fs</sub>	$V_{DS} = 50V, I_{D} = 200mA, Note 1$	100	150	mS
C <sub>iss</sub>			120	pF
C <sub>oss</sub>	$V_{GS} = -10V, V_{DS} = 25V, f = 1MHz$		25	pF
C <sub>rss</sub>			5	pF
t <sub>d(on)</sub>	Resistive Switching Times		9	ns
t,	$V_{GS} = \pm 5V, V_{DS} = 100V, I_{D} = 50 \text{mA}$		4	ns
t <sub>d(off)</sub>	$R_{\rm g} = 30\Omega$ (External)		28	ns
<u>t,</u> <i>J</i>	$H_{\rm G} = 30\Omega$ (External)		45	ns
R <sub>thJC</sub>				5.0 °C/W
R <sub>thCS</sub>	TO-220		0.50	°C/W


#### Source-Drain Diode

Symbol	Test Conditions	<b>Characteristic Values</b>			
$(T_J = 25^{\circ}C)$	, Unless Otherwise Specified)	Min.	Тур.	Max.	
V <sub>SD</sub>	$I_F = 200 \text{mA}, V_{GS} = -10 \text{V}, \text{ Note 1}$		0.7	1.5	V
t <sub>rr</sub>	$I_F = 750 \text{mA}, -\text{di/dt} = 100 \text{A/}\mu\text{s}$			1.0	μs
	$V_{R} = 25V, V_{GS} = -10V$				

Note 1. Pulse test,  $t \le 300\mu s$ , duty cycle,  $d \le 2\%$ .


IXYS Reserves the Right to Change Limits, Test Conditions,  $\$ and  $\$ Dimensions.

## TO-252 AA (IXTY) Outline



MYZ	INCHES		MILLIMETERS	
21M	MIN	MAX	MIN	MAX
Α	.086	.094	2.19	2.38
A1	0	.005	0	0.12
A2	.038	.046	0.97	1.17
b	.025	.035	0.64	0.89
ь2	.030	.045	0.76	1.14
b3	.200	.215	5.08	5.46
С	.018	.024	0.46	0.61
c2	.018	.023	0.46	0.58
D	.235	.245	5.97	6.22
D1	.180	.205	4.57	5,21
E	.250	.265	6.35	6.73
E1	.170	.205	4.32	5.21
е	.090	BSC	2.28 B2C	
e1	.180	BSC	4.57 BSC	
Н	.370	.410	9.40	10.42
L	.055	.070	1.40	1.78
L1	.100	.115	2.54	2.92
L2	.020 BSC		0.50 BSC	
L3	.025	.040	0.64	1.02
L4	.025	.040	0.64	1.02
θ	0°	10°	0°	10°


## TO-251 AA (IXTU) Outline



1. Gate; 2,4. Drain; 3. Source

SYM	INCHES		MILLIMETERS	
2114	MIN	MAX	MIN	MAX
Α	.087	.094	2.20	2.40
A1	.032	.048	0.82	1.22
b	.026	.034	0.66	0.86
(b2)	.030	.038	0.76	0.96
b4	.198	.222	5.04	5.64
С	.018	.024	0.45	0.60
c2	.016	.024	0.40	0.60
D	.232	.248	5.90	6.30
(D1)	.179	.195	4.55	4.95
Ε	.252	.268	6.40	6.80
(E1)	.191	.207	4.85	5,25
е	.090 BSC		2.28 BSC	
e1	.180 BSC		4.57 BSC	
L	.358	.374	9.10	9,50
L1	.063	.079	1.60	2.00
L2	.020	.035	0.50	0.90

## TO-220 (IXTP) Outline



1. Gate; 2,4. Drain; 3. Source

MY2	INCHES		MILLIMETERS	
2114	MIN	MAX	MIN	MAX
Α	.169	.185	4.30	4.70
A1	.047	.055	1.20	1.40
A2	.079	.106	2.00	2.70
b	.024	.039	0.60	1.00
b2	.045	.057	1.15	1.45
С	.014	.026	0.35	0.65
D	.587	.626	14.90	15.90
D1	.335	.370	8.50	9.40
(D2)	.500	.531	12.70	13.50
Ε	.382	.406	9.70	10.30
(E1)	.283	.323	7.20	8.20
е	.100 BSC		2.54 BSC	
e1	.200 BSC		5.08 BSC	
H1	.244	.268	6.20	6.80
L	.492	.547	12.50	13.90
L1	.110	.154	2.80	3.90
ØΡ	.134	.150	3.40	3.80
Q	.106	.126	2.70	3.20



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.