ON Semiconductor

Is Now



To learn more about onsemi™, please visit our website at
www.onsemi.com

onsemi and onsemi and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi** product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.

Downloaded from Arrow.com.

ON Semiconductor®

FXLA102
Low-Voltage Dual-Supply 2-Bit Voltage Translator with Configurable Voltage Supplies and Signal Levels, 3-State Outputs, and Auto Direction Sensing

Features

- Bi-Directional Interface between Two Levels: from 1.1 V to 3. 6V
- Fully Configurable: Inputs and Outputs Track V_{CC} Level
- Non-Preferential Power-Up; Either V_{CC} May Be Powered Up First
- Outputs Switch to 3-State if Either V_{CC} is at GND
- Power-Off Protection
- Bus-Hold on Data Inputs Eliminates the Need for Pull-Up Resistors; Do Not Use Pull-Up Resistors on A or B Ports
- Control Input (/OE) Referenced to V_{CCA} Voltage
- Packaged in MicroPak™ 8 (1.6 mm x 1.6 mm)
- Direction Control Not Necessary
- 100 Mbps Throughput when Translating Between 1.8 V and 2.5 V
- ESD Protection Exceeds:
  - 15 kV HBM ((B Port I/O to GND) per JESD22-A114 & Mil Std 883e 3015.7)
  - 8 kV HBM ((A Port I/O to GND) per JESD22-A114 & Mil Std 883e 3015.7)
  - 2 kV CDM (per ESD STM 5.3)

Description

The FXLA102 is a configurable dual-voltage supply translator for both uni-directional and bi-directional voltage translation between two logic levels. The device allows translation between voltages as high as 3.6 V to as low as 1.1 V. The A port tracks the V_{CCA} level and the B port tracks the V_{CCB} level. This allows for bi-directional voltage translation over a variety of voltage levels: 1.2 V, 1.5 V, 1.8 V, 2.5 V, and 3.3 V.

The device remains in three-state as long as either V_{CC}=0 V, allowing either V_{CC} to be powered up first. Internal power-down control circuits place the device in 3-state if either V_{CC} is removed.

The /OE input, when HIGH, disables both the A and B ports by placing them in a 3-state condition. The /OE input is supplied by V_{CCA}.

The FXLA102 supports bi-directional translation without the need for a direction control pin. The two ports of the device have auto-direction sense capability. Either port may sense an input signal and transfer it as an output signal to the other port.

Ordering Information

Part Number	Top Mark	Operating Temperature Range	Package	Packing Method
FXLA102L8X	XF	-40 to 85°C	8-Lead MicroPak™ 1.6 mm x 1.6 mm Package	5 K Units Tape and Reel

© 2009 Semiconductor Components Industries, LLC.
October-2017, Rev. 2

Publication Order Number:
FXLA102/D

Downloaded from Arrow.com.

Pin Configuration

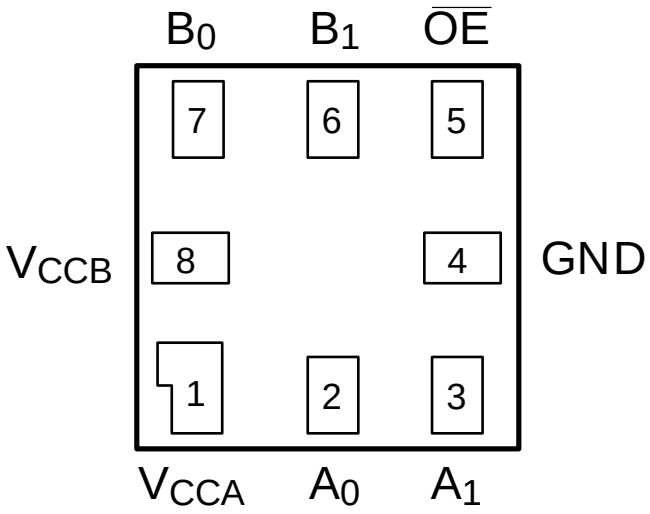


Figure 1. Pin Configuration (Top Through View)

Pin Definitions

Pin #	Name	Description
1	V_{CCA}	A-Side Power Supply
2	A_0	A Side Input or 3-State Output
3	A_1	A Side Input or 3-State Output
4	GND	Ground
5	/OE	Output Enable Input
6	B_1	B Side Input or 3-State Output
7	B_0	B Side Input or 3-State Output
8	V_{CCB}	B Side Power Supply

Downloaded from Arrow.com.

Functional Diagram

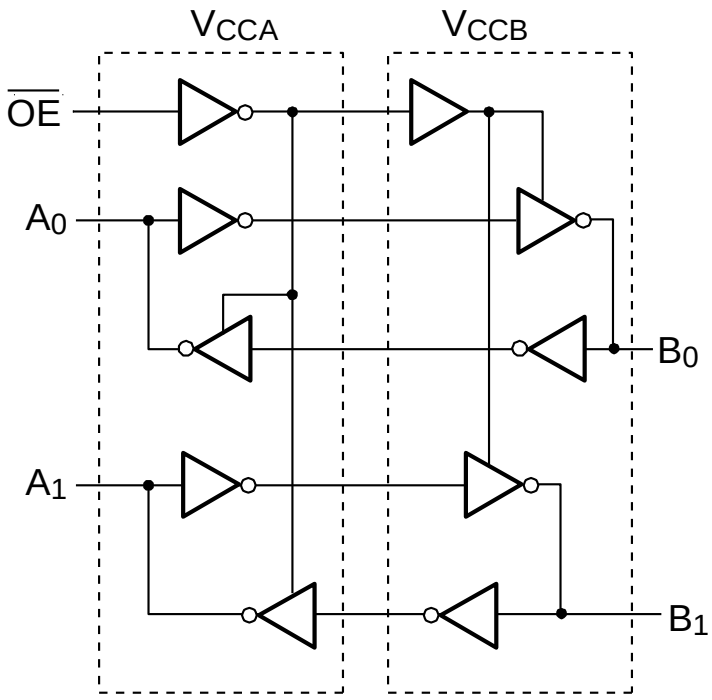


Figure 2. Functional Diagram

Function Table

Control	Outputs
/OE	
L	Normal Operation
H	3-State

H = HIGH Logic Level

L = LOW Logic Level

Downloaded from Arrow.com.

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Conditions	Min.	Max.	Unit
V_{CC}	Supply Voltage	V_{CCA}	-0.5	4.6	V
		V_{CCB}	-0.5	4.6	
V_I	DC Input Voltage	I/O Ports A and B	-0.5	4.6	V
		Control Input (/OE)	-0.5	4.6	
V_O	Output Voltage[2]	Output 3-State	-0.5	4.6	V
		Output Active (A_n)	-0.5	V_{CCA} +0.5	
		Output Active (B_n)	-0.5	V_{CCB} +0.5	
I_{IK}	DC Input Diode Current	V_I<0V		-50	mA
I_{OK}	DC Output Diode Current	V_O<0V		-50	mA
		V_O>V_{CC}		+50	
I_{OH}/I_{OL}	DC Output Source/Sink Current		-50	+50	mA
I_{CC}	DC V_{CC} or Ground Current (per Supply Pin)			±100	mA
T_{STG}	Storage Temperature Range		-65	+150	°C
P_D	Power Dissipation			5	mW
ESD	Human Body Model, JESD22-A114	B Port I/O to GND		15	kV
		A Port I/O to GND		8	
	Charged Device Model, JESD22-C101			2	

Notes:
1. I_O absolute maximum ratings must be observed.
2. All unused inputs and input/outputs must be held at V_{CCi} or GND.

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. ON Semiconductor does not recommend exceeding them or designing to Absolute Maximum Ratings.

Symbol	Parameter	Conditions	Min.	Max.	Unit
V_{CC}	Power Supply	Operating V_{CCA} or V_{CCB}	1.1	3.6	V
V_{IN}	Input Voltage	Ports A and B	0	3.6	V
		Control Input (/OE)	0	V_{CCA}	V
	Dynamic Output Current I_{OH}/I_{OL}	V_{CC} = 3.0 V to 3.6 V		±12	mA
		V_{CC} = 2.3 V to 2.7 V		±8	
		V_{CC} = 1.65 V to 1.95 V		±5	
		V_{CC} = 1.40 V to 1.65 V		±3	
		V_{CC} =1.1 V to 1.4 V		±2	
	Static Output Current	V_{CC} =1.1 V to 3.6 V		±4	µA
T_A	Operating Temperature, Free Air		-40	+85	°C
dt/dV	Maximum Input Edge Rate	$V_{CCA/B}$ = 1.1 to 3.6 V		10	ns/V
Θ_{JA}	Thermal Resistance			280	°C/W

Downloaded from Arrow.com.

Power-Up/Power-Down Sequence

FXL translators offer an advantage in that either V_{CC} may be powered up first. This benefit derives from the chip design. When either V_{CC} is at 0 V, outputs are in a high-impedance state. The control input (/OE) is designed to track the V_{CCA} supply. A pull-up resistor tying /OE to V_{CCA} should be used to ensure that bus contention, excessive currents, or oscillations do not occur during power-up or power-down. The size of the pull-up resistor is based upon the current-sinking capability of the device driving the /OE pin.

The recommended power-up sequence is:

1. Apply power to the first V_{CC}.
2. Apply power to the second V_{CC}.
3. Drive the /OE input LOW to enable the device.

The recommended power-down sequence is:

1. Drive /OE input HIGH to disable the device.
2. Remove power from either V_{CC}.
3. Remove power from other V_{CC}.

Pull-Up/Pull-Down Resistors

Do not use pull-up or pull-down resistors. This device has bus-hold circuits: pull-up or pull-down resistors are not recommended because they interfere with the output state. The current through these resistors may exceed the hold drive, $I_{I(HOLD)}$ and/or $I_{I(OD)}$ bus-hold currents. The bus-hold feature eliminates the need for extra resistors.

Downloaded from Arrow.com.

DC Electrical Characteristics

T_A=-40 to 85°C.

Symbol	Parameter	Conditions	V_{CCA} (V)	V_{CCB} (V)	Min.	Typ.	Max.	Units
V_{IHA}	High-Level Input Voltage	Data Inputs A_n Control Pin /OE	2.70 to 3.60	1.10 to 3.60	2.00			V
			2.30 to 2.70		1.60			
			1.65 to 2.30		.65xV_{CCA}			
			1.40 to 1.65		.65xV_{CCA}			
			1.10 to 1.40		.90xV_{CCA}			
V_{IHB}		Data Inputs B_n	1.10 to 3.60	2.70 to 3.60	2.00			V
				2.30 to 2.70	1.60			
				1.65 to 2.30	.65xV_{CCB}			
				1.40 to 1.65	.65xV_{CCB}			
				1.10 to 1.40	.90xV_{CCB}			
V_{ILA}	Low-Level Input Voltage	Data Inputs A_n Control Pin /OE	2.70 to 3.60	1.10 to 3.60			.80	V
			2.30 to 2.70				.70	
			1.65 to 2.30				.35xV_{CCA}	
			1.40 to 1.65				.35xV_{CCA}	
			1.10 to 1.40				.10xV_{CCA}	
V_{ILB}		Data Inputs B_n	1.10 to 3.60	2.70 to 3.60			.80	V
				2.30 to 2.70			.70	
				1.65 to 2.30			.35xV_{CCB}	
				1.40 to 1.65			.35xV_{CCB}	
				1.10 to 1.40			.10xV_{CCB}	
V_{OHA}	High-Level Output Voltage[3]	I_{OH}=-4 µA	1.10 to 3.60	1.10 to 3.60	V_{CCA} - .40			V
V_{OHB}		I_{OH}=-4µ A	1.10 to 3.60	1.10 to 3.60	V_{CCB} - .40			
V_{OLA}	Low-Level Output Voltage[3]	I_{OL}=4 µA	1.10 to 3.60	1.10 to 3.60			.4	V
V_{OLB}		I_{OL}=4 µA	1.10 to 3.60	1.10 to 3.60			.4	
$I_{I(HOLD)}$	Bus-Hold Input Minimum Drive Current	V_{IN}=0.80 V	3.00	3.00	75.0			µA
		V_{IN}=2.00 V	3.00	3.00	-75.0			
		V_{IN}=0.70 V	2.30	2.30	45.0			
		V_{IN}=1.60 V	2.30	2.30	-45.0			
		V_{IN}=0.57 V	1.65	1.65	25.0			
		V_{IN}=1.07 V	1.65	1.65	-25.0			
		V_{IN}=0.49 V	1.40	1.40	11.0			
		V_{IN}=0.91 V	1.40	1.40	-11.0			
		V_{IN}=0.11 V	1.10	1.10		4.0		
		V_{IN}=0.99 V	1.10	1.10		-4.0		

Continued on following page…

Downloaded from Arrow.com.

DC Electrical Characteristics (Continued)

T_A=-40 to 85°C.

Symbol	Parameter	Conditions	V_{CCA} (V)	V_{CCB} (V)	Min.	Max.	Units
$I_{I(ODH)}$	Bus-Hold Input Overdrive High Current(4)	Data Inputs A_n, B_n	3.60	3.60	450.00		µA
			2.70	2.70	300.00		
			1.95	1.95	200.00		
			1.60	1.60	120.00		
			1.40	1.40	80.00		
$I_{I(ODL)}$	Bus-Hold Input Overdrive Low Current(5)	Data Inputs A_n, B_n	3.60	3.60	-450.00		µA
			2.70	2.70	-300.00		
			1.95	1.95	-200.00		
			1.60	1.60	-120.00		
			1.40	1.40	-80.00		
I_I	Input Leakage Current	Control Inputs /OE, V_I=V_{CCA} or GND	1.10 to 3.60	3.60		±1.0	µA
I_{OFF}	Power-Off Leakage Current	A_n Port V_O=0V to 3.6 V	0	3.6		±2.0	µA
		B_n Port V_O=0V to 3.6 V	3.60	0		±2.0	
I_{OZ}	3-State Output Leakage	Data Outputs A_n, B_n V_O=0 V or 3.6 V, /OE=V_{IH}	3.60	3.60		±5.0	µA
		Data Outputs Data Outputs A_n V_O=0 V or 3.6 V, /OE=GND	3.60	0		±5.0	
		Data Outputs B_n V_O=0 V or 3.6 V, /OE=GND	0	3.60		±5.0	
$I_{CCA/B}$	Quiescent Supply Current(6, 7)	V_I=V_{CCI} or GND; I_O=0, /OE=GND	1.10 to 3.60	1.10 to 3.60		10.0	µA
I_{CCZ}		V_I=V_{CCI} or GND; I_O=0, /OE=V_{IH}	1.10 to 3.60	1.10 to 3.60		10.0	µA
I_{CCA}	Quiescent Supply Current	V_I=V_{CCB} or GND; I_O=0 B-to-A Direction, /OE=GND	0	1.10 to 3.60		-10.0	µA
			1.10 to 3.60	0		10.0	
I_{CCB}		V_I=V_{CCA} or GND; I_O=0, A-to-B Direction, /OE=GND	1.10 to 3.60	0		-10.0	µA
			0	1.10 to 3.60		10.0	

Notes:

3. This is the output voltage for static conditions. Dynamic drive specifications are given in the Dynamic Output Electrical Characteristics table.
4. An external drive must source at least the specified current to switch LOW-to-HIGH.
5. An external drive must source at least the specified current to switch HIGH-to-LOW.
6. V_{CCI} is the V_{CC} associated with the input side.
7. Reflects current per supply, V_{CCA} or V_{CCB}.

Downloaded from Arrow.com.

Dynamic Output Electrical Characteristic

A Port (A_n)

Output Load: C_L=15 pF, $R_L \geq M\Omega$ ($C_{I/O}$=4 pF), T_A=-40 to 85°C

Symbol	Parameter	V_{CCA}=3.0 V to 3.6 V		V_{CCA}=2.3 V to 2.7 V		V_{CCA}=1.65 V to 1.95 V		V_{CCA}=1.4 V to 1.6 V		V_{CCA}=1.1 V to 1.3 V	Units
		Typ.	Max.	Typ.	Max.	Typ.	Max	Typ.	Max.	Typ.	
t_{rise}	Output Rise Time A Port[9]		3.0		3.5		4.0		5.0	7.5	ns
t_{fall}	Output Fall Time A Port[10]		3.0		3.5		4.0		5.0	7.5	ns
I_{OHD}	Dynamic Output Current High[9]	-11.4		-7.5		-4.7		-3.2		-1.7	mA
I_{OLD}	Dynamic Output Current Low[10]	+11.4		+7.5		+4.7		+3.2		+1.7	mA

B Port (B_n)

Output Load: C_L=15 pF, $R_L \geq M\Omega$ ($C_{I/O}$=5 pF), T_A=-40 to 85°C

Symbol	Parameter	V_{CCB}=3.0 V to 3.6 V		V_{CCB}=2.3 V to 2.7 V		V_{CCB}=1.65 V to 1.95 V		V_{CCB}=1.4 V to 1.6 V		V_{CCB}=1.1 V to 1.3 V	Units
		Typ.	Max.	Typ.	Max.	Typ.	Max	Typ.	Max.	Typ.	
t_{rise}	Output Rise Time B Port[9]		3.0		3.5		4.0		5.0	7.5	ns
t_{fall}	Output Fall Time B Port[10]		3.0		3.5		4.0		5.0	7.5	ns
I_{OHD}	Dynamic Output Current High[9]	-12.0		-7.9		-5.0		-3.4		-1.8	mA
I_{OLD}	Dynamic Output Current Low[10]	+12.0		+7.9		+5.0		+3.4		+1.8	mA

Notes:

8. Dynamic output characteristics are guaranteed, but not tested.
9. *See Figure 7.*
10. *See Figure 8.*

Downloaded from Arrow.com.

AC Characteristics

V_{CCA} = 3.0 V to 3.6 V, T_A=-40 to 85°C

Symbol	Parameter	V_{CCB}=3.0 V to 3.6 V		V_{CCB}=2.3 V to 2.7 V		V_{CCB}=1.65 V to 1.95 V		V_{CCB}=1.4 V to 1.6 V		V_{CCB}=1.1 V to 1.3 V	Units
		Min.	Max.	Min.	Max.	Min.	Max	Min.	Max.	Typ.	
t_{PLH},t_{PHL}	A to B	0.2	3.5	0.3	3.9	0.5	5.4	0.6	6.8	10.0	ns
	B to A	0.2	3.5	0.2	3.8	0.3	5.0	0.5	6.0	7.0	ns
t_{PZL},t_{PZH}	/OE to A, /OE to B		1.7		1.7		1.7		1.7	1.7	µs
t_{SKEW}	A Port, B Port (11)		0.5		0.5		0.5		1.0	1.0	ns

V_{CCA} = 2.3 V to 2.7 V, T_A=-40 to 85°C

Symbol	Parameter	V_{CCB}=3.0 V to 3.6 V		V_{CCB}=2.3 V to 2.7 V		V_{CCB}=1.65 V to 1.95 V		V_{CCB}=1.4 V to 1.6 V		V_{CCB}=1.1 V to 1.3 V	Units
		Min.	Max.	Min.	Max.	Min.	Max	Min.	Max.	Typ.	
t_{PLH},t_{PHL}	A to B	0.2	3.8	0.4	4.2	0.5	5.6	0.8	6.9	10.5	ns
	B to A	0.3	3.9	0.4	4.2	0.5	5.5	0.5	6.5	7.0	ns
t_{PZL},t_{PZH}	/OE to A, /OE to B		1.7		1.7		1.7		1.7	1.7	µs
t_{SKEW}	A Port, B Port (11)		0.5		0.5		0.5		1.0	1.0	ns

V_{CCA} = 1.65 V to 1.95 V, T_A=-40 to 85°C

Symbol	Parameter	V_{CCB}=3.0 V to 3.6 V		V_{CCB}=2.3 V to 2.7 V		V_{CCB}=1.65 V to 1.95 V		V_{CCB}=1.4 V to 1.6 V		V_{CCB}=1.1 V to 1.3 V	Units
		Min.	Max.	Min.	Max.	Min.	Max	Min.	Max.	Typ.	
t_{PLH},t_{PHL}	A to B	0.3	5.0	0.5	5.5	0.8	6.7	0.9	7.5	11.0	ns
	B to A	0.5	5.4	0.5	5.6	0.8	6.7	1.0	7.0	7.0	ns
t_{PZL},t_{PZH}	/OE to A, /OE to B		1.7		1.7		1.7		1.7	1.7	µs
t_{SKEW}	A Port, B Port (11)		0.5		0.5		0.5		1.0	1.0	ns

Note:

11. Skew is the variation of propagation delay between output signals and applies only to output signals on the same port (A_n or B_n) and switching with the same polarity (LOW-to-HIGH or HIGH-to-LOW) *(see Figure 10)*. Skew is guaranteed, but not tested.

Downloaded from Arrow.com.

AC Characteristics (Continued)

V_{CCA} = 1.4 V to 1.6 V, T_A=-40 to 85°C

Symbol	Parameter	V_{CCB}=3.0 V to 3.6 V		V_{CCB}=2.3 V to 2.7 V		V_{CCB}=1.65 V to 1.95 V		V_{CCB}=1.4 V to 1.6 V		V_{CCB}=1.1 V to 1.3 V	Units
		Min.	Max.	Min.	Max.	Min.	Max	Min.	Max.	Typ.	
t_{PLH},t_{PHL}	A to B	0.5	6.0	0.5	6.5	1.0	7.0	1.0	8.5	11.5	ns
	B to A	0.6	6.8	0.8	6.9	0.9	7.5	1.0	8.5	9.0	ns
t_{PZL},t_{PZH}	/OE to A, /OE to B		1.7		1.7		1.7		1.7	1.7	µs
t_{SKEW}	A Port, B Port(12)		1.0		1.0		1.0		1.0	1.0	ns

V_{CCA} = 1.1 V to 1.3 V, T_A=-40 to 85°C

Symbol	Parameter	V_{CCB}=3.0 V to 3.6 V	V_{CCB}=2.3 V to 2.7 V	V_{CCB}=1.65 V to 1.95 V	V_{CCB}=1.4 V to 1.6 V	V_{CCB}=1.1 V to 1.3 V	Units
		Typ.	Typ.	Typ.	Typ.	Typ.	
t_{PLH},t_{PHL}	A to B	7.1	6.5	7.0	7.1	13.5	ns
	B to A	10.3	10.5	10.8	11.3	13.5	ns
t_{PZL},t_{PZH}	/OE to A, /OE to B	1.7	1.7	1.7	1.7	1.7	µs
t_{SKEW}	A Port, B Port(12)	1.0	1.0	1.0	1.0	1.0	ns

Note:

12. Skew is the variation of propagation delay between output signals and applies only to output signals on the same port (A_n or B_n) and switching with the same polarity (LOW-to-HIGH or HIGH-to-LOW) *(see Figure 10)*. Skew is guaranteed, but not tested.

Downloaded from Arrow.com.

Maximum Data Rate

T_A=-40 to 85°C.

V_{CCA}	V_{CCB}=3.0 V to 3.6 V	V_{CCB}=2.3 V to 2.7 V	V_{CCB}=1.65 V to 1.95 V	V_{CCB}=1.4 V to 1.6 V	V_{CCB}=1.1V to 1.3 V	Units
	Min.	Min.	Min.	Min.	Typ.	
V_{CCA}=3.00 V to 3.60 V	140	120	100	80	40	Mbps
V_{CCA}=2.30 V to 2.70 V	120	120	100	80	40	Mbps
V_{CCA}=1.65 V to 1.95 V	100	100	80	60	40	Mbps
V_{CCA}=1.40 V to 1.60 V	80	80	60	60	40	Mbps
V_{CCA}=1.10 V to 1.30 V	Typ.	Typ.	Typ.	Typ.	Typ.	
	40	40	40	40	40	Mbps

Notes:

13. Maximum data rate is guaranteed, but not tested.
14. Maximum data rate is specified in megabits per second *(see Figure 9)*. It is equivalent to two times the F-toggle frequency, specified in megahertz. For example, 100 Mbps is equivalent to 50 MHz.

Capacitance

Symbol	Parameter		Conditions	T_A=+25°C Typical	Units
C_{IN}	Input Capacitance Control Pin (/OE)		V_{CCA}=V_{CCB}=GND	3	pF
$C_{I/O}$	Input / Output Capacitance	A_n	V_{CCA}=V_{CCB}=3.3 V, /OE=V_{CCA}	4	pF
		B_n		5	
C_{pd}	Power Dissipation Capacitance		V_{CCA}=V_{CCB}=3.3 V, V_I=0 V or V_{CC}, f=10 MHz	25	pF

Downloaded from Arrow.com.

I/O Architecture Benefit

The FXLA102 I/O architecture benefits the end user, beyond level translation, in the following three ways:

Auto Direction without an external direction pin.

Drive Capacitive Loads. Automatically shifts to a higher current drive mode only during "Dynamic Mode" or HL / LH transitions.

Lower Power Consumption. Automatically shifts to low-power mode during "Static Mode" (no transitions), lowering power consumption.

The FXLA102 does not require a direction pin. Instead, the I/O architecture detects input transitions on both side and automatically transfers the data to the corresponding output. For example, for a given channel, if both A and B side are at a static LOW, the direction has been established as A → B, and a LH transition occurs on the B port; the FXLA102 internal I/O architecture automatically changes direction from A → B to B → A.

During HL / LH transitions, or "Dynamic Mode," a strong output driver drives the output channel in parallel with a weak output driver. After a typical delay of approximately 10 ns – 50 ns, the strong driver is turned off, leaving the weak driver enabled for holding the logic state of the channel. This weak driver is called the "bus hold." "Static Mode" is when only the bus hold drives the channel. The bus hold can be over ridden in the event of a direction change. The strong driver allows the FXLA102 to quickly charge and discharge capacitive transmission lines during dynamic mode. Static mode conserves power, where I_{CC} is typically < 5 µA.

Bus Hold Minimum Drive Current

Specifies the minimum amount of current the bus hold driver can source/sink. The bus hold minimum drive current (I_{HOLD}) is V_{CC} dependent and guaranteed in the DC Electrical tables. The intent is to maintain a valid output state in a static mode, but that can be overridden when an input data transition occurs.

Bus Hold Input Overdrive Drive Current

Specifies the minimum amount of current required (by an external device) to overdrive the bus hold in the event of a direction change. The bus hold overdrive (I_{ODH}, I_{ODL}) is V_{CC} dependent and guaranteed in the DC Electrical tables.

Dynamic Output Current

The strength of the output driver during LH / HL transitions is *referenced on page 8, Dynamic Output Electrical Characteristics, I_{OHD}, and I_{OLD}.*

Downloaded from Arrow.com.

Test Diagrams

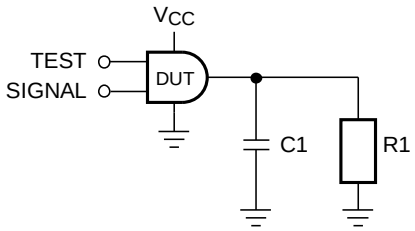


Figure 3. Test Circuit

Table 1. AC Test Conditions

Test	Input Signal	Output Enable Control
t_{PLH}, t_{PHL}	Data Pulses	0 V
t_{PZL}	0 V	HIGH to LOW Switch
t_{PZH}	V_{CCI}	HIGH to LOW Switch

Table 2. AC Load

V_{CCO}	C1	R1
1.2 V ± 0.1 V	15 pF	1 MΩ
1.5 V ± 0.1 V	15 pF	1 MΩ
1.8 V ± 0.15 V	15 pF	1 MΩ
2.5 V ± 0.2 V	15 pF	1 MΩ
3.3 V ± 0.3 V	15 pF	1 MΩ

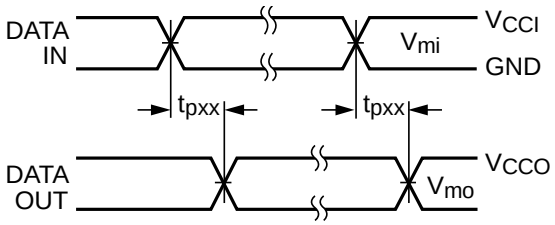


Figure 4. Waveform for Inverting and Non-Inverting Functions

Notes:
15. Input $t_R = t_F = 2.0$ ns, 10% to 90%.
16. Input $t_R = t_F = 2.5$ ns, 10% to 90%, at $V_I = 3.0$ V to 3.6 V only.

Downloaded from Arrow.com.

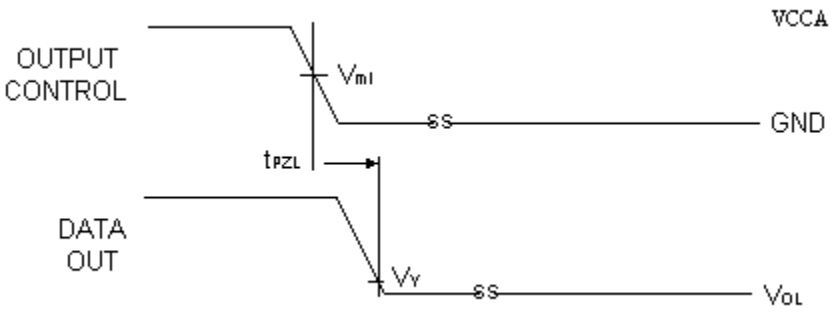


Figure 5. 3-State Output Low Enable Time

Notes:
17. Input $t_R = t_F = 2.0$ ns, 10% to 90%.
18. Input $t_R = t_F = 2.5$ ns, 10% to 90%, at $V_I = 3.0$ V to 3.6 V only.

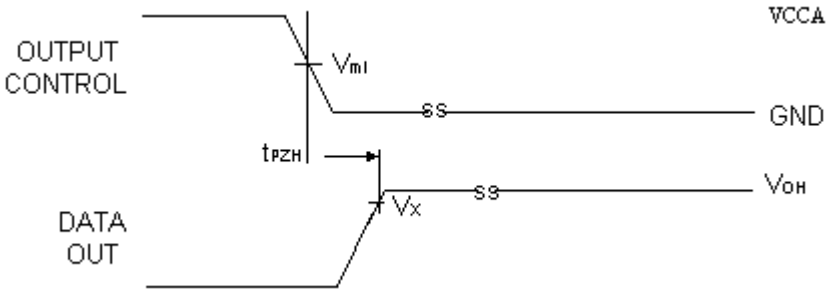


Figure 6. 3-State Output High Enable Time


Notes:
19. Input $t_R = t_F = 2.0$ ns, 10% to 90%.
20. Input $t_R = t_F = 2.5$ ns, 10% to 90%, at $V_I = 3.0$ V to 3.6 V only.

Table 3. Test Measure Points

Symbol	V_{CC}
V_{MI}[21]	V_{CCI} /2
V_{MO}	V_{CCo} /2
V_X	0.9 x V_{CCo}
V_Y	0.1 x V_{CCo}


Note:
21. $V_{CCI}=V_{CCA}$ for control pin /OE or $V_{MI}=(V_{CCA}/2)$.

Downloaded from Arrow.com.

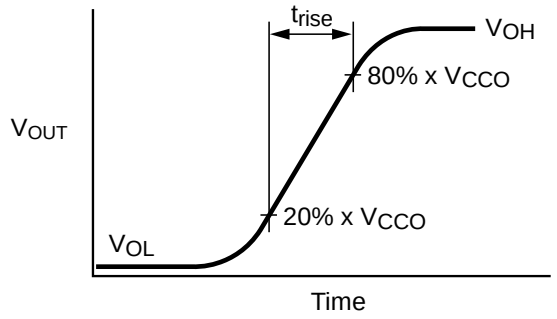


$$I_{OHD} \approx (C_L + C_{I/O}) \times \frac{\Delta V_{OUT}}{\Delta t} = (C_L + C_{I/O}) \times \frac{(20\% - 80\%) \bullet V_{CCO}}{t_{RISE}}$$

Figure 7. Active Output Rise Time and Dynamic Output Current High

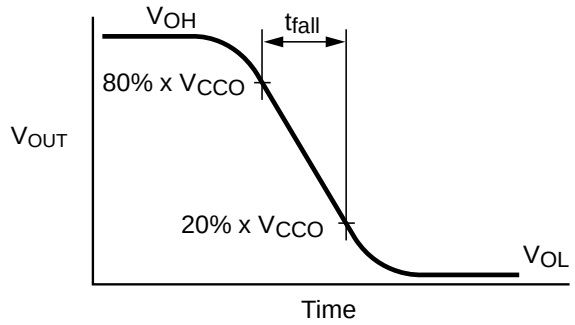

$$I_{OLD} \approx (C_L + C_{I/O}) \times \frac{\Delta V_{OUT}}{\Delta t} = (C_L + C_{I/O}) \times \frac{(80\% - 20\%) \bullet V_{CCO}}{t_{FALL}}$$

Figure 8. Active Output Fall Time and Dynamic Output Current Low

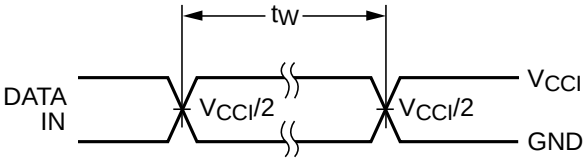

Maximum Data Rate, f = $1/t_W$

Figure 9. Maximum Data Rate

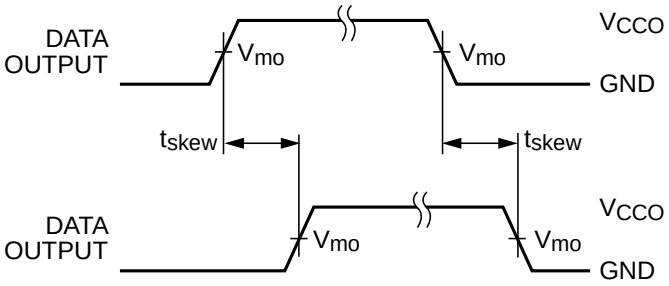



Figure 10. Output Skew Time

Note:

22. $t_{SKEW} = (t_{pHLmax} - t_{pHLmin})$ or $(t_{pLHmax} - t_{pLHmin})$

Downloaded from Arrow.com.

Physical Dimensions

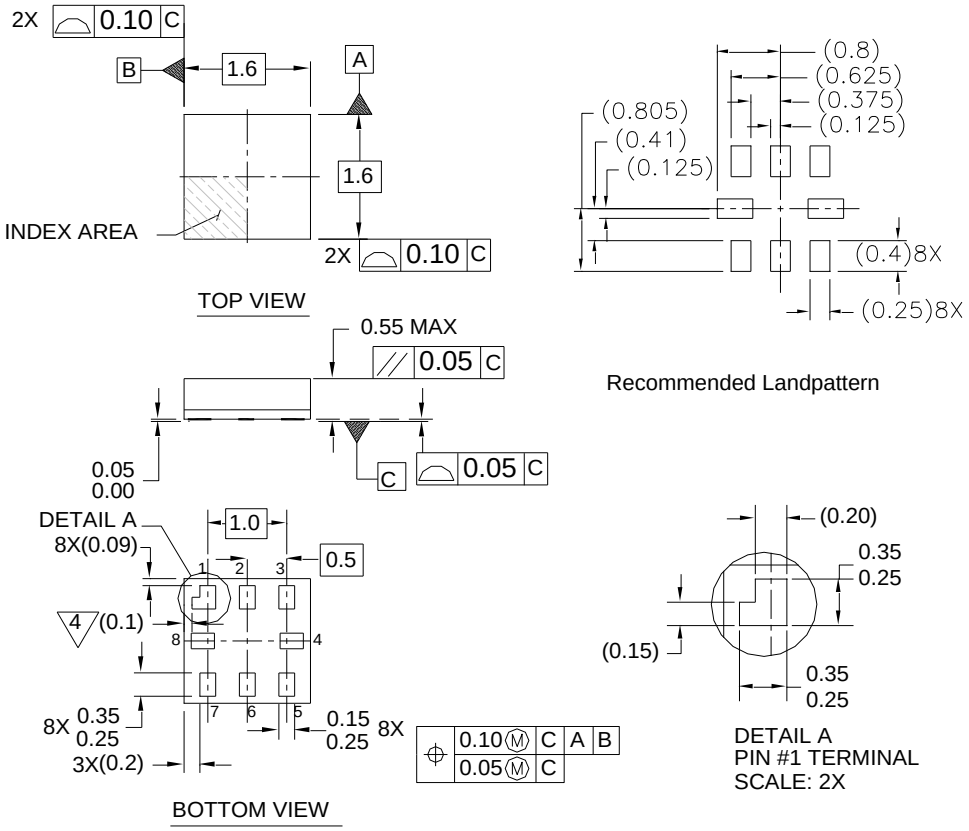

Notes:

1. PACKAGE CONFORMS TO JEDEC MO-255 VARIATION UAAD
2. DIMENSIONS ARE IN MILLIMETERS
3. DRAWING CONFORMS TO ASME Y.14M-1994
4. PIN 1 FLAG, END OF PACKAGE OFFSET
5. DRAWING FILE NAME: MKT-MAC08AREV4

MAC08AREV4

Figure 11.8-Lead, MicroPak™, 1.6mm Wide

Package drawings are provided as a service to customers considering ON Semiconductor components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a ON Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of ON Semiconductor's worldwide terms and conditions, specifically the warranty therein, which covers ON Semiconductor products.

Downloaded from Arrow.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada.
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

Downloaded from Arrow.com.