



Surface Mount Ceramic Chip Antennas for 868 MHz



VJ5301M868MXBSR chip antenna product

Vishay VJ5301M868MXBSR chip antennas are covered by one or more of the following patents:

WO2008250262 (A1), US2008303720 (A1), US2008305750 (A1), WO2008154173 (A1)

Other patents are pending.

DESCRIPTION

The VJ5301M868MXBSR ceramic chip antenna is a small form-factor, high-performance, chip-antenna designed for operation at 868 MHz. It allows manufacturers to design high quality products that do not bear the penalty of a large external antenna, and is designed to be assembled onto a PC board using a standard reflow process.

The VJ5301M868 is the latest in a family of products developed by Vishay, a world leader in manufacturing of discrete and passive components.

The VJ5301M868 series are small form-factor, high-performance chip-antennas optimized for medical, remote sensing, industrial, security, and RFID applications.

Utilizing unique Vishay materials and manufacturing technologies, these products when properly tuned also comply with the MBRAI standard for portable communication.

FEATURES

- Small outline (35 mm x 5 mm x 1.2 mm)
- 50 Ω unbalanced tuning interface (max. - 1.96 dBi gain ⁽¹⁾)
- Assembled onto a PCB in the standard reflow process
- 100 MHz half-power tuned bandwidth (820 to 920 MHz)
- High-reliability ceramic-oxide body construction
- Low-RF loss, high-Q ceramic
- Lead (Pb)-free / wet build process
- Reliable Noble Metal Electrode (NME) system
- Wide operating temperature range (-40 °C to +85 °C)
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT
HALOGEN
FREE

Note

⁽¹⁾ See figures 1 through 6 for more details on the radiation pattern (antenna gain) at 868 MHz; the PCB board ground is shorted to earth ground for tuning.

APPLICATIONS

- Medical telemetry (internal/external)
- Remote sensing and control
- Industrial automation and telemetry
- Security systems, home automation
- Long range RFID

ELECTRICAL SPECIFICATIONS

Operating temperature: -40 °C to +85 °C

Frequency range (transmission/reception):
820 MHz to 920 MHz

Note

• Electrical characteristics at +25 °C unless otherwise specified. Antenna performance is measured at 868 MHz and 50 Ω impedance unless otherwise specified. The best results are obtained by mounting the chip following the layout guidelines application note for the evaluation kit.

QUICK REFERENCE DATA

SERIES	FREQUENCY (MHz)	MAX. GAIN (dBi)	AVERAGE GAIN (dBi)	BANDWIDTH (-10 dB) (MHz)	BANDWIDTH (-3 dB) (MHz)
VJ5301M868MXBSR	868	-1.96	-4.96	32	100

CHIP ANTENNA PERFORMANCE

NOMINAL FREQUENCY (MHz)	NOMINAL IMPEDANCE (Ω)	868 MHz AVERAGE GAIN (dBi)	868 MHz PEAK GAIN (dBi)	REFLECTED POWER COEFFICIENT S ₁₁	868 MHz REFLECTED POWER LOSS	-3 dB BANDWIDTH 820 MHz to 920 MHz (MHz)	-3 dB REFLECTED POWER LOSS	-10 dB BANDWIDTH 854 MHz to 886 MHz (MHz)	-10 dB REFLECTED POWER LOSS
868	50	-4.96	-1.96	< -27 dB	0.2 %	100	50 %	32	10 %
				< 0.2 %	< 0.008 dB		3 dB		0.46 dB



VJ5301M868MXBSR TUNING

Final tuning configuration and component values for L1, L2, and C1 depend on customer PCB layout. Optimal tuning is possible with just a few standard components. The nominal values shown are for a tuned VJ5301M868MXBEK kit.

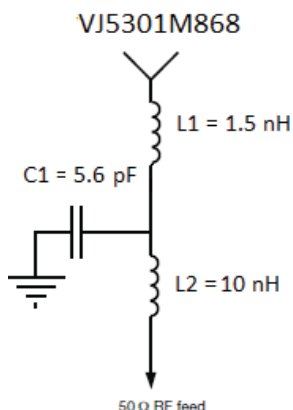


Fig. 1 - Tuning Example with Inductors L1, L2 and Capacitor C1

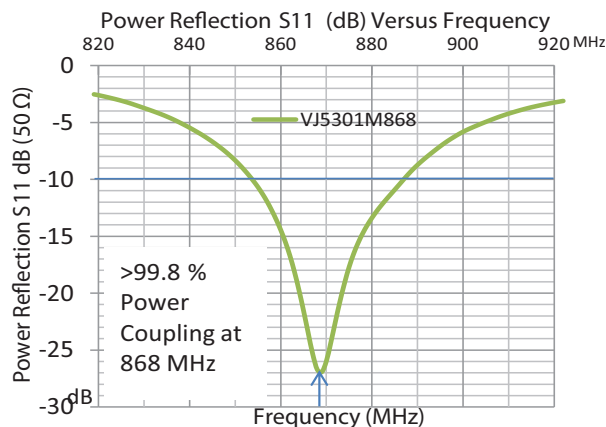


Fig. 2 - VJ5301M868 Tuned to 868 MHz with > 99.8 % Power Coupled

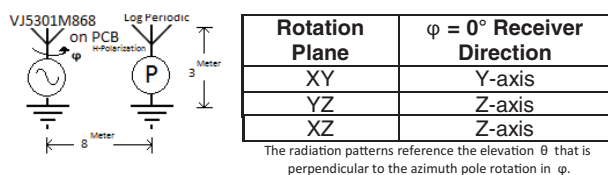


Fig. 3 - VJ5301M868 PCB Mounting and Coordinate Directions

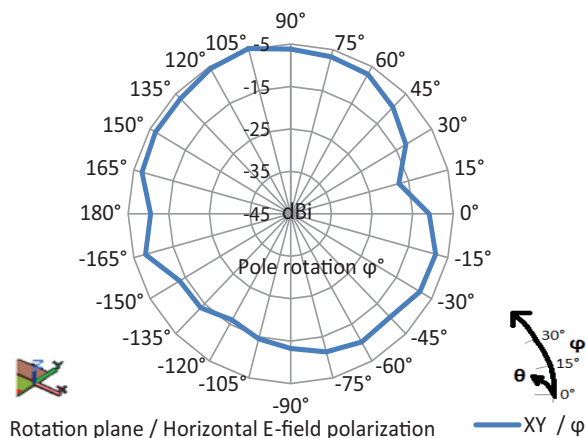


Fig. 4 - VJ5301M868MXBSR XY Radiation Pattern

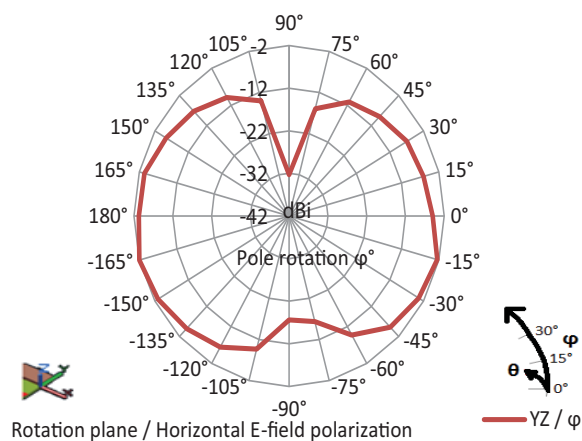


Fig. 5 - VJ5301M868MXBSR YZ Radiation Pattern

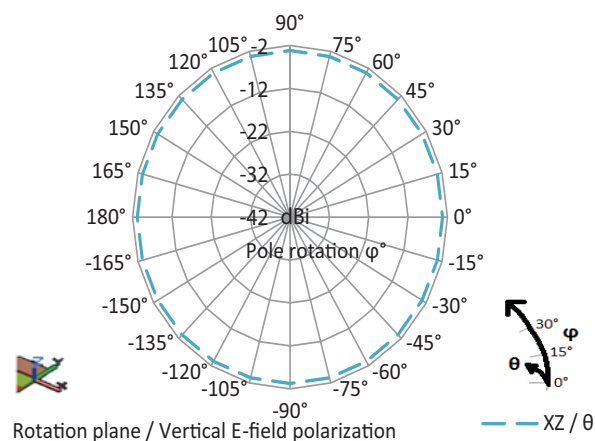


Fig. 6 - VJ5301M868MXBSR XZ Radiation Pattern

FOOTPRINT, MECHANICAL AND PCB DIMENSIONS

The antenna footprint and mechanical dimensions are presented in Figure 7. Optimal tuning is adjusted according to PCB layout.

For additional mechanical support, it is recommended to add one drop of heat curing epoxy glue.

- The glue dot should not overlap with any of the soldering pads
- Apply the glue dot at the center of the antenna.
- The glue dot area secures the chip firmly to the PCB

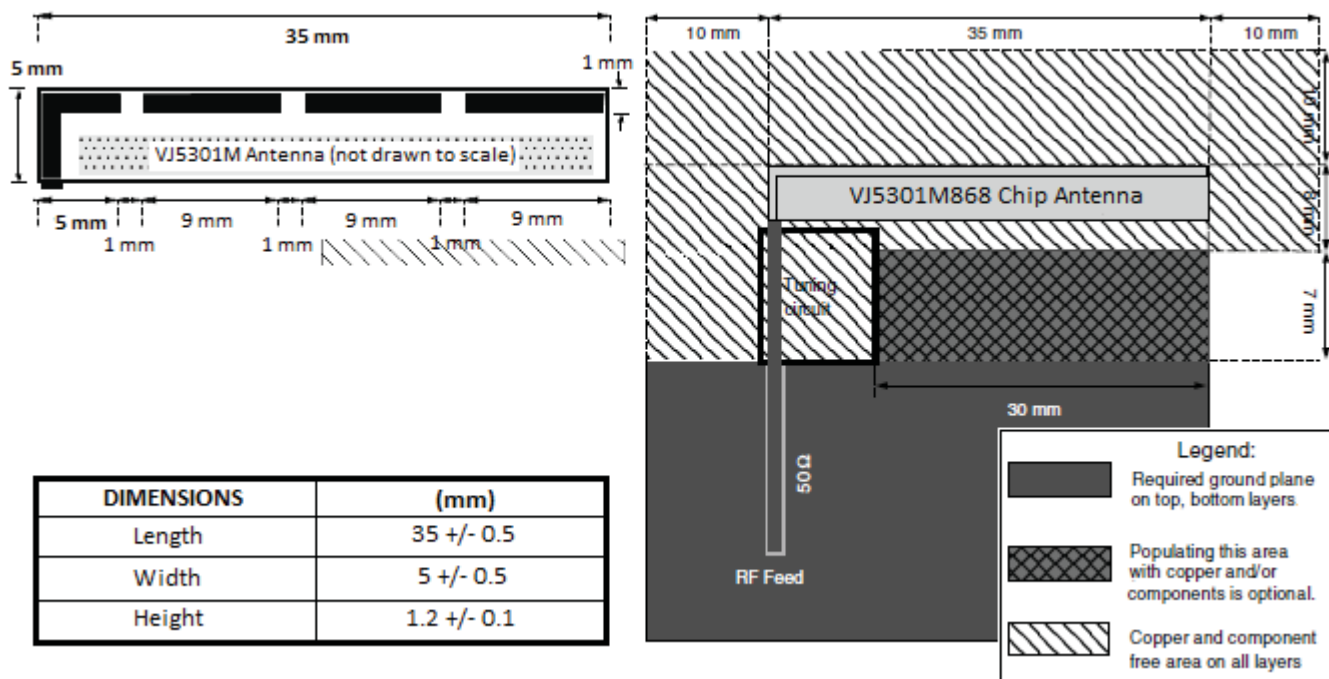


Fig. 7 - Footprint, Chip Antenna Mechanical Dimensions, and PCB Layout Dimensions of VJ5301M868

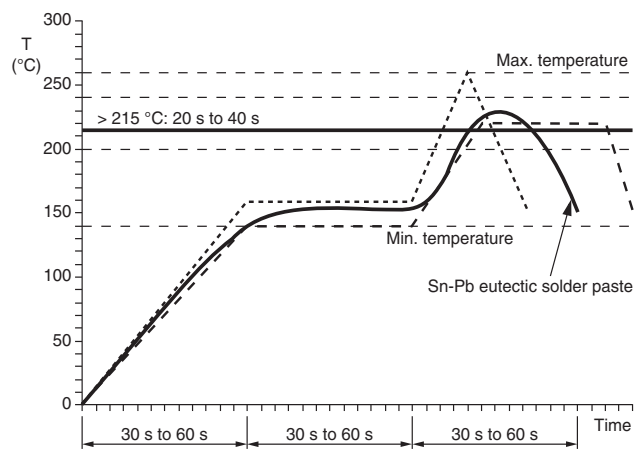


Fig. 8 - Soldering IR Reflow with SnPb Solder

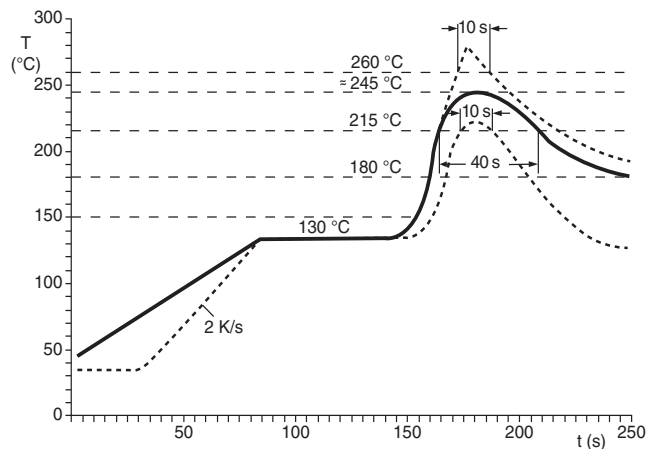


Fig. 9 - Soldering Reflow with Sn Solder

**VJ5301M868 ASSEMBLY GUIDELINES**

1. Mounting of antennas on a printed circuit board should be done by reflow soldering using the profiles shown (Figures 8, 9, and 10)
2. In order to provide the adequate strength between the antenna and the PCB apply a dot of heat cured epoxy glue in the center of the footprint of the antenna prior to soldering the antenna to the board. An example for such glue is Heraeus PD 860002 SA. The weight of the dot should be 5 mg to 10 mg.

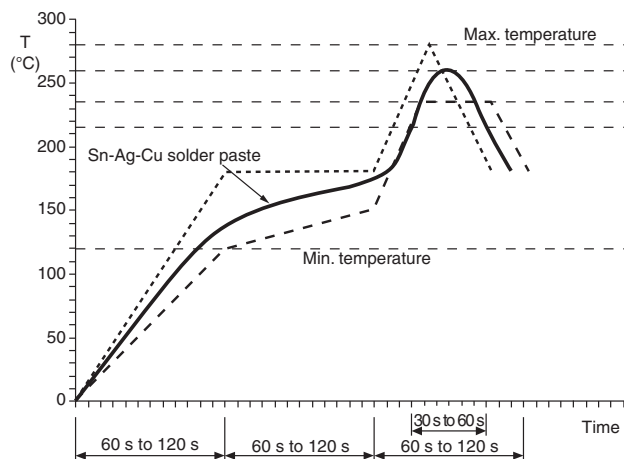


Fig. 10 - Soldering IR Reflow with SnAgCu Solder

ORDERING INFORMATION	VISHAY MATERIAL	PACKAGING QUANTITY
VJ5301M868 Chip Antenna	VJ5301M868MXBSR	1000 pieces
VJ5301M868 Evaluation Kit ⁽¹⁾	VJ5301M868MXBEK	1 kit

Note

⁽¹⁾ The VJ5301M868 kit is available for evaluation. For samples, please contact mlcc-samples@vishay.com.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.