SERIES: PDQ10-D | DESCRIPTION: DC-DC CONVERTER

FEATURES

- up to 10 W isolated output
- industry standard 1” x 1” package
- 4:1 input range
- single/dual regulated output
- over voltage, input under voltage lockout, and short circuit protections
- 1,500 Vdc isolation voltage
- five-sided shielded case
- remote on/off control
- output trim
- -40 to 105°C temperature range
- efficiency up to 86%

MODEL

MODEL	input voltage typ (Vdc)	input voltage range (Vdc)	output voltage (Vdc)	output current min (mA)	output current max (mA)	output power max (W)	ripple & noise[1] max (mVp-p)	efficiency typ (%)
PDQ10-Q24-S3-D	24	9~36	3.3	0	2,500	8.25	75	81
PDQ10-Q24-S5-D	24	9~36	5	0	2,000	10.0	75	84
PDQ10-Q24-S12-D	24	9~36	12	0	835	10.0	100	86
PDQ10-Q24-S15-D	24	9~36	15	0	666	10.0	100	86
PDQ10-Q24-D5-D	24	9~36	±5	0	±1,000	10.0	75	84
PDQ10-Q24-D12-D	24	9~36	±12	0	±416	10.0	100	86
PDQ10-Q24-D15-D	24	9~36	±15	0	±333	10.0	100	86
PDQ10-Q48-S3-D	48	18~75	3.3	0	2,500	8.25	75	82
PDQ10-Q48-S5-D	48	18~75	5	0	2,000	10.0	75	84
PDQ10-Q48-S12-D	48	18~75	12	0	835	10.0	100	86
PDQ10-Q48-S15-D	48	18~75	15	0	666	10.0	100	86
PDQ10-Q48-D5-D	48	18~75	±5	0	±1,000	10.0	75	84
PDQ10-Q48-D12-D	48	18~75	±12	0	±416	10.0	100	86
PDQ10-Q48-D15-D	48	18~75	±15	0	±333	10.0	100	86

Notes:
1. At full load, nominal input, 20 MHz bandwidth oscilloscope, with 10 µF tantalum and 1 µF ceramic capacitors on the output.
2. All specifications are measured at Ta=25°C, nominal input voltage, and rated output load unless otherwise specified.

PART NUMBER KEY

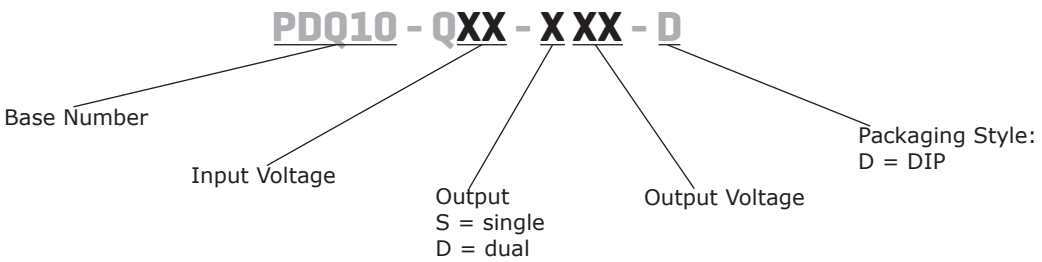

Please read our datasheet & drawing disclaimer here.
Downloaded from Arrow.com.

INPUT

parameter	conditions/description	min	typ	max	units
operating input voltage	24 Vdc input models 48 Vdc input models	9 18	24 48	36 75	Vdc Vdc
surge voltage	for maximum of 100 ms 24 Vdc input models 48 Vdc input models			 50 100	 Vdc Vdc
current	24 Vdc input models 48 Vdc input models			1.4 0.7	A A
under voltage shutdown	24 Vdc input models, power up 24 Vdc input models, power down 48 Vdc input models, power up 48 Vdc input models, power down		8.8 8.0 17 16		Vdc Vdc Vdc Vdc
remote on/off[1]	turn on (3.5~36 Vdc or open circuit) turn off (<1.2 Vdc)				
filter	LC type				
input reverse polarity protection	no				
input fuse	3 A time delay fuse for 24 Vdc input models (recommended) 1.5 A time delay fuse for 48 Vdc input models (recommended)				

Notes: 1. CMOS or open collector TTL, reference to –Vin.

OUTPUT

parameter	conditions/description	min	typ	max	units
maximum capacitive load	3.3 Vdc output models 5 Vdc output models 12 Vdc output models 15 Vdc output models ±5 Vdc output models ±12 Vdc output models ±15 Vdc output models			3,300 2,200 1,000 680 1,200 470 330	µF µF µF µF µF µF µF
voltage accuracy				±1.5	%
line regulation	from high line to low line			±0.5	%
load regulation	from 100% load to minimum load single output models dual output models			 ±0.5 ±1	 % %
voltage balance	dual output models			±1	%
cross regulation	load cross variation 25%/100% (dual output models)			±5	%
turn-on delay time, from input	from Vin, min to 10% Vo		2		ms
turn-on delay time, from on/off control	from Von/off to 10% Vo		2		ms
rise time	from 10% Vo to 90% Vo		1.5		ms
adjustability[2]	see application notes		±10		%
switching frequency	at nominal Vin, full load		280		kHz
dynamic load response	75%-100% step load change error band (Vout) recovery time		 5 500		 % µs
temperature coefficient			±0.03		%/°C

Note: 2. For single output models only.

Downloaded from Arrow.com.

PROTECTIONS

parameter	conditions/description	min	typ	max	units
over voltage protection	zener or TVS clamp 3.3 Vdc output models 5 Vdc output models (single and dual) 12 Vdc output models (single and dual) 15 Vdc output models (single and dual)		 3.9 6.2 15 18		 Vdc Vdc Vdc Vdc
over current protection		120			%
short circuit protection	continuous, automatic recovery				

SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output for 1 minute	1,500			Vdc
isolation resistance	input to output	1,000			MΩ
isolation capacitance	input to output		1,000		pF
conducted emissions	EN 55022 Class A & Class B (external circuit required, see Figure 3)				
MTBF	as per MIL-HDBK-217F, GB		1,300,000		hours
RoHS	yes				

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curves	-40		105	°C
storage temperature		-55		125	°C
operating humidity	non-condensing			95	%

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
wave soldering	see wave soldering profile			260	°C

Notes:
1. Soldering materials: Sn/Cu/Ni
2. Ramp up rate during preheat: 1.4°C/s (from 50°C to 100°C)
3. Soaking temperature: 0.5°C/s (from 100°C to 130°C), 60±20 seconds
4. Peak temperature: 260°C, above 250°C for 3~6 seconds
5. Ramp down rate during cooling: -10°C/s (from 260°C to 150°C)

WAVE SOLDERING PROFILE

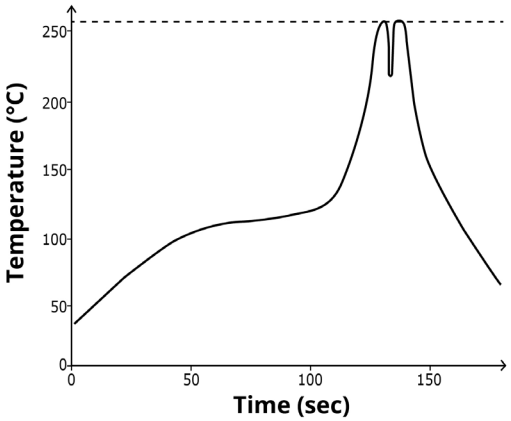

Downloaded from Arrow.com.

MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	1.00 x 1.00 x 0.4 [25.4 x 25.4 x 10.2 mm]				inches
case material	black coated copper with non-conductive base				
weight			18		g

MECHANICAL DRAWING

units: inches [mm]
tolerance: X.XX ±0.02 [±0.5]
X.XXX ±0.010 [±0.25]
pin diameter tolerance: ±0.004[±0.1]

PIN CONNECTIONS		
PIN	Function	
	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	Remote	Remote

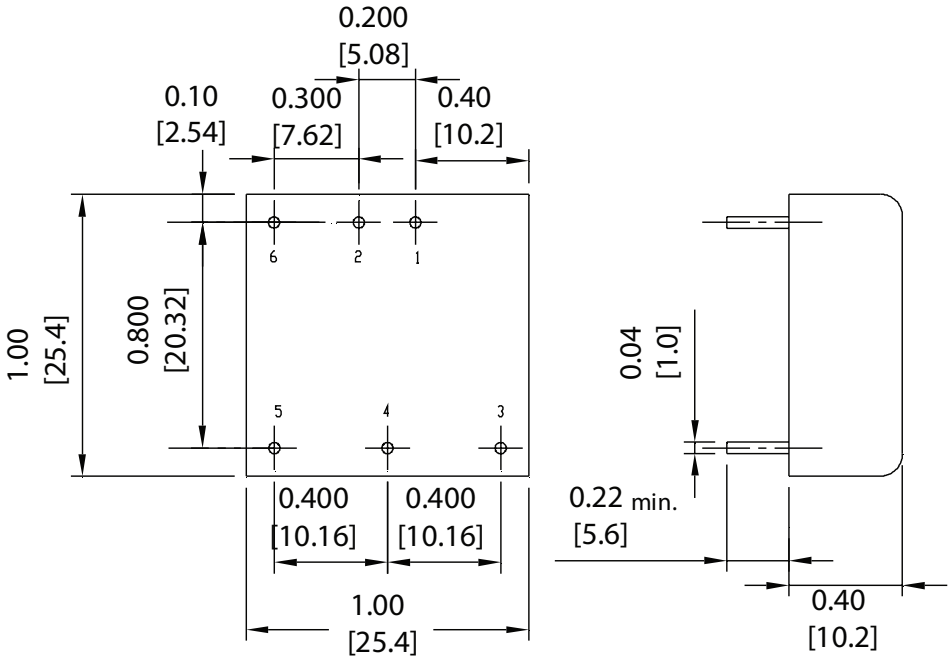

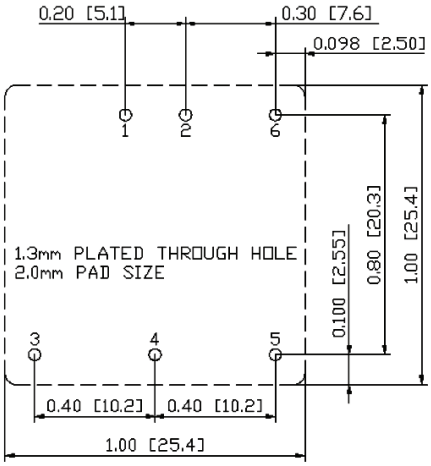

Recommended PCB Layout
Top View

Downloaded from Arrow.com.

DERATING CURVE

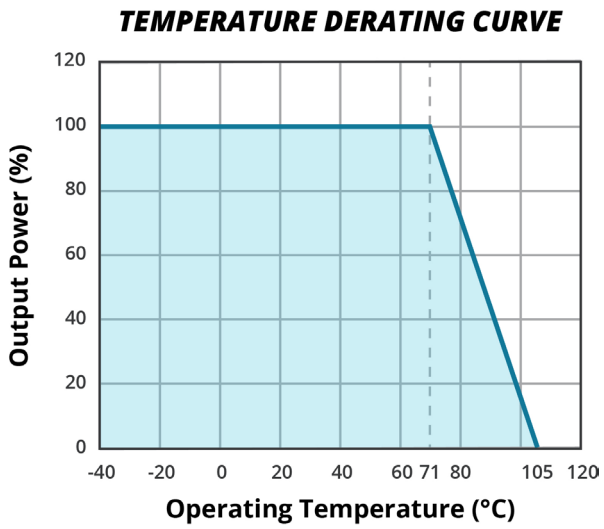

EFFICIENCY CURVES

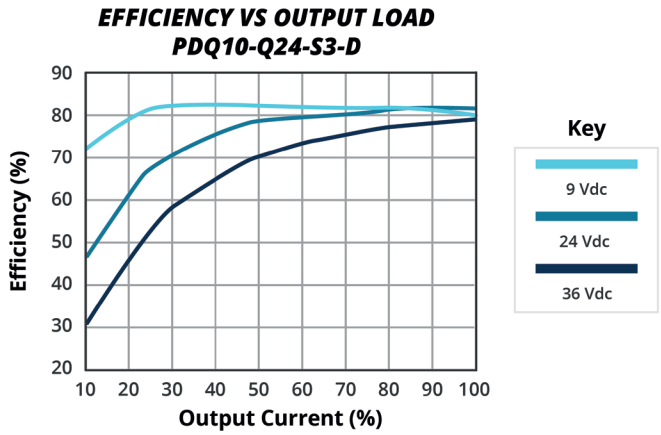

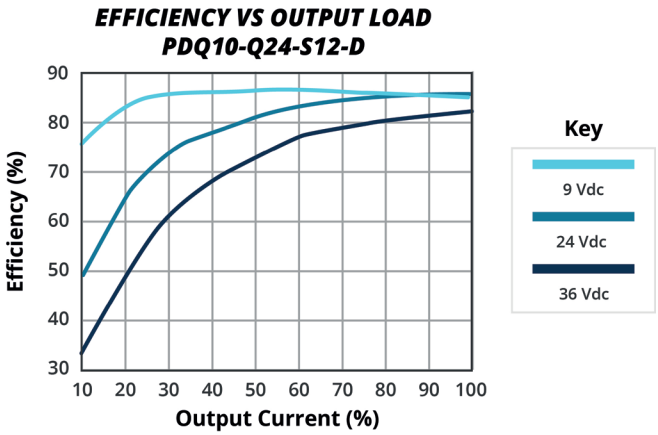

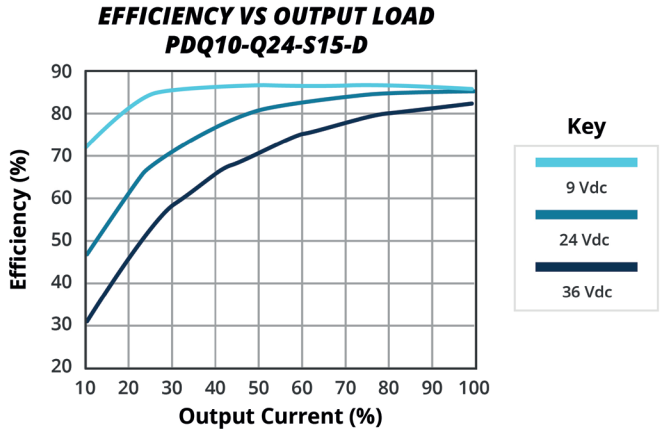

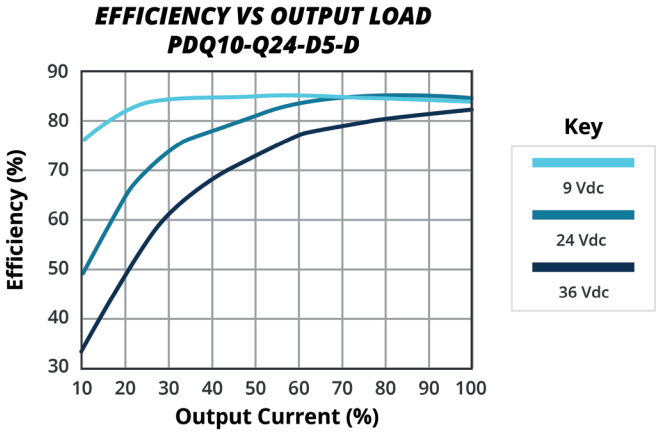

Downloaded from Arrow.com.

EFFICIENCY CURVES (CONTINUED)

EFFICIENCY VS OUTPUT LOAD
PDQ10-Q24-D15-D

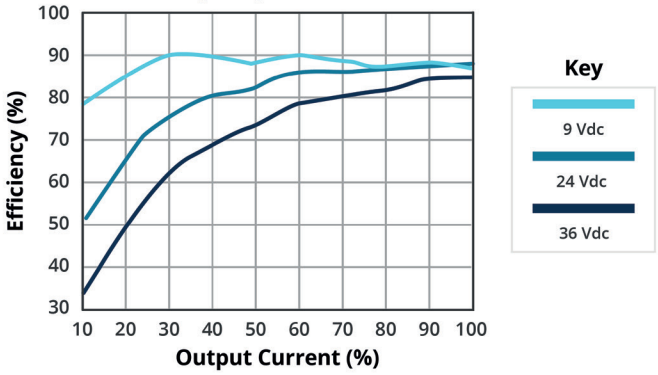

EFFICIENCY VS OUTPUT LOAD
PDQ10-Q48-S3-D

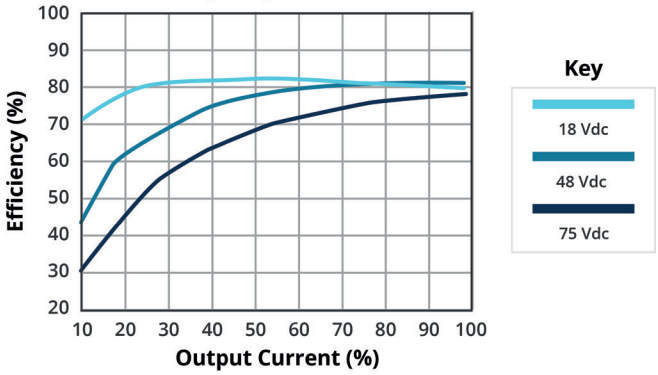

EFFICIENCY VS OUTPUT LOAD
PDQ10-Q48-S12-D

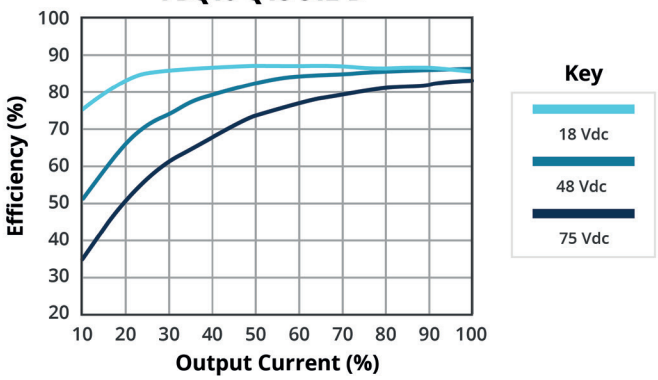

EFFICIENCY VS OUTPUT LOAD
PDQ10-Q48-S15-D

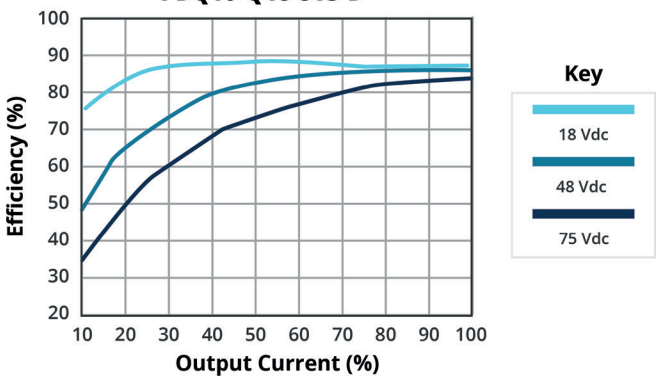

EFFICIENCY VS OUTPUT LOAD
PDQ10-Q48-D5-D

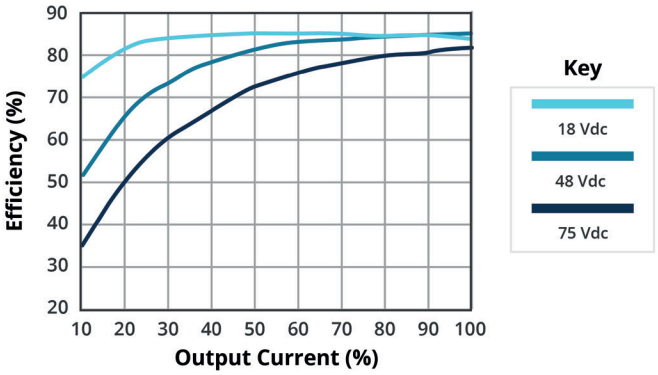

EFFICIENCY VS OUTPUT LOAD
PDQ10-Q48-D15-D

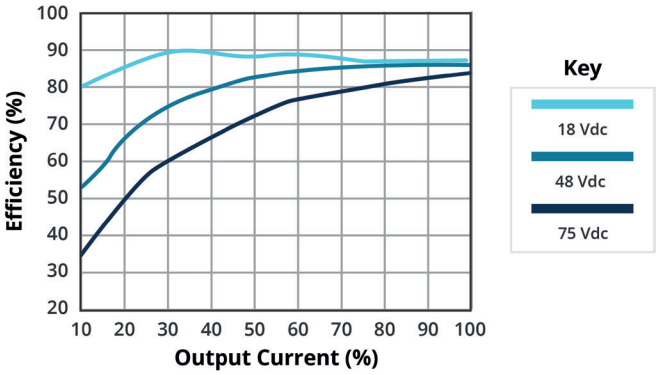

Downloaded from Arrow.com.

TEST CONFIGURATIONS

Input Ripple Current & Output Noise

Figure 1 Measuring Input Ripple Current

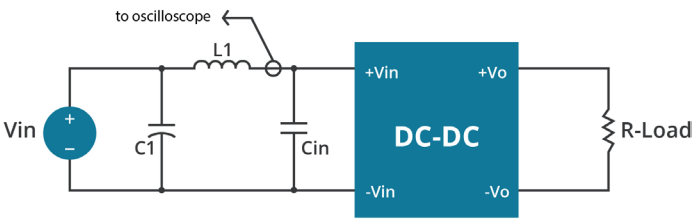

Figure 2 Measuring Output Ripple And Noise

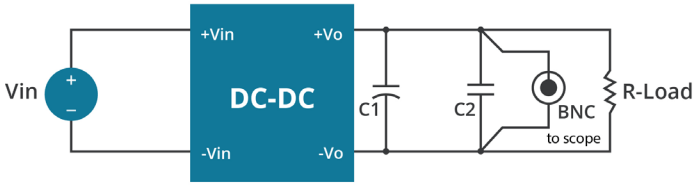

Table 1

L1	1 µH
C1	6.8 µF ceramic capacitor
Cin	none

Table 2

C1	10 µF tantalum capacitor
C2	1 µF ceramic capacitor

EMC RECOMMENDED CIRCUIT

Test Condition
Input Voltage: Nominal
Output Load: Full Load

Figure 3 Conducted Emissions Test Circuit

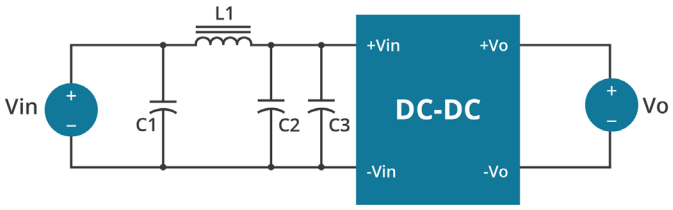

Table 3

EN55022 Class A Recommended External Circuit Components				
Input Voltage (Vdc)	C1	C2	C3	L1
24	NC	10 µF / 50 V	10 µF / 50 V	short
48	NC	4.7 µF / 100 V	4.7 µF / 100 V	short

Table 4

EN55022 Class B Recommended External Circuit Components				
Input Voltage (Vdc)	C1	C2	C3	L1
24	10 µF / 50 V	NC	10 µF / 50 V	3.3 µH
48	4.7 µF / 100 V	NC	4.7 µF / 100 V	3.3 µH

Downloaded from Arrow.com.

APPLICATION NOTES

Output Voltage Trimming

The output voltage can be adjusted (single outputs only) by using the trim pin and the use of either an external trim pot or the use of a single fixed resistor (see Figures below). If the trim function is not needed, leave the trim pin open.

Figure 4 Trim Adjustments Using A Trimpot

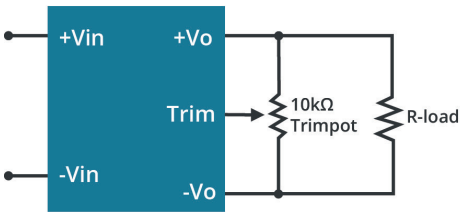

Figure 5 Trim Adjustments To Increase Output Voltage Using A Fixed Resistor

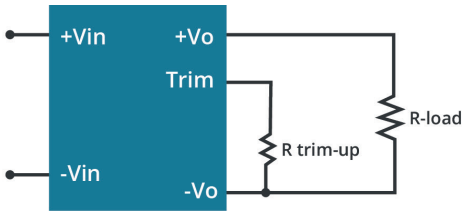

Figure 6 Trim Adjustments To Decrease Output Voltage Using A Fixed Resistor

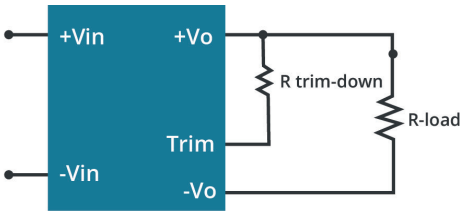

Formula for Trim Resistor

$$R_{trim-up} = \left(\frac{Vr \times R1 \times (R2 + R3)}{(Vo - V_{o,\,nom}) \times R2}\right) - Rt \quad (\text{k}\Omega)$$

$$R_{trim-down} = R1 \times \left(\frac{Vr \times R1}{(V_{o,\,nom} - Vo) \times R2} - 1\right) - Rt \quad (\text{k}\Omega)$$

Note: $R_{trim-up}$ is the external resistor in kΩ
$R_{trim-down}$ is the external resistor in kΩ
$V_{O,\,nom}$ is the nominal output voltage
V_O is the desired output voltage
R1, R2, R3, Rt, and Vr are internal (see Table 5).

Table 5

V_{NOM}	R_1	R_2	R_3	R_T	V_R
(Vdc)	(kΩ)	(kΩ)	(kΩ)	(kΩ)	(V)
3.3	2.74	1.8	0.27	9.1	1.24
5	2.32	2.32	0	8.2	2.5
12	6.8	2.4	2.32	22	2.5
15	8.06	2.4	3.9	27	2.5

Downloaded from Arrow.com.

REVISION HISTORY

rev.	description	date
1.0	initial release	07/12/2016
1.01	derating curve and circuit figures updated	07/26/2021
1.02	company address updated	11/05/2024
1.03	datasheet updated	04/24/2025
1.04	product image updated	06/09/2025

The revision history provided is for informational purposes only and is believed to be accurate.

CUI INC
a bel group

15575 SW Sequoia Pkwy #100
Portland, OR 97224
800.275.4899

Fax 503.612.2383
Belfuse.com
powersupport@belf.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Downloaded from Arrow.com.