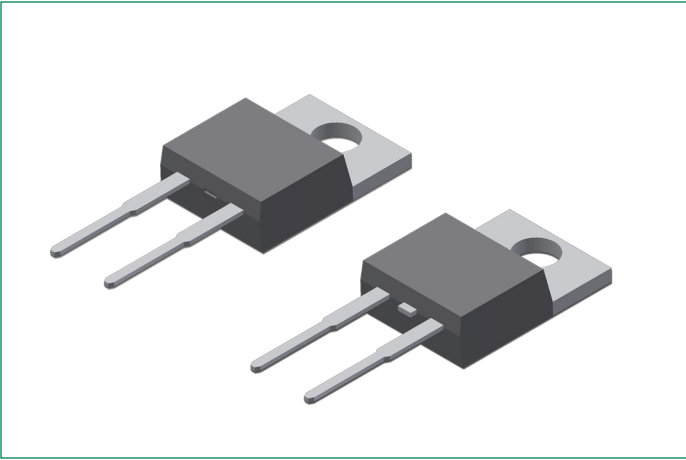


**DSS10-006A**

60 V, 16 A Schottky Rectifier Diode


RoHS

**Features**

- Very low  $V_F$
- Extremely low switching losses
- Low  $I_{RM}$  values
- Improved thermal behavior
- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Terminals finish: 100% Pure Tin
- Epoxy meets UL 94V-0

**Applications**

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

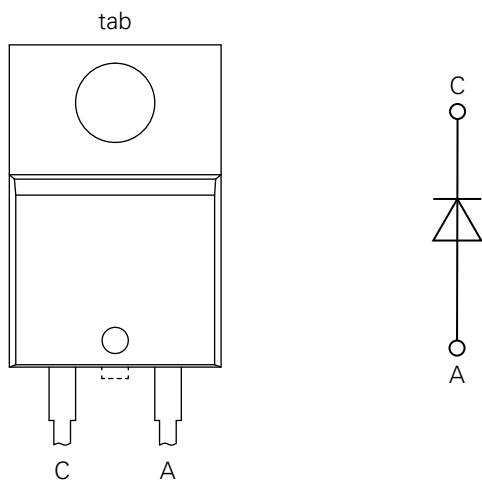**Pinout Diagram** (TO-220AC)**C:** Cathode; **A:** Anode; **tab:** Cathode

**Maximum Ratings** ( $T_A = 25^\circ\text{C}$  unless otherwise specified)

| Symbol      | Characteristics                             | Condition                                                        | Max. | Units |
|-------------|---------------------------------------------|------------------------------------------------------------------|------|-------|
| $V_{RRM}$   | Peak Repetitive Reverse Voltage             | –                                                                | 60   | V     |
| $V_{RWM}$   | Working Peak Reverse Voltage                |                                                                  |      |       |
| $V_R$       | DC Blocking Voltage                         |                                                                  |      |       |
| $I_{F(AV)}$ | Average Rectified Forward Current           | 50% duty cycle @ $T_C=160^\circ\text{C}$ , rectangular wave form | 10   | A     |
| $I_{FSM}$   | Peak One Cycle Non-Repetitive Surge Current | 10 ms, Half Sine pulse, $T_J=25^\circ\text{C}$                   | 170  | A     |
| $P_{tot}$   | Total power dissipation                     | $T_C=25^\circ\text{C}$                                           | 90   | W     |

**Electrical Characteristics** ( $T_A = 25^\circ\text{C}$  unless otherwise specified)

| Symbol   | Characteristics                   | Conditions                                                                | Typ. | Max. | Units         |
|----------|-----------------------------------|---------------------------------------------------------------------------|------|------|---------------|
| $V_{F1}$ | Forward Voltage Drop <sup>1</sup> | @ 10A, Pulse, $T_J = 25^\circ\text{C}$                                    | –    | 0.80 | V             |
| $V_{F1}$ |                                   | @ 10A, Pulse, $T_J = 125^\circ\text{C}$                                   | –    | 0.65 | V             |
| $I_{R1}$ | Reverse Current*                  | @ $V_R = \text{rated } V_R, T_J = 25^\circ\text{C}$                       | –    | 300  | $\mu\text{A}$ |
| $I_{R2}$ |                                   | @ $V_R = \text{rated } V_R, T_J = 125^\circ\text{C}$                      | –    | 10   | mA            |
| $C_T$    | Junction Capacitance              | @ $V_R = 12\text{ V}, T_C = 25^\circ\text{C}$<br>$f_{SIG} = 1\text{ MHz}$ | 661  | –    | pF            |

**Note 1:** Pulse width < 300  $\mu\text{s}$ , duty cycle < 2%

**Thermal-Mechanical Specifications**

| Symbol          | Characteristics                              | Condition    | Specification      | Units              |
|-----------------|----------------------------------------------|--------------|--------------------|--------------------|
| $T_J$           | Junction Temperature                         | –            | -55 to +175        | $^\circ\text{C}$   |
| $T_O$           | Operation Temperature                        | –            | -55 to +150        | $^\circ\text{C}$   |
| $T_{stg}$       | Storage Temperature                          | –            | -55 to +150        | $^\circ\text{C}$   |
| $M_D$           | Mounting torque                              | –            | Min 0.4<br>Max 0.6 | Nm                 |
| $F_C$           | Mounting force with clip                     | –            | Min 20<br>Max 60   | N                  |
| $R_{\theta JC}$ | Maximum Thermal Resistance Junction to Case  | DC operation | 1.7                | $^\circ\text{C/W}$ |
| $R_{\theta CS}$ | Typical Thermal Resistance Case to Heat Sink | –            | 0.5                | $^\circ\text{C/W}$ |
| wt              | Approximate Weight                           | –            | 1.6                | g                  |

Characteristic Curves

Fig. 1. Typical Forward Characteristics

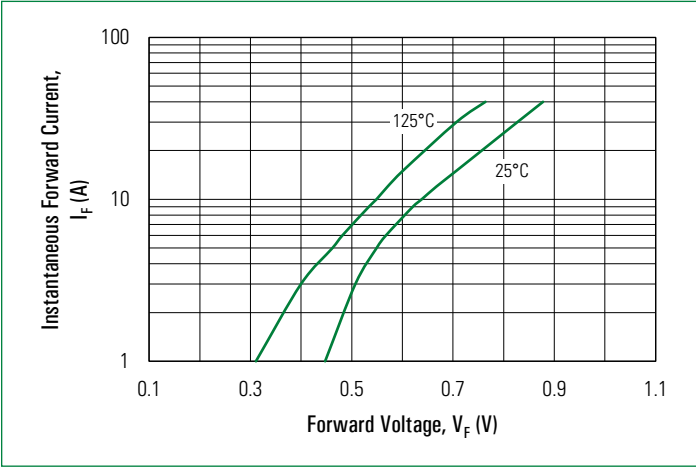


Fig. 2. Typical Reverse Characteristics



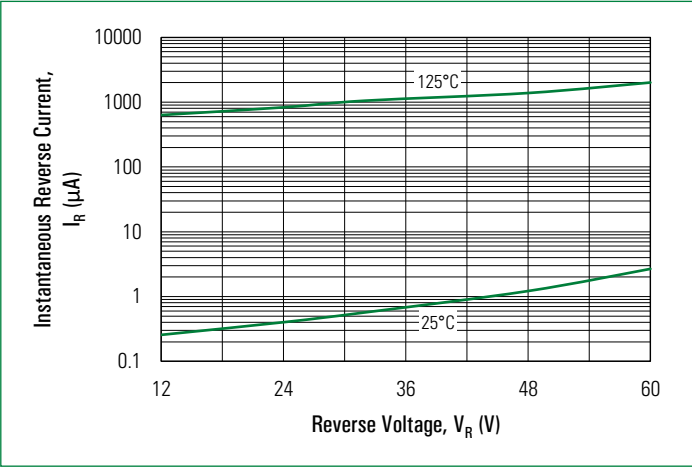


Fig. 3. Typical Junction Capacitance

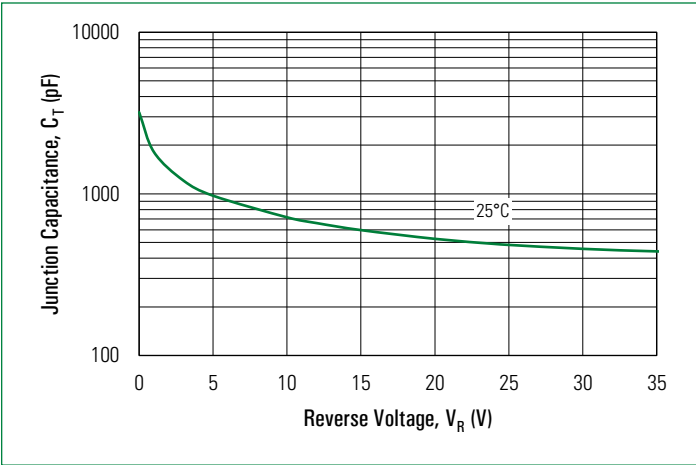


Part Outline Drawing (TO-220AC)

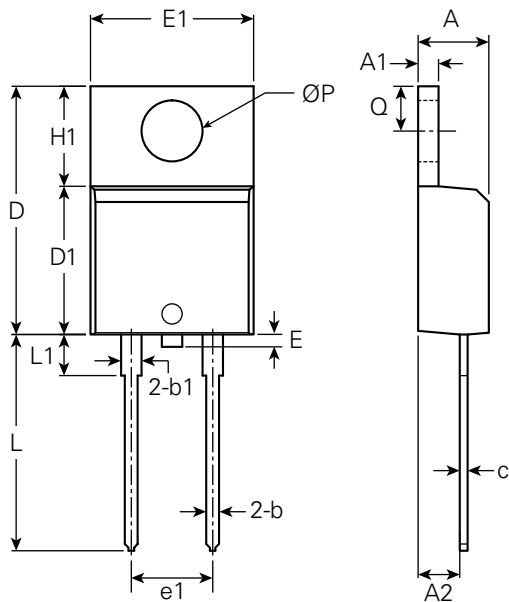

| Symbol | Inches |         |      | Millimeters |         |       |
|--------|--------|---------|------|-------------|---------|-------|
|        | Min.   | Typical | Max. | Min.        | Typical | Max.  |
| A      | 0.14   | –       | 0.19 | 3.56        | –       | 4.83  |
| A1     | 0.02   | –       | 0.06 | 0.51        | –       | 1.40  |
| A2     | 0.08   | –       | 0.11 | 2.03        | –       | 2.92  |
| b      | 0.01   | –       | 0.04 | 0.38        | –       | 1.02  |
| b1     | 0.04   | –       | 0.07 | 1.14        | –       | 1.78  |
| c      | 0.12   | –       | 0.02 | 0.31        | –       | 0.61  |
| D      | 0.56   | –       | 0.65 | 14.22       | –       | 16.51 |
| D1     | 0.33   | –       | 0.37 | 8.38        | –       | 9.42  |
| E      | –      | –       | 0.07 | –           | –       | 1.78  |
| E1     | 0.38   | 0.40    | 0.42 | 9.65        | 10.16   | 10.67 |
| e1     | –      | 0.20    | –    | –           | 5.08    | –     |
| H1     | 0.23   | –       | 0.27 | 5.84        | –       | 6.86  |
| L      | 0.50   | –       | 0.58 | 12.70       | –       | 14.73 |
| L1     | –      | –       | 0.25 | –           | –       | 6.35  |
| Q      | 0.1    | –       | 0.13 | 2.54        | –       | 3.43  |
| ØP     | –      | 0.14    | –    | –           | 3.56    | –     |

Part Number and Marking

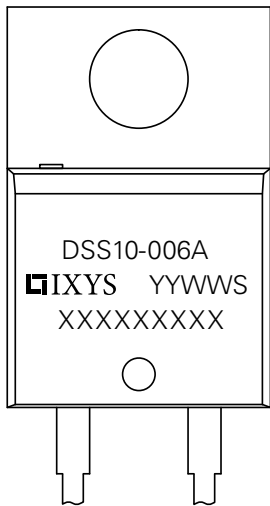


- D = Diode
- S = Schottky Diode
- S = Product Generation
- 10 = Current Rate
- 006 = Voltage Rating
- A = Package Code
- YY = Year
- WW = Work Week
- S = Plant Location Code
- XXXXXXXXXX = Lot Number

Ordering Information

| Part Number | Marking    | Packing Mode | Quantity     |
|-------------|------------|--------------|--------------|
| DSS10-006A  | DSS10-006A | Tube         | 50 pcs/ tube |

Packing Specifications

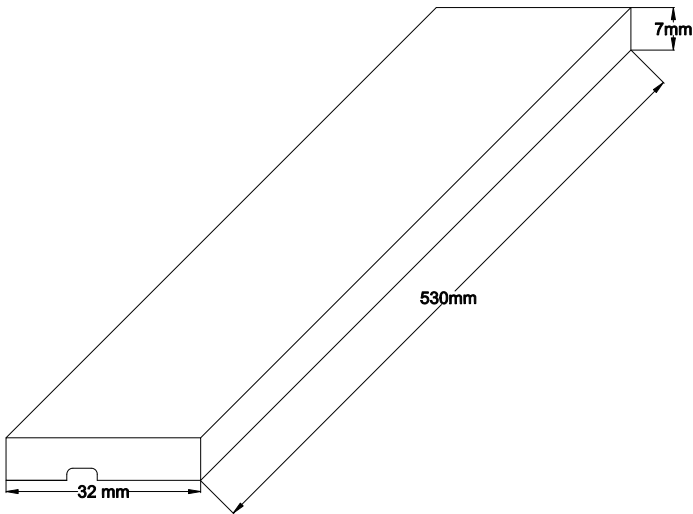

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.



Part of:

