

Data sheet ST025xxHDNC AST025


Page 1/5


P/N AST025xx04


xx=number of poles

2025/08/25 Version: A

Illustrations









See enlarged drawings at the end of document

Product specification

- · spring clamp terminal block, solderable
- centerline 5.00 mm, direction of connection 90°
- · fittable without loss of poles
- color gray
- eccentric lever





Data sheet ST025xxHDNC AST025

Page 2/5

P/N AST025xx04 xx=number of poles 2025/08/25

Version: A

			version:	
Technical Data				
General Data				
Solder pin length	5 mm			
min. number of poles	2			
max. number of poles	24			
Insulating material class	CTI 600			
clearance/creepage dist.	4 mm			
Protection category	IP20			
Insul. strip length	6 mm			
Rated current	12 A			
Overvoltage category	III	III	II	
Pollution degree	3	2	2	
Rated voltage	40 V	250 V	250 V	
Rated test voltage	2.5 kV	2.5 kV	2.5 kV	
Terminal data				
rat.wiring solid AWGmax	0.2 mm² - 2 mm² / AWG 28 - AWG 14			
rat.wiring strand.AWGmax	0.2 mm² - 2 mm² / AWG 28 - AWG 14			
Approvals				
CSUS V/A/AWG	300 / 13 / 28 - 14			
approval UL - File No.	E121004	E121004		
SEV	250 V / 13.5 A / T60			
Material				
insulating material	PA			
flammability class	V0			
spring material	Spring steel			
contact material	CuSn			
Contact surface	Ni + Sn	Ni + Sn		
Glow-Wire Flammability GWFI	850 °C acc. to	850 °C acc. to IEC 60695-2-12		
Glow-Wire Flammability GWIT	-			
Climatic Data				
upper limit temperature	105 °C			
lower limit temperature	-40 °C			







Data sheet ST025xxHDNC AST025

Page 3/5

P/N AST025xx04

xx=number of poles 2025/08/25

Version: A

Technical Data

general		
Tolerance	ISO 2768 -mH	
Solderability	Acc. to JEDEC JESD22-B102E 245°C/5s	

Application note

This product is a standard product of METZ CONNECT. METZ CONNECT is not aware of the specific intended use of the goods by the Customer or any customers of the Customer. The Customer guarantees that it has fully and sufficiently tested the use of the goods and any product modifications, product changes or product enhancements with regard to the specific intended use in accordance with the state of the art or in any other way. At METZ CONNECT's request, the Customer shall submit and make available meaningful evidence (e.g. test and laboratory protocols, certifications, etc.).







Data sheet ST025xxHDNC AST025

Page 4/5


P/N AST025xx04

xx=number of poles 2025/08/25

Version: A

Illustrations

Dimensional drawing as an example

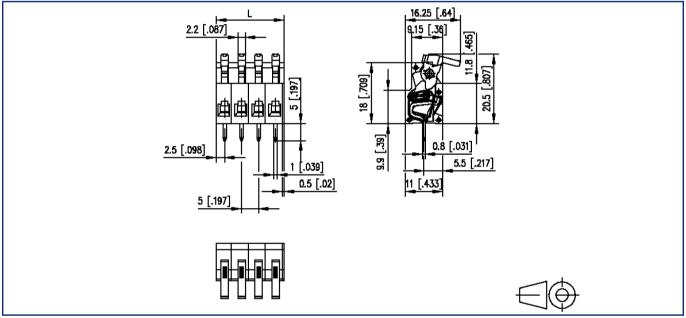

L=(pole size - 1) x centerline + 5 mm [0.197]





Data sheet ST025xxHDNC AST025

Page 5/5

P/N AST025xx04

xx=number of poles 2025/08/25

Version: A

Illustrations

Drill pattern as an example

