



## UCCx808-x Low Power Current Mode Push-Pull PWM

### 1 Features

- Dual Output Drive Stages in Push-Pull Configuration
- 130- $\mu$ A Typical Starting Current
- 1-mA Typical Run Current
- Operation to 1-MHz
- Internal Soft-Start
- On-Chip Error Amplifier With 2-MHz Gain Bandwidth Product
- On-Chip VDD Clamping
- Output Drive Stages Capable Of 500-mA Peak Source Current, 1-A Peak Sink Current

### 2 Applications

- Server and Desktop Power Supplies
- Telecom Power Supplies
- DC-DC Converters
- Switched-Mode Power Supplies

### 3 Description

The UCCx808-x is a family of BiCMOS push-pull, high-speed, low-power, pulse-width modulators. The UCCx808 contains all of the control and drive circuitry required for offline or DC-to-DC fixed frequency current-mode switching power supplies with minimal external parts count.


The UCCx808-x dual output drive stages are arranged in a push-pull configuration. Both outputs switch at half the oscillator frequency using a toggle flip-flop. The dead time between the two outputs is typically 60 ns to 200 ns depending on the values of the timing capacitor and resistors, thus limiting each output stage duty cycle to less than 50%.

#### Device Information<sup>(1)</sup>

| PART NUMBER            | PACKAGE  | BODY SIZE (NOM)   |
|------------------------|----------|-------------------|
| UCC2808-1<br>UCC2808-2 | SOIC (8) | 4.90 mm × 3.91 mm |
| UCC3808-1<br>UCC3808-2 | PDIP (8) | 9.81 mm × 6.35 mm |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

#### Simplified Schematic

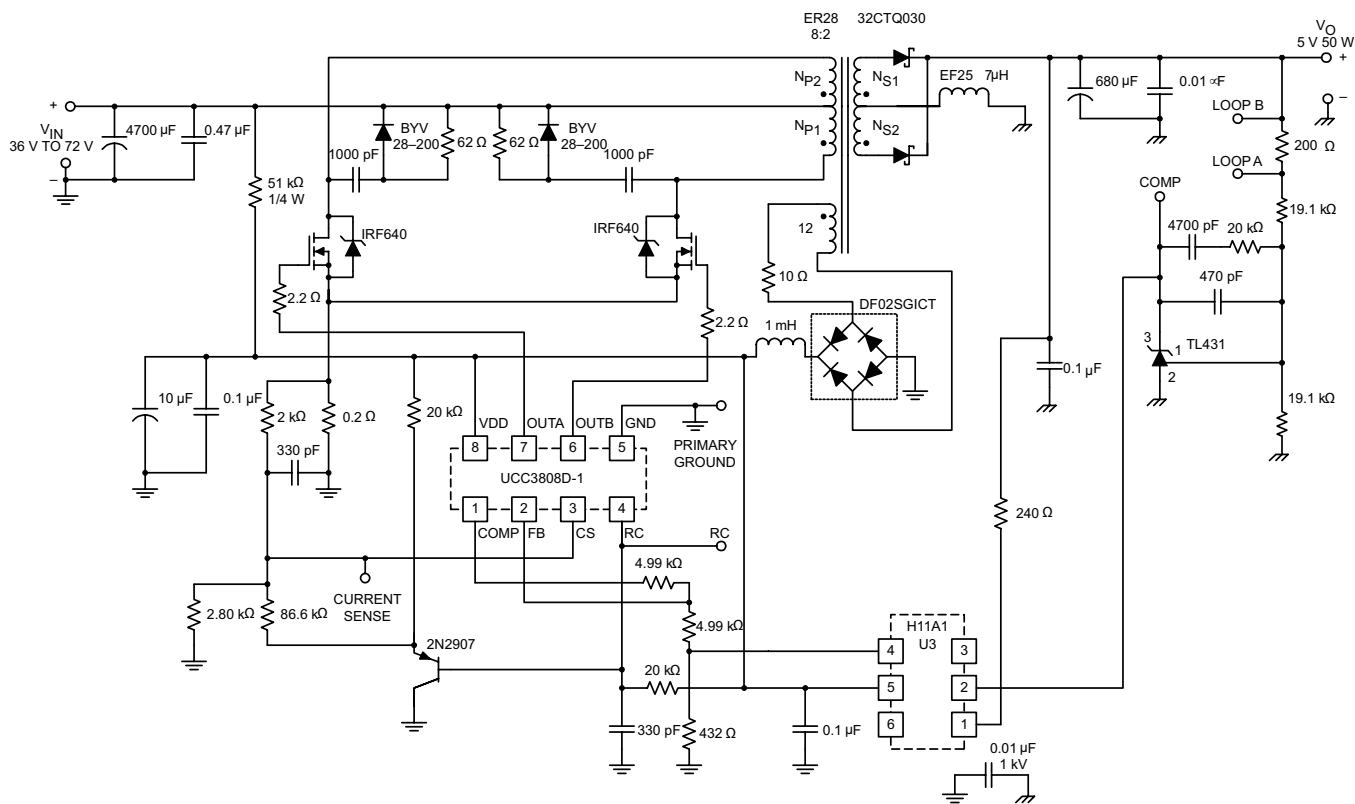

## Table of Contents



|                                                |          |                                                  |           |
|------------------------------------------------|----------|--------------------------------------------------|-----------|
| <b>1 Features</b> .....                        | <b>1</b> | <b>8 Application and Implementation</b> .....    | <b>10</b> |
| <b>2 Applications</b> .....                    | <b>1</b> | 8.1 Application Information.....                 | 10        |
| <b>3 Description</b> .....                     | <b>1</b> | 8.2 Typical Application .....                    | 10        |
| <b>4 Revision History</b> .....                | <b>2</b> | <b>9 Power Supply Recommendations</b> .....      | <b>11</b> |
| <b>5 Pin Configuration and Functions</b> ..... | <b>3</b> | <b>10 Layout</b> .....                           | <b>12</b> |
| <b>6 Specifications</b> .....                  | <b>4</b> | 10.1 Layout Guidelines .....                     | 12        |
| 6.1 Absolute Maximum Ratings .....             | 4        | 10.2 Layout Example .....                        | 12        |
| 6.2 ESD Ratings.....                           | 4        | <b>11 Device and Documentation Support</b> ..... | <b>13</b> |
| 6.3 Recommended Operating Conditions.....      | 4        | 11.1 Related Links .....                         | 13        |
| 6.4 Electrical Characteristics.....            | 4        | 11.2 Documentation Support .....                 | 13        |
| 6.5 Typical Characteristics .....              | 6        | 11.3 Community Resources.....                    | 13        |
| <b>7 Detailed Description</b> .....            | <b>7</b> | 11.4 Trademarks .....                            | 13        |
| 7.1 Overview .....                             | 7        | 11.5 Electrostatic Discharge Caution.....        | 13        |
| 7.2 Functional Block Diagram .....             | 7        | 11.6 Glossary .....                              | 13        |
| 7.3 Feature Description.....                   | 8        | <b>12 Mechanical, Packaging, and Orderable</b>   |           |
| 7.4 Device Functional Modes.....               | 9        | <b>Information</b> .....                         | <b>13</b> |

## 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision D (August 2002) to Revision E                                                                                                                                                                                                                                                                                                  | Page |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| • Removed references to the TSSOP packaging .....                                                                                                                                                                                                                                                                                                    | 1    |
| • Added <i>ESD Ratings</i> table, <i>Feature Description</i> section, <i>Device Functional Modes</i> , <i>Application and Implementation</i> section, <i>Power Supply Recommendations</i> section, <i>Layout</i> section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section. .... | 1    |

## 5 Pin Configuration and Functions

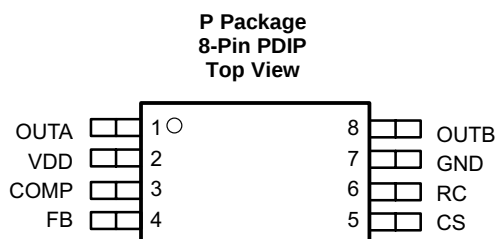

### Pin Functions

| PIN  |     | I/O | DESCRIPTION                                                        |
|------|-----|-----|--------------------------------------------------------------------|
| NAME | NO. |     |                                                                    |
| COMP | 1   | I/O | Output of the error amplifier and the input of the PWM comparator. |
| CS   | 3   | I   | Input to the PWM, peak current, and overcurrent comparators.       |
| FB   | 2   | I   | Inverting input to the error amplifier.                            |
| GND  | 5   | —   | Reference ground and power ground for all functions.               |
| OUTA | 7   | O   | Alternating high current output stage.                             |
| OUTB | 6   | O   | Alternating high current output stage.                             |
| RC   | 4   | I   | Oscillator programming pin.                                        |
| VDD  | 8   | —   | Power input connection for this device.                            |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                                                            | MIN  | MAX | UNIT             |
|------------------------------------------------------------|------|-----|------------------|
| Supply voltage ( $I_{DD} \leq 10$ mA)                      |      | 15  | V                |
| Supply current                                             |      | 20  | mA               |
| OUTA/OUTB source current (peak) <sup>(2)</sup>             | –0.5 |     | A                |
| OUTA/OUTB sink current (peak) <sup>(2)</sup>               |      | 1.0 | A                |
| Analog inputs (FB, CS) – 0.3 V to VDD+0.3 V                |      | 6   | V                |
| Power dissipation at $T_A = 25^\circ\text{C}$ (N Package)  |      | 1   | W                |
| Power dissipation at $T_A = 25^\circ\text{C}$ (D Package)  |      | 650 | mW               |
| Power dissipation at $T_A = 25^\circ\text{C}$ (PW Package) |      | 400 | mW               |
| $T_J$ Junction temperature                                 | –55  | 150 | $^\circ\text{C}$ |
| Lead temperature (soldering, 10 sec.)                      |      | 300 | $^\circ\text{C}$ |
| $T_{stg}$ Storage temperature                              | –65  | 150 | $^\circ\text{C}$ |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Currents are positive into, negative out of the specified terminal. Consult Packaging Section of the Power Supply Control Data Book (SLUD003) for thermal limitations and considerations of packages.

### 6.2 ESD Ratings

|                                     |                                                                                | VALUE      | UNIT |
|-------------------------------------|--------------------------------------------------------------------------------|------------|------|
| $V_{(ESD)}$ Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | $\pm 2500$ | V    |
|                                     | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | $\pm 1500$ |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                            |           | MIN | MAX | UNIT             |
|----------------------------|-----------|-----|-----|------------------|
| $V_{DD}$ Supply Voltage    | UCCx808-1 | 13  | 14  | V                |
|                            | UCCx808-2 | 5   | 14  |                  |
| $T_J$ Junction Temperature | UCC2808-x | –40 | 85  | $^\circ\text{C}$ |
|                            | UCC3808-x | 0   | 70  |                  |

### 6.4 Electrical Characteristics

$T_A = 0^\circ\text{C}$  to  $70^\circ\text{C}$  for the UCC3808-x,  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  for the UCC2808-x and  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  for the UCC1808-x,  $V_{DD} = 10$  V<sup>(1)</sup>, 1- $\mu\text{F}$  capacitor from VDD to GND,  $R = 22$  k $\Omega$ ,  $C = 330$  pF,  $T_A = T_J$ , (unless otherwise specified)

| PARAMETER                               | TEST CONDITIONS        | MIN  | TYP | MAX  | UNIT          |
|-----------------------------------------|------------------------|------|-----|------|---------------|
| <b>OSCILLATOR SECTION</b>               |                        |      |     |      |               |
| Oscillator frequency                    |                        | 175  | 194 | 213  | kHz           |
| Oscillator amplitude/VDD <sup>(2)</sup> |                        | 0.44 | 0.5 | 0.56 | V/V           |
| <b>ERROR AMPLIFIER SECTION</b>          |                        |      |     |      |               |
| Input voltage                           | COMP = 2 V             | 1.95 | 2   | 2.05 | V             |
| Input bias current                      |                        | –1   |     | 1    | $\mu\text{A}$ |
| Open-loop voltage gain                  |                        | 60   | 80  |      | dB            |
| COMP sink current                       | FB = 2.2 V, COMP = 1 V | 0.3  | 2.5 |      | mA            |

- (1) Does not include current in the external oscillator network.
- (2) Measured at RC. Signal amplitude tracks VDD.

## Electrical Characteristics (continued)

$T_A = 0^\circ\text{C}$  to  $70^\circ\text{C}$  for the UCC3808-x,  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  for the UCC2808-x and  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  for the UCC1808-x,  $V_{DD} = 10\text{ V}^{(1)}$ ,  $1\text{-}\mu\text{F}$  capacitor from  $V_{DD}$  to  $GND$ ,  $R = 22\text{ k}\Omega$ ,  $C = 330\text{ pF}$ ,  $T_A = T_J$ , (unless otherwise specified)

| PARAMETER                             | TEST CONDITIONS                                  | MIN   | TYP  | MAX  | UNIT |
|---------------------------------------|--------------------------------------------------|-------|------|------|------|
| COMP source current                   | FB = 1.3 V, COMP = 3.5 V                         | −0.25 | −0.5 |      | mA   |
| PWM SECTION                           |                                                  |       |      |      |      |
| Maximum duty cycle                    | Measured at OUTA or OUTB                         | 48%   | 49%  | 50%  |      |
| Minimum duty cycle                    | COMP = 0 V                                       |       |      | 0%   |      |
| CURRENT SENSE SECTION                 |                                                  |       |      |      |      |
| Gain <sup>(3)</sup>                   |                                                  | 1.9   | 2.2  | 2.5  | V/V  |
| Maximum input signal                  | COMP = 5 V <sup>(4)</sup>                        | 0.45  | 0.5  | 0.55 | V    |
| CS to output delay                    | COMP = 3.5 V, CS from 0 to 600 mV                |       | 100  | 200  | ns   |
| CS source current                     |                                                  | −200  |      |      | nA   |
| Over current threshold                |                                                  | 0.7   | 0.75 | 0.8  | V    |
| COMP to CS offset                     | CS = 0 V                                         | 0.35  | 0.8  | 1.2  | V    |
| OUTPUT SECTION                        |                                                  |       |      |      |      |
| OUT low level                         | I = 100 mA                                       |       | 0.5  | 1    | V    |
| OUT high level                        | I = − 50 mA, VDD − OUT                           |       | 0.5  | 1    | V    |
| Rise time                             | C <sub>L</sub> = 1 nF                            |       | 25   | 60   | ns   |
| Fall time                             | C <sub>L</sub> = 1 nF                            |       | 25   | 60   | ns   |
| UNDERVOLTAGE LOCKOUT SECTION          |                                                  |       |      |      |      |
| Start threshold                       | UCCx808-1 <sup>(1)</sup>                         | 11.5  | 12.5 | 13.5 | V    |
|                                       | UCCx808-2                                        | 4.1   | 4.3  | 4.5  |      |
| Minimum operating voltage after start | UCCx808-1                                        | 7.6   | 8.3  | 9    | V    |
|                                       | UCCx808-2                                        | 3.9   | 4.1  | 4.3  |      |
| Hysteresis                            | UCCx808-1                                        | 3.5   | 4.2  | 5.1  | V    |
|                                       | UCCx808-2                                        | 0.1   | 0.2  | 0.3  |      |
| SOFT-START SECTION                    |                                                  |       |      |      |      |
| COMP rise time                        | FB = 1.8 V, rise from 0.5 V to 4 V               |       | 3.5  | 20   | ms   |
| OVERALL SECTION                       |                                                  |       |      |      |      |
| Start-up current                      | VDD < start threshold                            |       | 130  | 260  | μA   |
| Operating supply current              | FB = 0 V, CS = 0 V <sup>(5)</sup> <sup>(1)</sup> |       | 1    | 2    | mA   |
| VDD zener shunt voltage               | IDD = 10 mA <sup>(6)</sup>                       | 13    | 14   | 15   | V    |

$$A = \frac{\Delta V_{\text{COMP}}}{\Delta V_{\text{CS}}}, 0 \leq V_{\text{CS}} \leq 0.4\text{ V}$$

- (3) Gain is defined by:  $A = \frac{\Delta V_{\text{COMP}}}{\Delta V_{\text{CS}}}, 0 \leq V_{\text{CS}} \leq 0.4\text{ V}$   
(4) Parameter measured at trip point of latch with FB at 0 V.  
(5) For UCCx808 – 1, set  $V_{DD}$  above the start threshold before setting at 10 V  
(6) Start threshold and Zener shunt threshold track one another.

## 6.5 Typical Characteristics

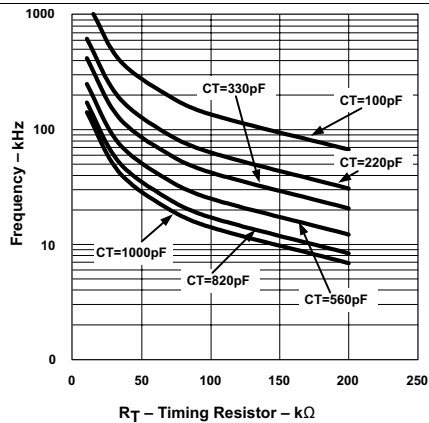


Figure 1. Frequency vs Timing Resistor

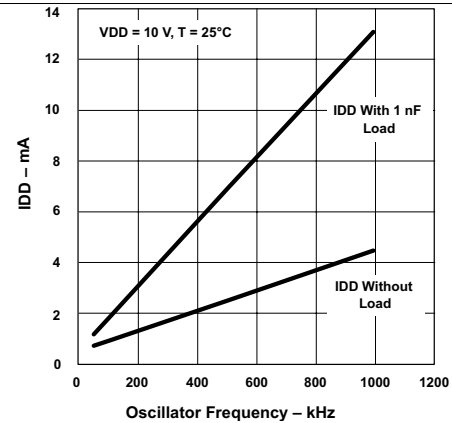


Figure 2. IDD vs Oscillator Frequency

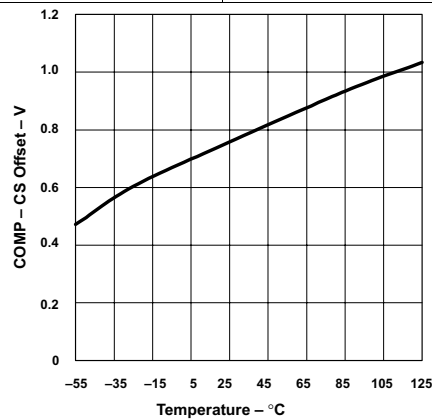


Figure 3. CS Offset vs Temperature

## 7 Detailed Description

### 7.1 Overview

The UCCx808-x device is a highly-integrated, low power current mode push-pull PWM controller. The controller employs low starting current, and employs an internal control algorithm that offers accurate static output voltage regulation against line and load. The UCCx808-x family offers a variety of package temperature range options, and choice of undervoltage lockout levels. The family has UVLO thresholds and hysteresis options for offline and battery-powered system.


**Table 1. Undervoltage Lockout Levels**

| PART NUMBER | TURN ON THRESHOLD | TURN OFF THRESHOLD |
|-------------|-------------------|--------------------|
| UCCx808-1   | 12.5 V            | 8.3 V              |
| UCCx808-2   | 4.3 V             | 4.1 V              |

**Table 2. Undervoltage Lockout Options**

| $T_A = T_J$   | PACKAGED DEVICES |            |            |
|---------------|------------------|------------|------------|
|               | UVLO OPTION      | SOIC (D)   | PDIP (N)   |
| –40°C to 85°C | 12.5 V/8.3 V     | UCC2808D-1 | UCC2808N-1 |
|               | 4.3 V/4.1 V      | UCC2808D-2 | UCC2808N-2 |
| 0°C to 70°C   | 12.5 V/8.3 V     | UCC3808D-1 | UCC3808N-1 |
|               | 4.3 V/4.1 V      | UCC3808D-2 | UCC3808N-2 |


### 7.2 Functional Block Diagram

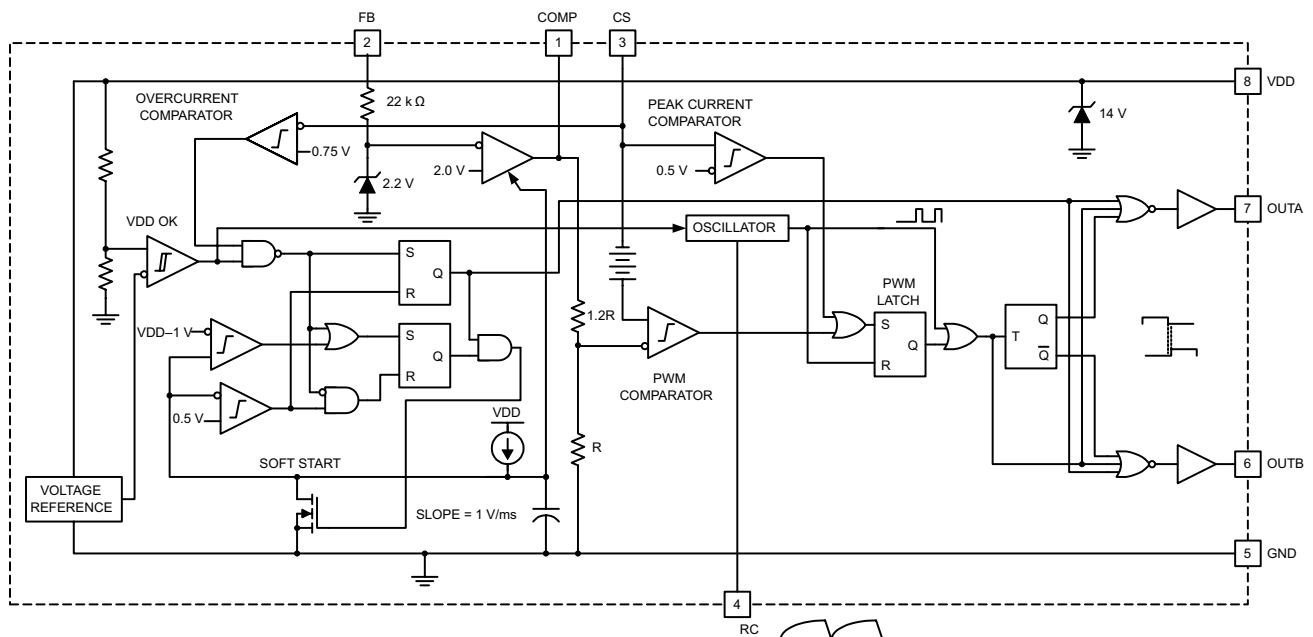

Pinout shown is for SOIC and PDIP packages.

**Figure 4. Functional Block Diagram**

## Functional Block Diagram (continued)

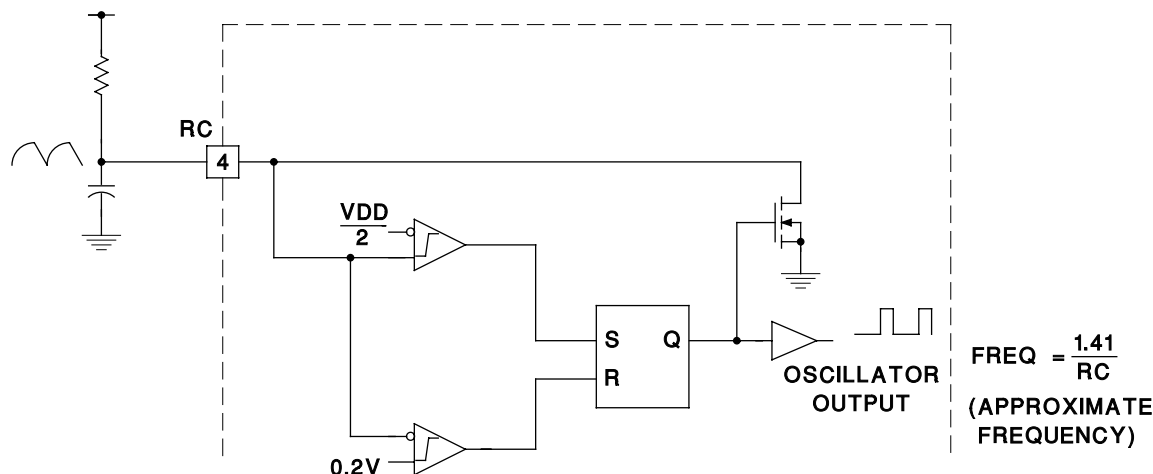

The oscillator generates a sawtooth waveform on RC. During the RC rise time, the output stages alternate on time, but both stages are off during the RC fall time. The output stages switch at ½ the oscillator frequency, with guaranteed duty cycle of <50% for both outputs.

**Figure 5. Block Diagram for Oscillator**

## 7.3 Feature Description

### 7.3.1 Pin Descriptions

**COMP:** COMP is the output of the error amplifier and the input of the PWM comparator. The error amplifier in the UCC3808 is a true low-output impedance, 2-MHz operational amplifier. As such, the COMP pin can both source and sink current. However, the error amplifier is internally current limited, so that zero duty cycle can be externally forced by pulling COMP to GND.

The UCC3808 family features built-in full cycle soft-start. Soft-start is implemented as a clamp on the maximum COMP voltage.

**CS:** The input to the PWM, peak current, and overcurrent comparators. The overcurrent comparator is only intended for fault sensing. Exceeding the overcurrent threshold will cause a soft-start cycle.

**FB:** The inverting input to the error amplifier. For best stability, keep FB lead length as short as possible and FB stray capacitance as small as possible.

**GND:** Reference ground and power ground for all functions. Due to high currents, and high frequency operation of the UCC3808, a low impedance circuit board ground plane is highly recommended.

**OUTA and OUTB:** Alternating high current output stages. Both stages are capable of driving the gate of a power MOSFET. Each stage is capable of 500-mA peak source current, and 1-A peak sink current.

The output stages switch at half the oscillator frequency, in a push/pull configuration. When the voltage on the RC pin is rising, one of the two outputs is high, but during fall time, both outputs are off. This dead time between the two outputs, along with a slower output rise time than fall time, insures that the two outputs can not be on at the same time. This dead time is typically 60 ns to 200 ns and depends upon the values of the timing capacitor and resistor.

The high-current output drivers consist of MOSFET output devices, which switch from VDD to GND. Each output stage also provides a very low impedance to overshoot and undershoot. This means that in many cases, external schottky clamp diodes are not required.

**RC:** The oscillator programming pin. The oscillator of the UCC3808-x tracks VDD and GND internally, so that variations in power supply rails minimally affect frequency stability. Figure 5 shows the oscillator block diagram.

Only two components are required to program the oscillator: a resistor (tied to the VDD and RC), and a capacitor (tied to the RC and GND). The approximate oscillator frequency is determined by the simple formula:

## Feature Description (continued)

$$f_{\text{OSCILLATOR}} = \frac{1.41}{RC}$$

where

- frequency is in hertz, resistance in ohms, and capacitance in farads. (1)

The recommended range of timing resistors is between 10 kΩ and 200 kΩ and range of timing capacitors is between 100 pF and 1000 pF. Timing resistors less than 10 kΩ must be avoided.

For best performance, keep the timing capacitor lead to GND as short as possible, the timing resistor lead from VDD as short as possible, and the leads between timing components and RC as short as possible. Separate ground and VDD traces to the external timing network are encouraged.

VDD: The power input connection for this device. Although quiescent VDD current is very low, total supply current will be higher, depending on OUTA and OUTB current, and the programmed oscillator frequency. Total VDD current is the sum of quiescent VDD current and the average OUT current. Knowing the operating frequency and the MOSFET gate charge (Q<sub>g</sub>), average OUT current can be calculated from:

$$I_{\text{OUT}} = Q_g F$$

where

- F is frequency To prevent noise problems, bypass VDD to GND with a ceramic capacitor as close to the chip as possible along with an electrolytic capacitor. (2)

A 1-μF decoupling capacitor is recommended.

## 7.4 Device Functional Modes

### 7.4.1 VCC

When VCC becomes above 12.5 V (for UCCx808-1) or 4.3 V (for UCCx808-2), the device is enable, and after all fault conditions are cleared, the gate driver starts with soft-start. When VCC drops below 8.3 V (for UCCx808-1) or 4.1 V (for UCCx808-2), the device enters the UVLO protection mode and both gate drivers are actively pulled low.

## 8 Application and Implementation

### NOTE


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 8.1 Application Information

The UCCx808-x PWM controller contains all of the features needed to implement push-pull topology, using current-mode control in a small 8-pin package. The UCCx808-x is designed for current-mode control push-pull topology. UCCx808-x employs advantages of current-mode control, peak current sense, overcurrent protection.

### 8.2 Typical Application

A 200-kHz push-pull application circuit with a full wave rectifier is shown in [Figure 6](#).

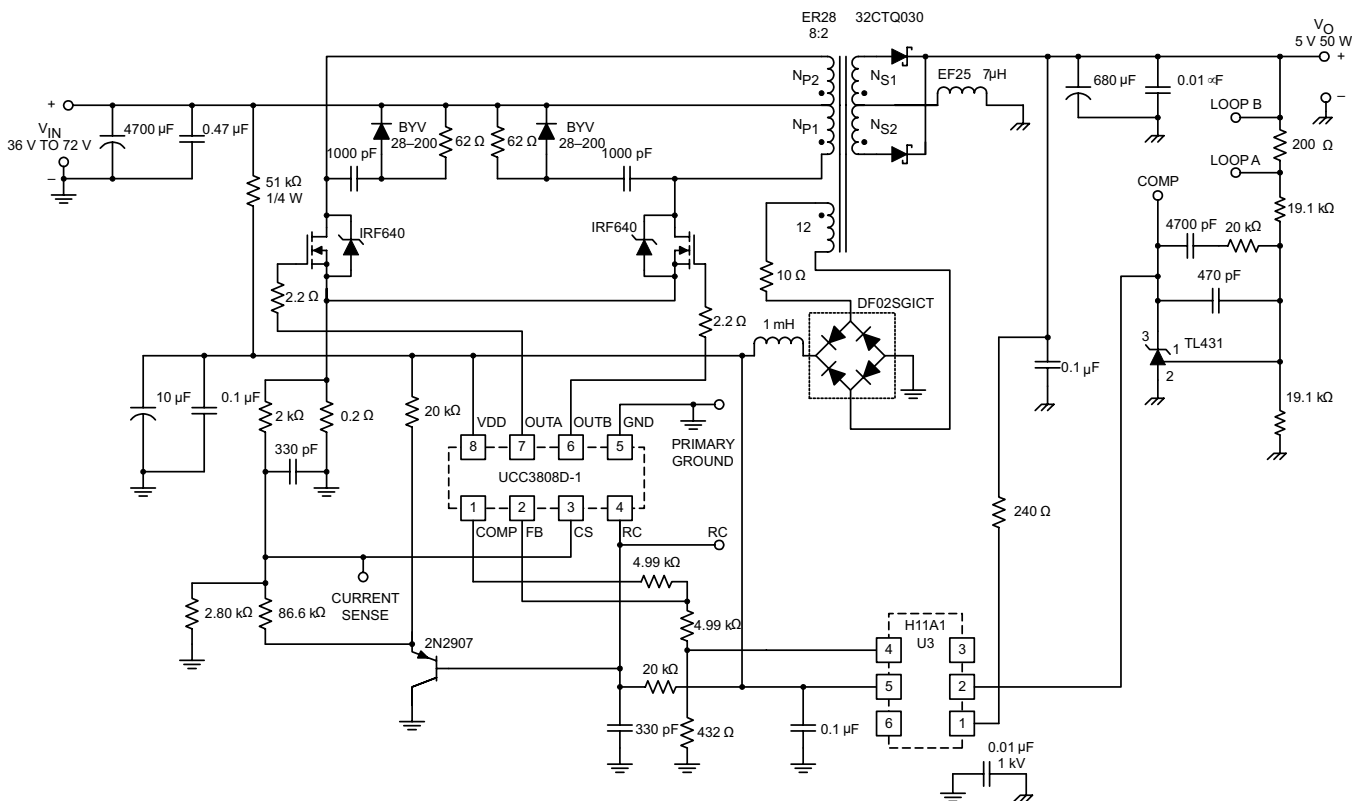

**Figure 6. Typical Application Diagram: 48-V In, 5-V, 50-W Output**

#### 8.2.1 Design Requirements

[Table 3](#) lists the design parameters of the UCC3808-x.

**Table 3. Design Parameters**



| DESIGN PARAMETER       | TARGET VALUE |
|------------------------|--------------|
| Output voltage         | 5 V          |
| Rated output power     | 50 W         |
| Input DC voltage range | 36 V to 72 V |
| Switching frequency    | 210 kHz      |

## 8.2.2 Detailed Design Procedure

The output, VO, provides 5 V at 75 W maximum and is electrically isolated from the input. Since the UCC3808 is a peak current mode controller the 2N2222A emitter following amplifier (buffers the CT waveform) provides slope compensation which is necessary for duty ratios greater than 50%. Capacitor decoupling is very important with a single ground IC controller, and a 1  $\mu$ F is suggested as close to the IC as possible. The controller supply is a series RC for start-up, paralleled with a bias winding on the output inductor used in steadystate operation.

Isolation is provided by an optocoupler with regulation done on the secondary side using the UC3965 Precision Reference with Low Offset Error Amplifier. Small signal compensation with tight voltage regulation is achieved using this part on the secondary side. Many choices exist for the output inductor depending on cost, volume, and mechanical strength. Several design options are iron powder, molypermalloy (MPP), or a ferrite core with an air gap as shown here. The main power transformer is a low profile design, EFD size 25, using Magnetics Inc. P material which is a good choice at this frequency and temperature. The input voltage may range from 36 V DC to 72 V DC.

## 8.2.3 Application Curves

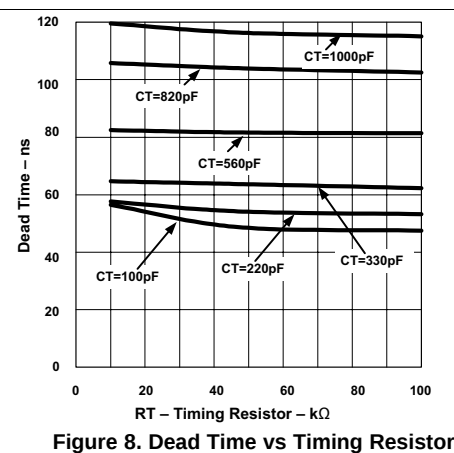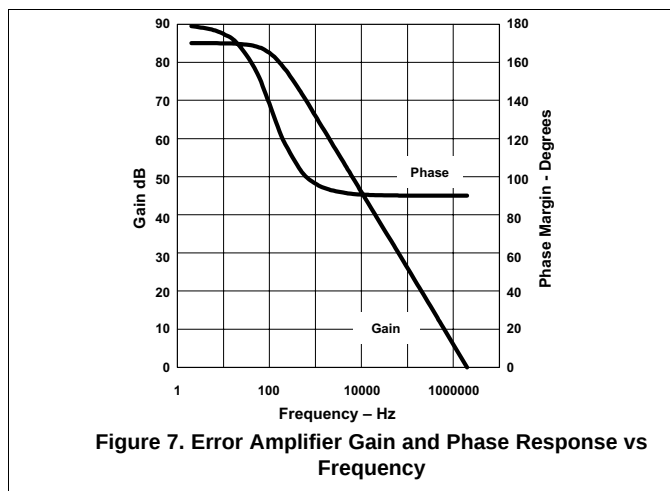

## 9 Power Supply Recommendations

The VDD power terminal for the device requires the placement of electrolytic capacitor as energy storage capacitor, because of UCCx808-x is controller with 1-A driver capability. And requires the placement of low-ESR noise-decoupling capacitance as directly as possible from the VDD terminal to the GND terminal, ceramic capacitors with stable dielectric characteristics over temperature are recommended, such as X7R or better. The recommended electrolytic capacitor is a 10- $\mu$ F or 25-V capacitor.


The recommended decoupling capacitors are a 0.1- $\mu$ F 0603-sized 25-V X7R capacitor.

## 10 Layout

### 10.1 Layout Guidelines

1. Locate the VDD capacitor as close as possible between the VDD terminal and GND of the UCCx808-x, tracked directly to both terminals.
2. A small, external filter capacitor is recommended on the CS terminal. Track the filter capacitor as directly as possible from the CS to GND terminal.
3. The tracking and layout of the FB terminal and connecting components is critical to minimizing noise pick-up and interference in the magnetic sensing block. Reduce the total surface area of trances on the FB net to a minimum.
4. The OUTA/OUTB terminal has high internal sink/source current capability. An external gate resistor is recommended. The value depends on the choice of power MOSFET, efficiency and EMI considerations. A pulldown resistor on the gate of the external MOSFET is recommended to prevent the MOSFET gate from floating on if there is an open-circuit error in the gate drive path.

### 10.2 Layout Example

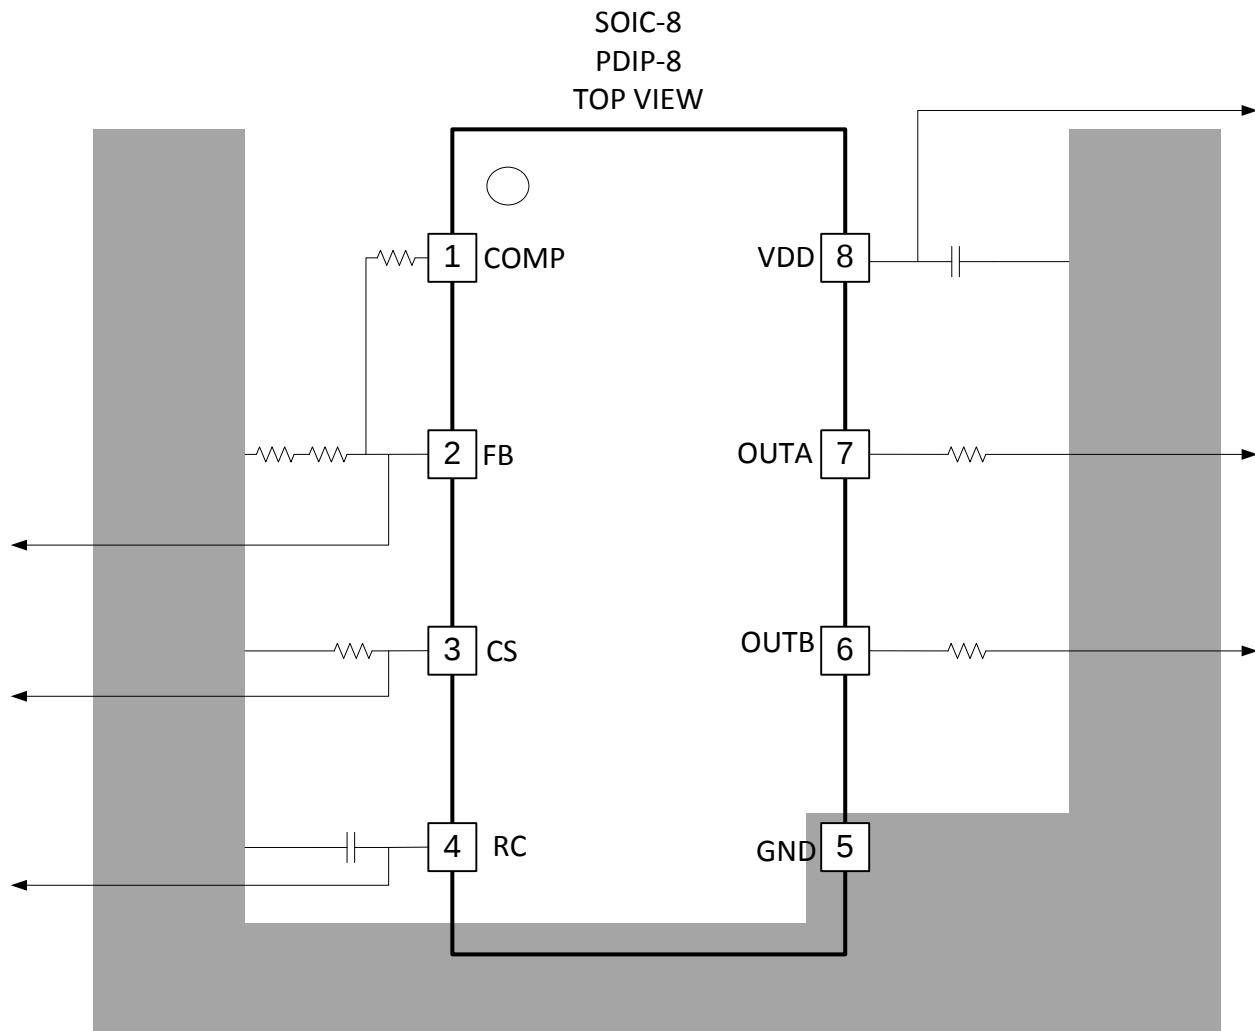

**Figure 9. Layout Example**

## 11 Device and Documentation Support

### 11.1 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

**Table 4. Related Links**

| PARTS     | PRODUCT FOLDER             | SAMPLE & BUY               | TECHNICAL DOCUMENTS        | TOOLS & SOFTWARE           | SUPPORT & COMMUNITY        |
|-----------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| UCC2808-1 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| UCC2808-2 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| UCC3808-1 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| UCC3808-2 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |

### 11.2 Documentation Support

#### 11.2.1 Related Documentation

For related documentation, see the following:

Power Supply Control Data Book ([SLUD003](#))

### 11.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 11.4 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 11.5 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 11.6 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number        | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6)      |
|------------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|--------------------------|
| <a href="#">UCC2808D-1</a>   | Obsolete      | Production           | SOIC (D)   8   | -                     | -           | Call TI                              | Call TI                           | -40 to 85    | 2808-1                   |
| <a href="#">UCC2808D-2</a>   | Obsolete      | Production           | SOIC (D)   8   | -                     | -           | Call TI                              | Call TI                           | -40 to 85    | 2808-2                   |
| <a href="#">UCC2808DTR-1</a> | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | 2808-1                   |
| <a href="#">UCC2808DTR-2</a> | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | 2808-2                   |
| UCC2808DTR-2G4               | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | 2808-2                   |
| <a href="#">UCC3808D-1</a>   | Obsolete      | Production           | SOIC (D)   8   | -                     | -           | Call TI                              | Call TI                           | 0 to 70      | 3808-1                   |
| <a href="#">UCC3808D-2</a>   | Obsolete      | Production           | SOIC (D)   8   | -                     | -           | Call TI                              | Call TI                           | 0 to 70      | 3808-2                   |
| <a href="#">UCC3808DTR-1</a> | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | (3808-1, UCC3808)<br>D-1 |
| <a href="#">UCC3808DTR-2</a> | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | 3808-2                   |
| <a href="#">UCC3808N-1</a>   | Obsolete      | Production           | PDIP (P)   8   | -                     | -           | Call TI                              | Call TI                           | 0 to 70      | UCC3808N-1               |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "--" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal


| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| UCC2808DTR-1 | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| UCC2808DTR-2 | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| UCC3808DTR-1 | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| UCC3808DTR-2 | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| UCC2808DTR-1 | SOIC         | D               | 8    | 2500 | 353.0       | 353.0      | 32.0        |
| UCC2808DTR-2 | SOIC         | D               | 8    | 2500 | 353.0       | 353.0      | 32.0        |
| UCC3808DTR-1 | SOIC         | D               | 8    | 2500 | 353.0       | 353.0      | 32.0        |
| UCC3808DTR-2 | SOIC         | D               | 8    | 2500 | 353.0       | 353.0      | 32.0        |




**D0008A**

# PACKAGE OUTLINE

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

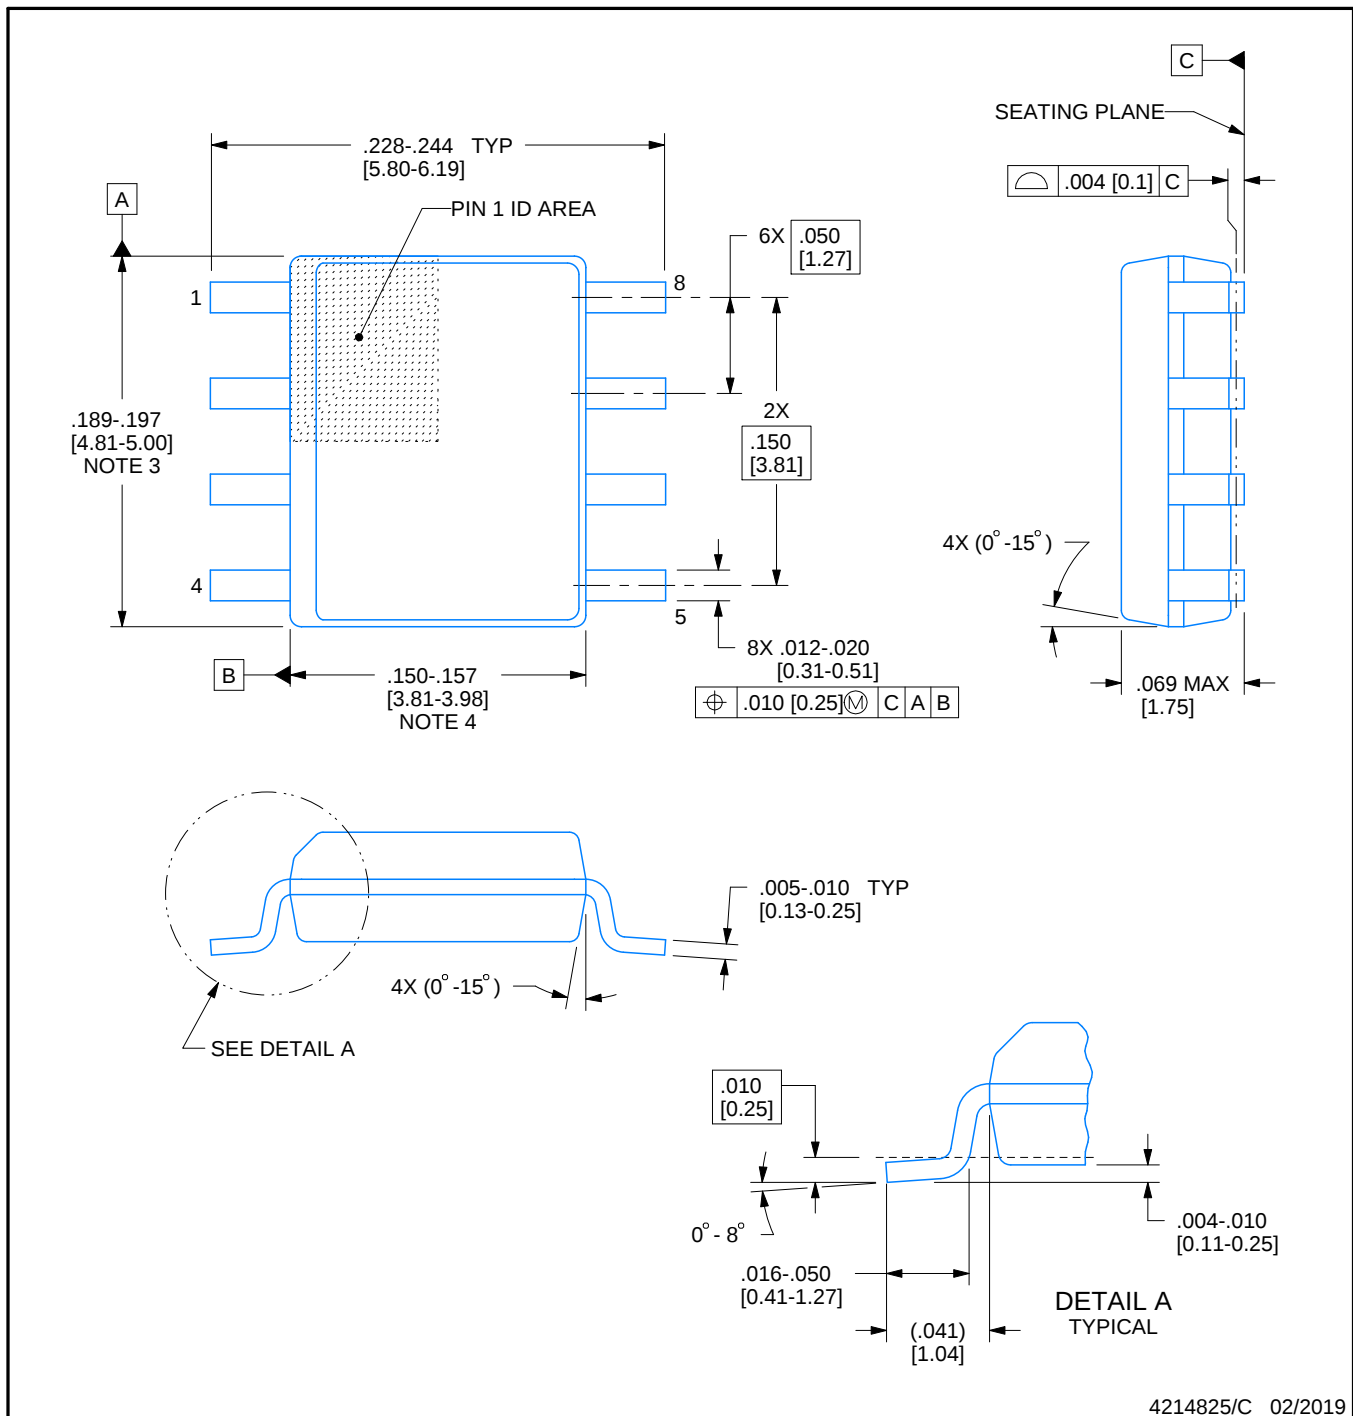

## NOTES:


- Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- This drawing is subject to change without notice.
- This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
- This dimension does not include interlead flash.
- Reference JEDEC registration MS-012, variation AA.

# EXAMPLE BOARD LAYOUT


D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

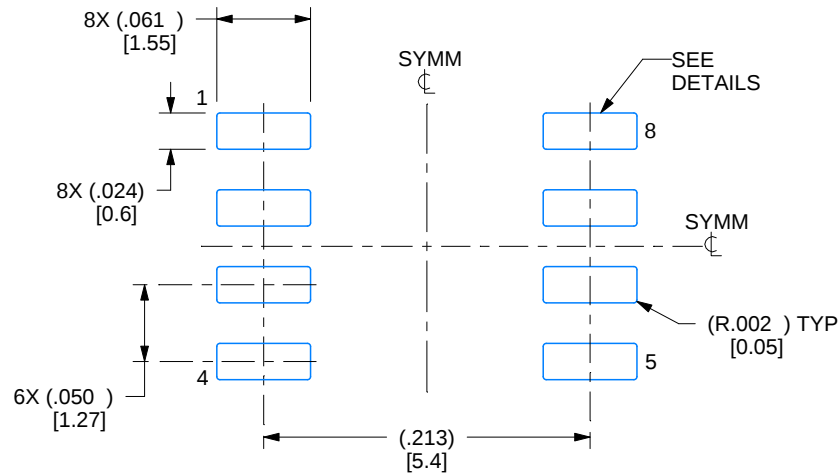

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:8X

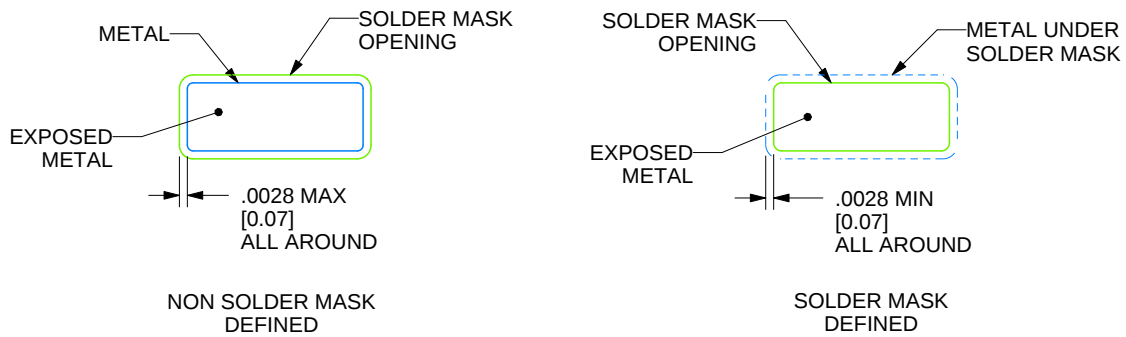

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

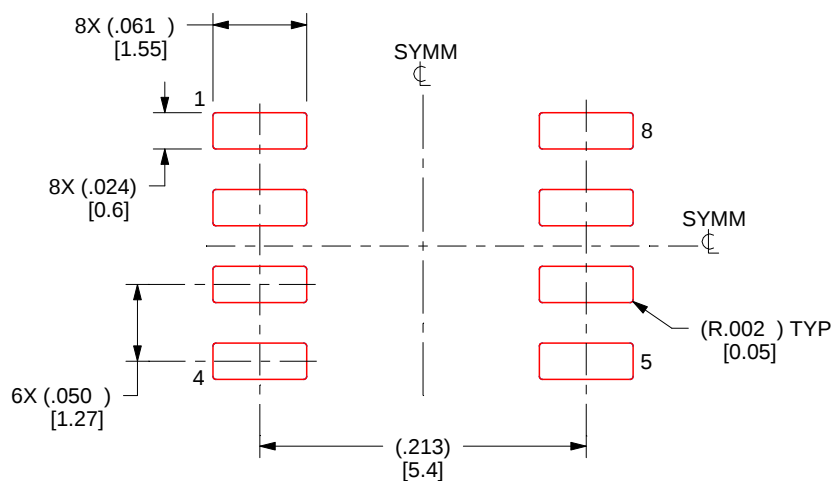

SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X


4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE

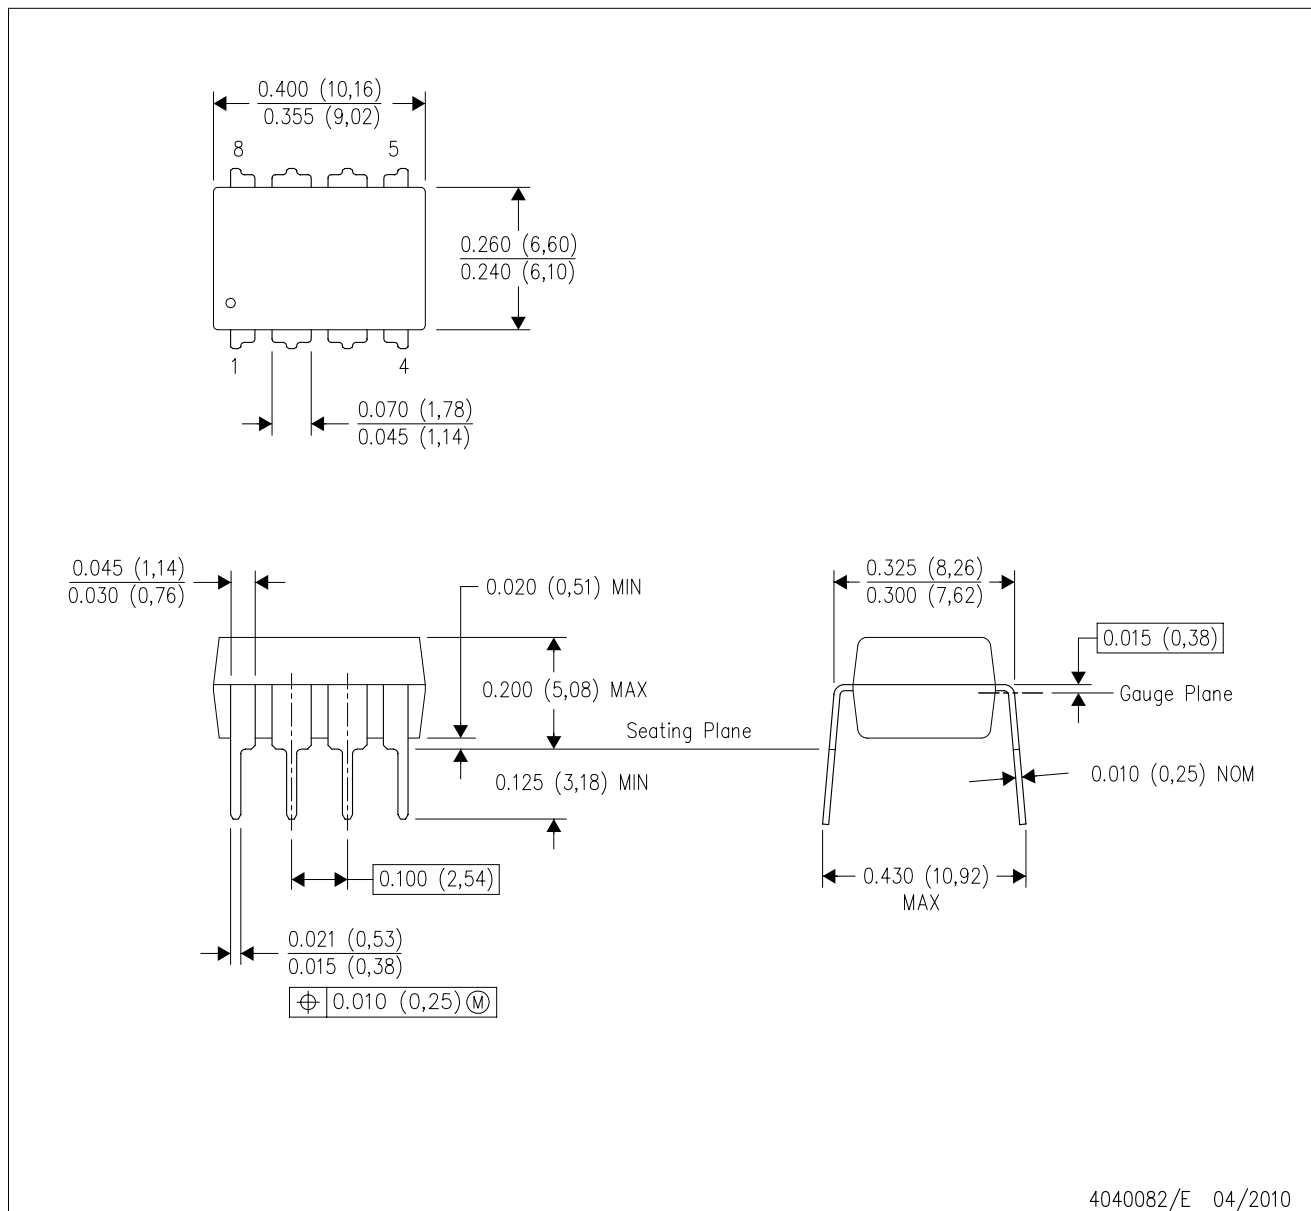

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001 variation BA.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated