


# OPTIREG™ linear TLE42344G

## Low-dropout linear voltage regulator



### Features

- Output voltage tolerance  $\leq \pm 2\%$
- Low dropout voltage
- Output current up to 100 mA
- Very low current consumption
- Overtemperature shutdown
- Output current limitation
- Suitable for use in automotive electronics
- Reverse polarity protection
- Green Product (RoHS compliant)

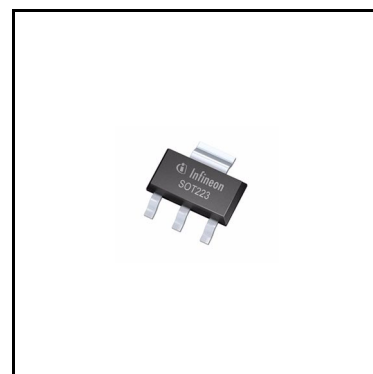

### Potential applications

General automotive applications.

### Product validation

Qualified for automotive applications. Product validation according to AEC-Q100.

### Description

The TLE42344G is a 5-V low-dropout fixed-voltage regulator in a PG-SOT223-4 package. The IC regulates an input voltage  $V_I$  in the range  $5.5\text{ V} < V_I < 45\text{ V}$  to  $V_{\text{Qrated}} = 5.0\text{ V}$ . The maximum output current is more than 100 mA. This IC is protected against short circuit and overheating by the integrated output current limitation and the overtemperature shutdown.


Type	Package	Marking
TLE42344G	PG-SOT223-4	42344

## Table of contents

	<b>Features</b> .....	<b>1</b>
	<b>Potential applications</b> .....	<b>1</b>
	<b>Product validation</b> .....	<b>1</b>
	<b>Description</b> .....	<b>1</b>
	<b>Table of contents</b> .....	<b>2</b>
<b>1</b>	<b>Block diagram</b> .....	<b>3</b>
<b>2</b>	<b>Pin configuration</b> .....	<b>4</b>
2.1	Pin assignment .....	4
2.2	Pin definitions and functions .....	4
<b>3</b>	<b>General product characteristics</b> .....	<b>5</b>
3.1	Absolute maximum ratings .....	5
3.2	Functional range .....	6
3.3	Thermal resistance .....	6
<b>4</b>	<b>Circuit description</b> .....	<b>7</b>
<b>5</b>	<b>Electrical characteristics</b> .....	<b>8</b>
5.1	Electrical characteristics voltage regulator .....	8
<b>6</b>	<b>Typical performance characteristics voltage regulator</b> .....	<b>9</b>
<b>7</b>	<b>Application information</b> .....	<b>11</b>
7.1	Further application information .....	11
<b>8</b>	<b>Package information</b> .....	<b>12</b>
<b>9</b>	<b>Revision history</b> .....	<b>13</b>

## Block diagram

### 1 Block diagram

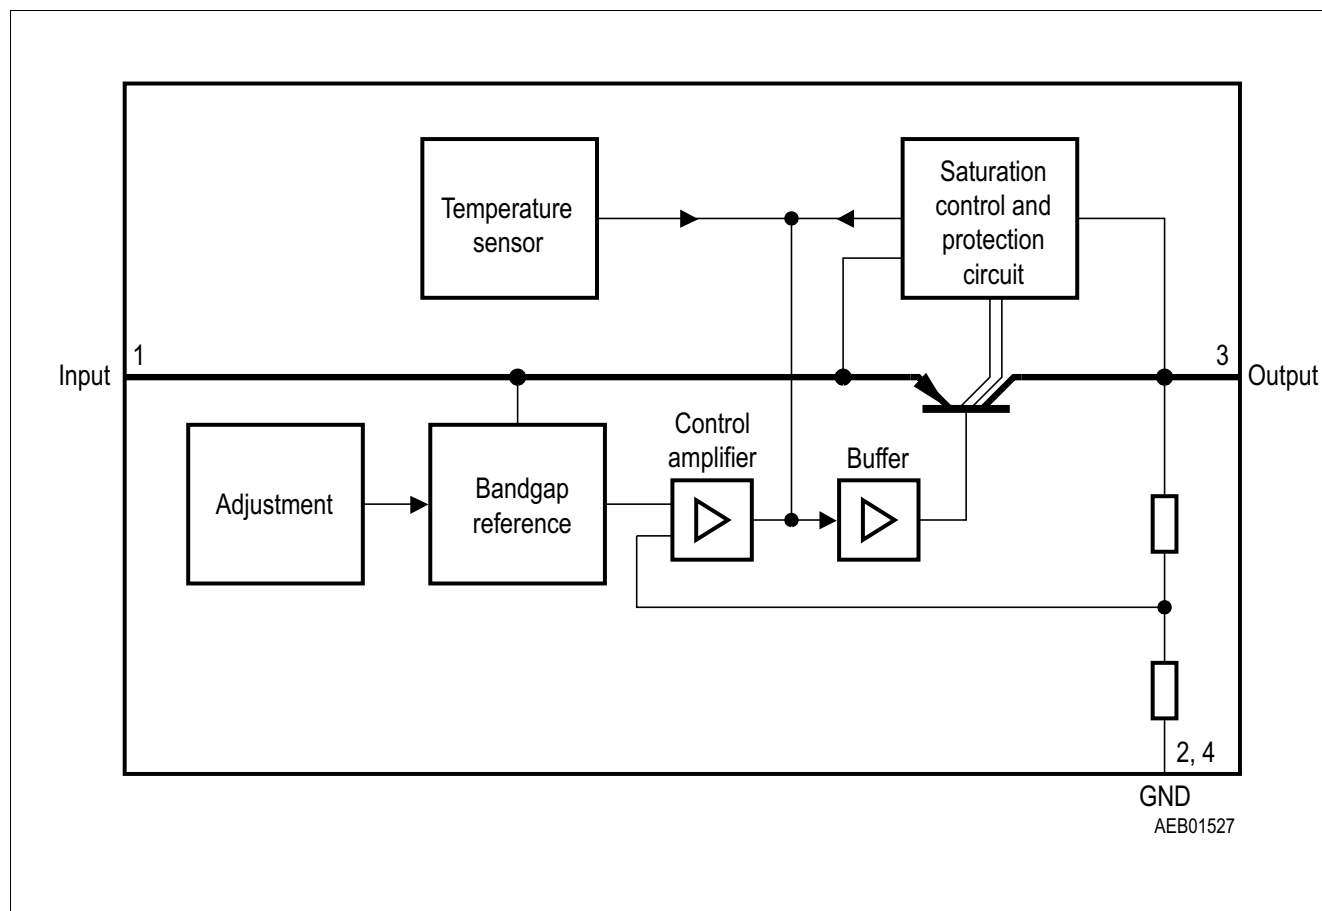

**Figure 1** Block diagram

Pin configuration

2 Pin configuration

2.1 Pin assignment

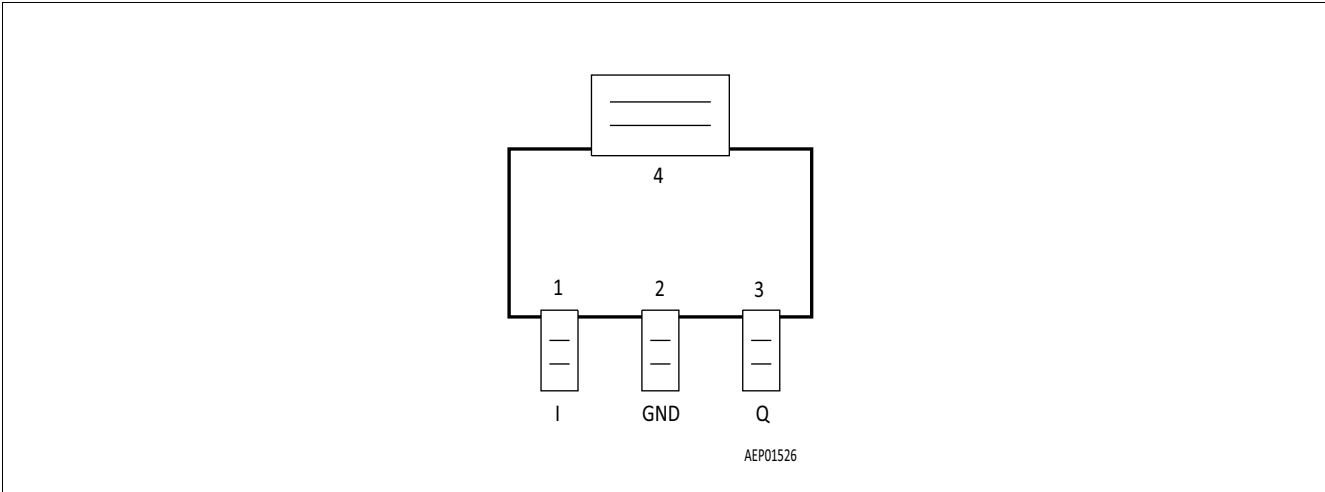


Figure 2 Pin configuration

2.2 Pin definitions and functions

Table 1 Pin definitions and functions

Pin	Symbol	Function
1	I	<b>Input voltage</b> Block to ground directly on the IC with ceramic capacitor
2, 4	GND	<b>Ground</b>
3	Q	<b>5-V output voltage</b> Block to ground with capacitor $\geq 10 \mu\text{F}$ , $\text{ESR} \leq 10 \Omega$

### 3 General product characteristics

#### 3.1 Absolute maximum ratings

**Table 2 Absolute maximum ratings<sup>1)</sup>**

$T_j = -40^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$ ; all voltages with respect to ground, positive current flowing into pin  
(unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Input							
Input voltage	$V_I$	-30	–	45	V	–	P_4.1.1
Output							
Output voltage	$V_Q$	-1	–	32	V	–	P_4.1.2
Temperatures							
Junction temperature	$T_j$	-40	–	150	°C	–	P_4.1.3
Storage temperature	$T_{\text{stg}}$	-50	–	150	°C	–	P_4.1.4
ESD susceptibility							
ESD resistivity to GND	$V_{\text{ESD}}$	-4	–	4	kV	<sup>2)</sup> HBM	P_4.1.5
ESD resistivity to GND	$V_{\text{ESD}}$	-1.5	–	1.5	kV	<sup>3)</sup> CDM	P_4.1.6

1) Not subject to production test, specified by design.

2) ESD susceptibility, HBM according to EIA/JESD 22-A114B.

3) ESD susceptibility, Charged Device Model “CDM” EIA/JESD22-C101 or ESDA STM5.3.1.

#### Notes

1. Stresses above the ones listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.
2. Integrated protection functions are designed to prevent IC destruction under fault conditions described in the datasheet. Fault conditions are considered as “outside” normal operating range. Protection functions are not designed for continuous repetitive operation.

**General product characteristics**

### 3.2 Functional range

**Table 3 Functional range**

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Input voltage	$V_I$	5.5	–	45	V	–	P_4.2.1
Junction temperature	$T_j$	-40	–	150	°C	–	P_4.2.2

*Note:* Within the functional or operating range, the IC operates as described in the circuit description. The electrical characteristics are specified within the conditions given in the electrical characteristics table.

### 3.3 Thermal resistance

*Note:* This thermal data was generated in accordance with JEDEC JESD51 standards. For more information, go to [www.jedec.org](http://www.jedec.org).

**Table 4 Thermal resistance**

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Junction to case	$R_{thJC}$	–	17	–	K/W	<sup>1)</sup> Measured to heat slug	P_4.3.1
Junction to ambient	$R_{thJA}$	–	54	–	K/W	<sup>1)2)</sup>	P_4.3.2
Junction to ambient	$R_{thJA}$	–	139	–	K/W	<sup>1)3)</sup> Footprint only	P_4.3.3
Junction to ambient	$R_{thJA}$	–	73	–	K/W	<sup>1)3)</sup> 300 mm <sup>2</sup> heatsink area	P_4.3.4
Junction to ambient	$R_{thJA}$	–	64	–	K/W	<sup>1)3)</sup> 600 mm <sup>2</sup> heatsink area	P_4.3.5

1) Not subject to production test, specified by design.

2) Specified  $R_{thJA}$  value is according to Jedec JESD51-2,-5,-7 at natural convection on FR4 2s2p board. The product (chip and package) was simulated on a 76.2 × 114.3 × 1.5 mm<sup>3</sup> board with 2 inner copper layers (2 × 70 μm Cu, 2 × 35 μm Cu). Where applicable, a thermal via array under the exposed pad contacted the first inner copper layer.

3) Specified  $R_{thJA}$  value is according to Jedec JESD 51-3 at natural convection on FR4 1s0p board. The product (chip and package) was simulated on a 76.2 × 114.3 × 1.5 mm<sup>3</sup> board with 1 copper layer (1 × 70 μm Cu).

## Circuit description

### 4 Circuit description

The control amplifier compares a reference voltage, which is kept highly precise by resistance adjustment, to a voltage that is proportional to the output voltage and drives the base of the series transistor via a buffer. Saturation control, working as a function of load current, prevents any oversaturation of the power element.

#### **Dimensioning information on external components**

The input capacitor  $C_i$  is necessary for compensating line influences. The output capacitor  $C_o$  is necessary for the stability of the regulating circuit. Stability is guaranteed at values  $C_o \geq 10 \mu\text{F}$  and an  $\text{ESR} \leq 10 \Omega$  within the operating temperature range.

**Electrical characteristics**

## 5 Electrical characteristics

### 5.1 Electrical characteristics voltage regulator

**Table 5 Electrical characteristics**

$T_j = -40^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$ ;  $V_I = 13.5\text{ V}$ ; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)


Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Output voltage	$V_Q$	4.9	5.0	5.1	V	$5\text{ mA} \leq I_Q \leq 100\text{ mA}$ $6\text{ V} \leq V_I \leq 28\text{ V}$	P_5.1.1
Output current limitation	$I_Q$	120	160	–	mA	–	P_5.1.2
Current consumption $I_q = I_I - I_Q$	$I_q$	–	–	400	$\mu\text{A}$	$I_Q = 1\text{ mA}$	P_5.1.3
Current consumption $I_q = I_I - I_Q$	$I_q$	–	9	15	mA	$I_Q = 100\text{ mA}$	P_5.1.4
Drop voltage	$V_{dr}$	–	0.25	0.5	V	<sup>1)</sup> $I_Q = 100\text{ mA}$	P_5.1.5
Load regulation	$\Delta V_Q$	–	–	40	mV	$I_Q = 5\text{ to }100\text{ mA}$ $V_I = 6\text{ V}$	P_5.1.6
Line regulation	$\Delta V_Q$	–	15	30	mV	$V_I = 6\text{ to }28\text{ V}$ $I_Q = 5\text{ mA}$	P_5.1.7
Power supply ripple rejection	$PSRR$	–	54	–	dB	$f_r = 100\text{ Hz}$ $V_r = 0.5\text{ Vpp}$	P_5.1.8

1) Drop voltage =  $V_I - V_Q$  (measured where  $V_Q$  has dropped 100 mV from the nominal value obtained at  $V_I = 13.5\text{ V}$ ).




## 6 Typical performance characteristics voltage regulator


**Dropout voltage  $V_{DR}$  versus output current  $I_Q$**

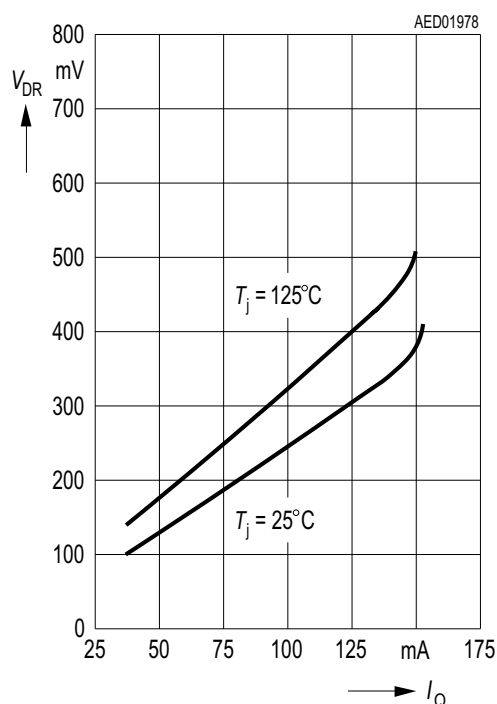


**Current consumption  $I_q$  versus input voltage  $V_I$**

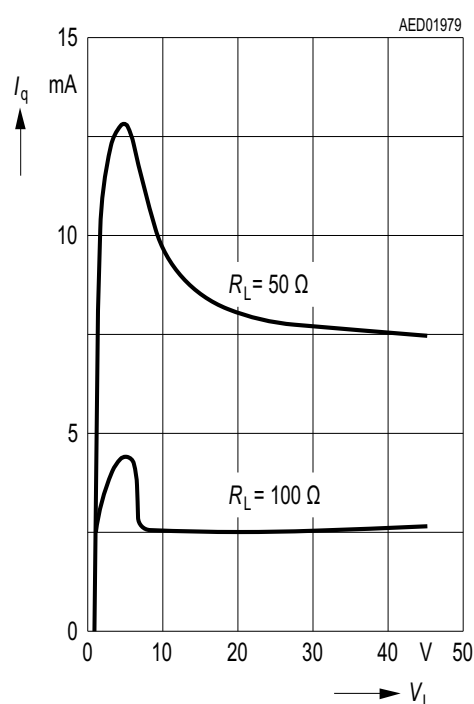

**Current consumption  $I_q$  versus output current  $I_Q$**

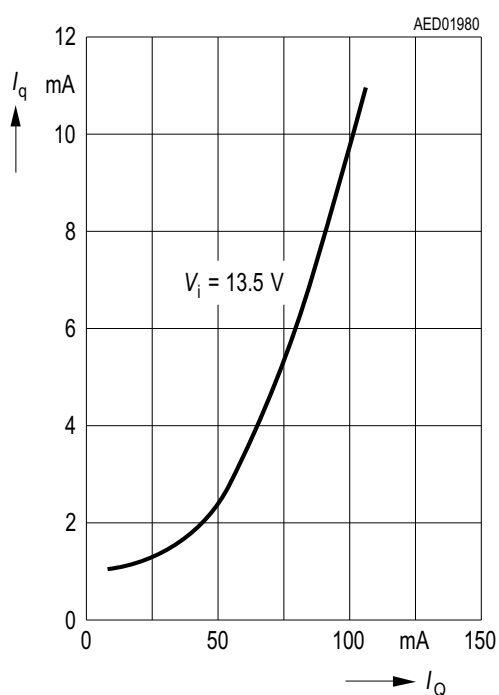


**Current consumption  $I_q$  versus output current  $I_Q$**

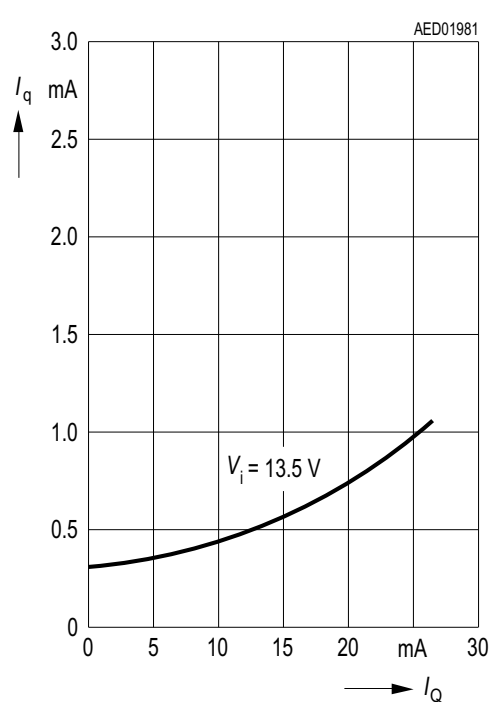


Typical performance characteristics voltage regulator


Output voltage  $V_Q$  versus  
temperature  $T_j$

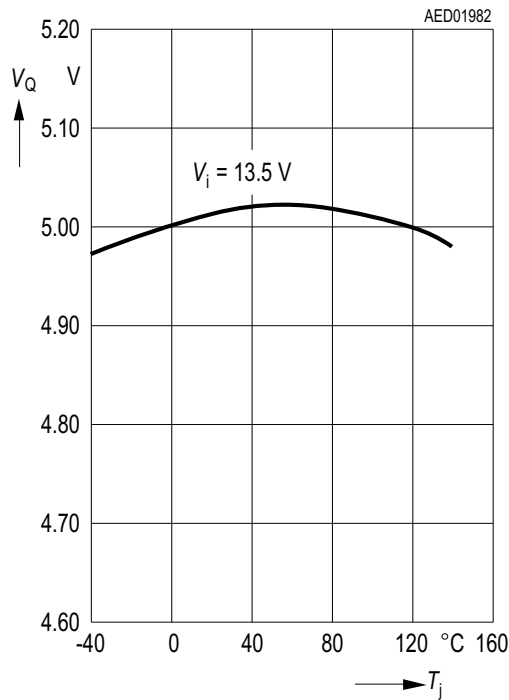

Output current  $I_Q$  versus  
input voltage  $V_i$

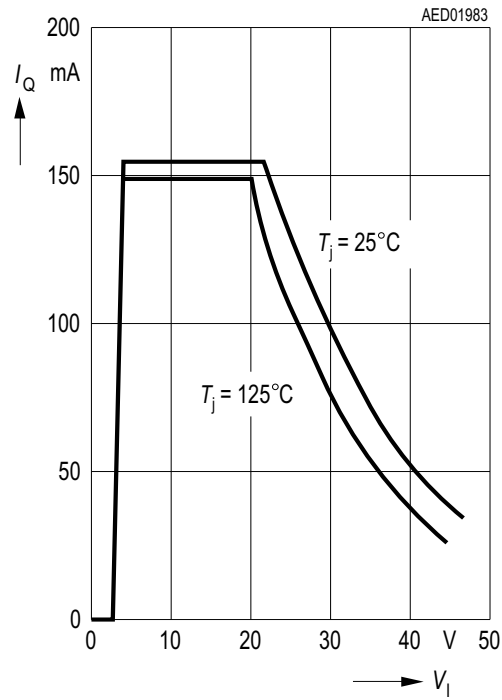


Output voltage  $V_Q$  versus  
input voltage  $V_i$

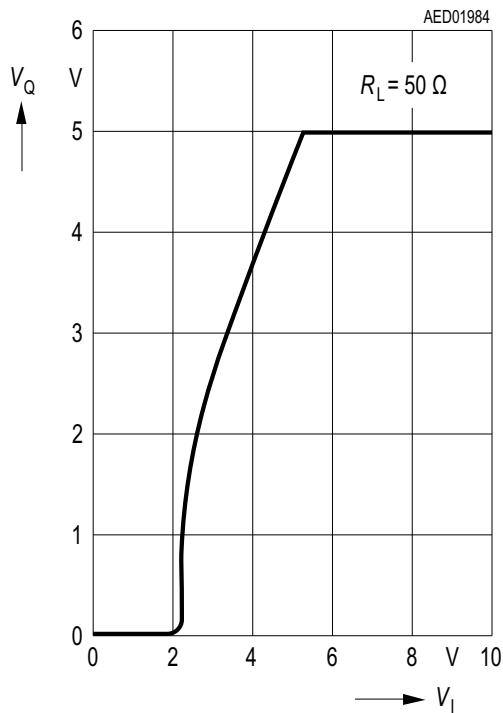

## Application information

### 7 Application information

**Note:** *The following information is given as a hint for the implementation of the device only and shall not be regarded as a description or warranty of a certain functionality, condition or quality of the device.*

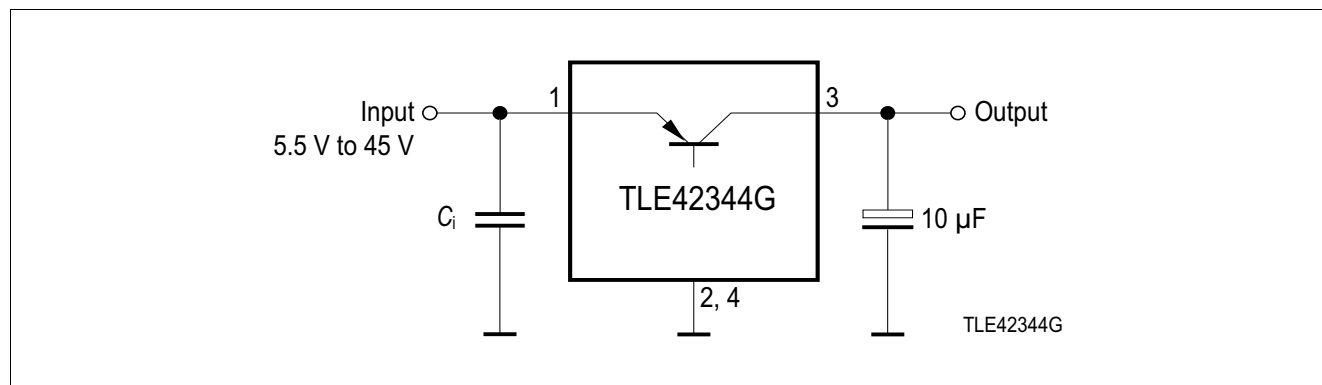

**Figure 3 Application diagram**


**Note:** *This is a very simplified example of an application circuit. The function must be verified in the real application.*

#### 7.1 Further application information

For further information you may contact <https://www.infineon.com/>

**Package information**

## 8 Package information

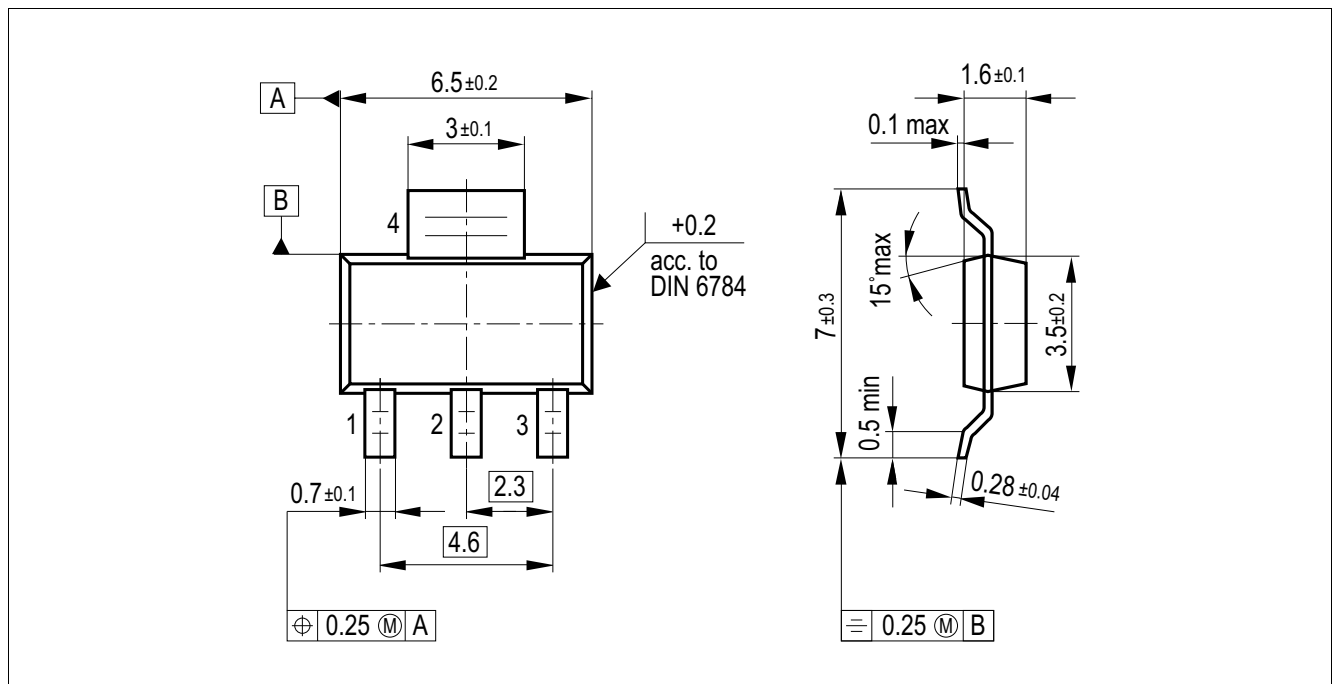

**Figure 4 PG-SOT223-4 (plastic small-outline transistor)<sup>1)</sup>**

### Green Product (RoHS compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a Green Product. Green Products are RoHS compliant (Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

### Further information on packages

<https://www.infineon.com/packages>

<sup>1)</sup> Dimensions in mm

**Revision history**

## **9 Revision history**

<b>Revision</b>	<b>Date</b>	<b>Changes</b>
Rev. 1.1	2023-05-22	Editorial changes
Rev. 1.0	2010-02-08	Initial datasheet

#### Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2023-05-22**

**Published by**

**Infineon Technologies AG**

**81726 Munich, Germany**

**© 2023 Infineon Technologies AG.**

**All Rights Reserved.**

**Do you have a question about any aspect of this document?**

**Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

**Document reference**

**Z8F55246830**

#### IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

#### WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.